

This home has been professionally insulated with

Owens-Corning Fiberglas Insulation

Seg 98
Job 6026



9412 Eagle Valley
#90-091479

To meet the stated thermal resistances (R-Values), the manufacturer provides the following specifications:

Blanket Insulation

Blanket and batt insulation when installed according to the manufacturer's recommendations will provide the stated R-Value.

R-Value	Minimum Thickness
To Obtain an insulation resistance R of:	Installed insulation should not be less than:
R-38	12" Thick
R-30	9½" Thick
R-22	6¾" Thick
R-19	6¼" Thick†
R-13	3⅝" Thick††
R-11	3½" Thick

†R-18 in a 5½" cavity

††R-12.7 in a 3½" cavity

ThermaGlas™

Loose Fill Insulation 03M04250

Stated R-Value is provided by installing the required number of bags per 1,000 sq. ft. at a thickness not less than the label minimum thickness. Installation of the required number of bags may yield more than the specified minimum thickness and minimum sq. ft. weight. Failure by the installer to provide both the required bags and at least the minimum thickness will result in lower insulation R-Value.

Specification For Open Blow Attics

Nominal net weight of insulation per bag is 35 lbs.

R-VALUE	BAGS PER 1000 SQ. FT.	MAXIMUM NET COVERAGE	MINIMUM WEIGHT SQ. FT.	MINIMUM THICKNESS
To obtain an insulation resistance R of:	No. of bags per 1000 sq. ft. of net area shall not be less than:	Contents of this bag should not cover more than:	Weight per sq. ft. of installed insulation should not be less than:	Installed insulation should not be less than:
R-49	33.3	30 Sq. Ft.	1.173	19½ In.
R-44	30.3	33 Sq. Ft.	1.053	17½ In.
R-38	26.3	38 Sq. Ft.	0.910	15¼ In.
R-30	20.4	49 Sq. Ft.	0.718	12 In.
R-26	17.9	56 Sq. Ft.	0.622	10¼ In.
R-22	15.2	66 Sq. Ft.	0.527	8¾ In.
R-19	13.0	77 Sq. Ft.	0.455	7½ In.
R-11	7.5	133 Sq. Ft.	0.263	4½ In.

R means resistance to heat flow. The higher the R-value, the greater the insulating power.

The following products have been installed as specified above:

Type (check appropriate box)						R-value	thickness	no pkgs.	coverage area
	kraft	unfaced	foil	FS-25	loose fill				
Ceilings	☐	☐	☐	☐	☒	30	12	24	1195
	☐	☐	☐	☐	☐				
Floors	☐	☐	☐	☐					
	☐	☐	☐	☐					
Walls	☐	☐	☐	☐					
	☐	☐	☐	☐					

Installed by:

Commercial
3-191

Builder:

Mendoza
signature

date

signature

date

DEPARTMENT OF BUILDING & SAFETY CITY OF LAS VEGAS

☐ PERMIT NUMBER 914 79		INSPECTION NUMBER 340 ⁶⁰²⁶	
JOB ADDRESS 9412 Eagle Valley			
LOT NO 149	BLOCK NO. 98	SUBDIVISION NAME Sun City 4102	
FIRE DEPT MAP NO	JOB PHONE	CALL-IN DATE	CALL-IN TIME
			SCHEDULE DATE 4-18-91
INSPECTOR NO 73	INSPECTOR NAME [Signature]		
INSPECTION REQUESTED		final mechanical	
☐ PARTIAL INSPECTION	☐ PARTIAL APPROVAL (P)	PARTIAL DESCRIPTION	
☒ APPROVED (A)	☐ STOP WORK (S)	☐ COMMENTS (C)	☐ TEMPORARY APPROVAL (T) — UNTIL
☐ REJECTED (R)	☐ REFEED (F)	☐ HOLD (H)	☐ PERMIT REQUIRED
REINSPECTION REQUIRED - CALL 799-2071		REINSPECTION FEE REQUIRED - PAY AT CITY HALL 3RD FLOOR - 400 E. STEWART STREET.	
INSPECTOR SIGNATURE [Signature]		INSPECTION DATE 4/18/91	
☐ PROJECT COMPLETE	BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS SIGNED OFF TO BLDG & SAFETY FOR C. of O ISSUANCE (Commercial Only)		
IF YOU HAVE ANY QUESTIONS ON THIS INSPECTION, YOU MAY CALL THE INSPECTOR FROM 7:00 A.M. - 7:15 A.M OR 2:45 P.M. - 3:00 P.M. AT			

FOR ADDITIONAL ASSISTANCE CALL 386-6251
SEE REVERSE SIDE FOR INSPECTION TYPES

DEPARTMENT OF BUILDING & SAFETY CITY OF LAS VEGAS

☐ PERMIT NUMBER 91479		☐ INSPECTION NUMBER 140		6026
JOB ADDRESS 9412 Eagle Valley				
LOT NO 149	BLOCK NO 98	SUBDIVISION NAME Sun City		
FIRE DEPT MAP NO	JOB PHONE	CALL-IN DATE	CALL-IN TIME	SCHEDULE DATE 4-18-91
INSPECTOR NO 73	INSPECTOR NAME [Signature]			
INSPECTION REQUESTED		final bldg		

☐ PARTIAL INSPECTION	☐ PARTIAL APPROVAL (P)	PARTIAL DESCRIPTION		
☒ APPROVED (A)	☐ STOP WORK (S)	☐ COMMENTS (C)	☐ TEMPORARY APPROVAL (T) - UNTIL	☐ HOLD (H)
☐ REJECTED (R)	REINSPECTION REQUIRED - CALL 799-2071			☐ PERMIT REQUIRED
☐ REFEE (F)	REINSPECTION FEE REQUIRED - PAY AT CITY HALL 3RD FLOOR - 400 E. STEWART STREET.			
INSPECTOR SIGNATURE [Signature]		INSPECTION DATE 4/18/91		
☐ PROJECT COMPLETE	BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS SIGNED OFF TO BLDG & SAFETY FOR C of O ISSUANCE (Commercial Only)			
IF YOU HAVE ANY QUESTIONS ON THIS INSPECTION, YOU MAY CALL THE INSPECTOR FROM 7:00 A.M. - 7:15 A.M. OR 2:45 P.M. - 3:00 P.M. AT				

FOR ADDITIONAL ASSISTANCE CALL 386-6251
SEE REVERSE SIDE FOR INSPECTION TYPES

6026

This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There is no handwriting or other markings on the paper.

☒ APPROVED	☐ PERMIT REQUIRED	☐ STOP WORK
--	--	------------------------------------

INSPECT	DESCRIPTION	INSPECT	DESCRIPTION	INSPECT	DESCRIPTION
☐ B-1	FOOTING, LAYOUT, REBAR, ZONING	☐ P-1	ON SITE SEWER	☐ X-2	UNDERGROUND HYDRO
☐ B-2	STEM WALL – FORMS & REBAR	☐ P-2	ON SITE WATER	☐ X-3	UNDERGROUND FINAL/FLOW
☐ B-3	PRE-SLAB	☐ P-3	BUILDING SEWER (YARD LINES)	☐ X-4	SPRINKLER SYSTEM HYDRO
☐ B-4	ROOF SHEATHING	☐ P-4	UNDERSLAB PLUMBING	☐ X-5	FIRE ALARM
☐ B-5	FRAMING	☐ P-5	TOP OUT-WATER, GAS, WASTE	☐ X-6	OTHER.
☐ B-6	INSULATION	☐ P-6	FINAL GAS TEST	☐ X-7	FINAL FIRE
☐ B-7	DRYWALL NAILING	☐ P-7	FINAL PLUMBING		
☐ B-8	EXTERIOR LATH/STUCCO			☐ E-1	UNDERGROUND ELETRICAL
☐ B-9	WALL GROUT & STEEL	☐ M-1	ROUGH VENT	☐ E-2	ROUGH ELECTRICAL
☐ B-10	☒ POOL PRE-GUNITE	☐ M-2	HOOD	☐ E-3	LOW VOLTAGE ELECTRICAL
☐ B-11	☒ POOL PRE-PLASTER / FINAL	☐ M-3	FINAL MECHANICAL	☐ E-4	SIGN INSPECTION
☐ B-12	BUILDING FINAL			☒ E-5	FINAL ELECTRICAL
☐ B-13	CERT OF OCC.	☐ X-1	KICKER / FLUSH	☐ E-6	TEMP POWER

BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS
SIGNED OFF TO BLDG & SAFETY FOR C of O. ISSUANCE (Commercial Only)

FOR ASSISTANCE -CALL- 386-6251

6026

[illegible]

☒ **APPROVED** ☐ **PERMIT REQUIRED** ☐ **STOP WORK**

☐ REJECTED - CORRECTION NOTICE - REINSPECTION REQUIRED CALL 798-2071

☐ FINAL INSPECTION	BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS SIGNED OFF TO BLDG & SAFETY FOR C. of O ISSUANCE (Commercial Only)
--	--

FOR ASSISTANCE CALL: 386-6251

DEPARTMENT OF BUILDING & SAFETY CITY OF LAS VEGAS

JOB ADDRESS 9412 Eagle Valley			PERMIT NO 91479
LOT NO 149	MAP NO 98	INSPECTOR 85	DATE 2-20-91
SUBDIVISION NAME Sun City			PHONE 4102
INSPECTOR SIGNATURE [Signature]			INSPECTION DATE 2-20-91

☐ PARTIAL INSPECTION - DESCRIPTION:

☒ **APPROVED**
☐ **PERMIT REQUIRED**
☐ **STOP WORK**

☐ **REJECTED - CORRECTION NOTICE - REINSPECTION REQUIRED CALL 789-2071**

INSPECT	DESCRIPTION	INSPECT	DESCRIPTION	INSPECT	DESCRIPTION
☐ B-1	FOOTING, LAYOUT, REBAR, ZONING	☐ P-1	ON SITE SEWER	☐ X-2	UNDERGROUND HYDRO
☐ B-2	STEM WALL - FORMS & REBAR	☐ P-2	ON SITE WATER	☐ X-3	UNDERGROUND FINAL/FLOW
☐ B-3	PRE-SLAB	☐ P-3	BUILDING SEWER (YARD LINES)	☐ X-4	SPRINKLER SYSTEM HYDRO
☐ B-4	ROOF SHEATHING	☐ P-4	UNDERSLAB PLUMBING	☐ X-5	FIRE ALARM
☐ B-5	FRAMING	☐ P-5	TOP OUT-WATER, GAS, WASTE	☐ X-6	OTHER
☐ B-6	INSULATION	☐ P-6	FINAL GAS TEST	☐ X-7	FINAL FIRE
☐ B-7	DRYWALL NAILING	☐ P-7	FINAL PLUMBING		
☒ B-8	EXTERIOR LATH/STUCCO			☐ E-1	UNDERGROUND ELECTRICAL
☐ B-9	WALL GROUT & STEEL	☐ M-1	ROUGH VENT	☐ E-2	ROUGH ELECTRICAL
☐ B-10	POOL PRE-GUNITE	☐ M-2	HOOD	☐ E-3	LOW VOLTAGE ELECTRICAL
☐ B-11	POOL PRE-PLASTER / FINAL	☐ M-3	FINAL MECHANICAL	☐ E-4	SIGN INSPECTION
☐ B-12	BUILDING FINAL			☐ E-5	FINAL ELECTRICAL
☐ B-13	CERT OF OCC	☐ X-1	KICKER / FLUSH	☐ E-6	TEMP POWER

☐ **FINAL INSPECTION**

BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS
SIGNED OFF TO BLDG & SAFETY FOR C. of O. ISSUANCE (Commercial Only)

FOR ASSISTANCE -CALL: 388-6251

DEPARTMENT OF BUILDING & SAFETY CITY OF LAS VEGAS

6036

JOB ADDRESS 9412 Eagle Valley			PERMIT NO 91479	
LOT NO 149	MAP NO 98	INSPECTOR 85	DATE 2-20-91	
SUBDIVISION NAME Sun City			PHONE 4102	
INSPECTOR SIGNATURE [Signature]			INSPECTION DATE 2-20-91	

☐ PARTIAL INSPECTION - DESCRIPTION:

☒ **APPROVED**

☐ **PERMIT REQUIRED**

☐ **STOP WORK**

☐ **REJECTED - CORRECTION NOTICE - REINSPECTION REQUIRED CALL 799-2071**

INSPECT	DESCRIPTION	INSPECT	DESCRIPTION	INSPECT	DESCRIPTION
☐ B-1	FOOTING, LAYOUT, REBAR, ZONING	☐ P-1	ON SITE SEWER	☐ X-2	UNDERGROUND HYDRO
☐ B-2	STEM WALL - FORMS & REBAR	☐ P-2	ON SITE WATER	☐ X-3	UNDERGROUND FINAL/FLOW
☐ B-3	PRE-SLAB	☐ P-3	BUILDING SEWER (YARD LINES)	☐ X-4	SPRINKLER SYSTEM HYDRO
☐ B-4	ROOF SHEATHING	☐ P-4	UNDERSLAB PLUMBING	☐ X-5	FIRE ALARM
☐ B-5	FRAMING	☐ P-5	TOP OUT-WATER, GAS, WASTE	☐ X-6	OTHER
☐ B-6	INSULATION	☐ P-6	FINAL GAS TEST	☐ X-7	FINAL FIRE
☒ B-7	DRYWALL NAILING	☐ P-7	FINAL PLUMBING		
☐ B-8	EXTERIOR LATH/STUCCO			☐ E-1	UNDERGROUND ELECTRICAL
☐ B-9	WALL GROUT & STEEL	☐ M-1	ROUGH VENT	☐ E-2	ROUGH ELECTRICAL
☐ B-10	POOL PRE-GUNITE	☐ M-2	HOOD	☐ E-3	LOW VOLTAGE ELECTRICAL
☐ B-11	POOL PRE-PLASTER / FINAL	☐ M-3	FINAL MECHANICAL	☐ E-4	SIGN INSPECTION
☐ B-12	BUILDING FINAL			☐ E-5	FINAL ELECTRICAL
☐ B-13	CERT OF OCC	☐ X-1	KICKER / FLUSH	☐ E-6	TEMP POWER

☐ **FINAL INSPECTION**

BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS
SIGNED OFF TO BLDG & SAFETY FOR C of O ISSUANCE (Commercial Only)

FOR ASSISTANCE -CALL: 393-8251

DEPARTMENT OF BUILDING & SAFETY CITY OF LAS VEGAS

[illegible]

FOR ASSISTANCE -CALL: 386-6251

DEPARTMENT OF BUILDING & SAFETY CITY OF LAS VEGAS

60226

JOB ADDRESS 9412 Eagle Valley			PERMIT NO 91479
LOT NO 149	MAP NO 98	INSPECTOR 85	DATE 2-8-91
SUBDIVISION NAME Sun City			PHONE 4102
INSPECTOR SIGNATURE [Signature]			INSPECTION DATE 2-8-91

☐ PARTIAL INSPECTION - DESCRIPTION:

☒ **APPROVED**
☐ **PERMIT REQUIRED**
☐ **STOP WORK**

☐ **REJECTED - CORRECTION NOTICE - REINSPECTION REQUIRED CALL 799-2071**

INSPECT	DESCRIPTION	INSPECT	DESCRIPTION	INSPECT	DESCRIPTION
☐ B-1	FOOTING, LAYOUT, REBAR, ZONING	☐ P-1	ON SITE SEWER	☐ X-2	UNDERGROUND HYDRO
☐ B-2	STEM WALL - FORMS & REBAR	☐ P-2	ON SITE WATER	☐ X-3	UNDERGROUND FINAL/FLOW
☐ B-3	PRE-SLAB	☐ P-3	BUILDING SEWER (YARD LINES)	☐ X-4	SPRINKLER SYSTEM HYDRO
☐ B-4	ROOF SHEATHING	☐ P-4	UNDERSLAB PLUMBING	☐ X-5	FIRE ALARM
☐ B-5	FRAMING	☐ P-5	TOP OUT-WATER, GAS, WASTE	☐ X-6	OTHER
☐ B-6	INSULATION	☐ P-6	FINAL GAS TEST	☐ X-7	FINAL FIRE
☐ B-7	DRYWALL NAILING	☐ P-7	FINAL PLUMBING		
☐ B-8	EXTERIOR LATH/STUCCO			☐ E-1	UNDERGROUND ELECTRICAL
☐ B-9	WALL GROUT & STEEL	☐ M-1	ROUGH VENT	☒ E-2	ROUGH ELECTRICAL
☐ B-10	POOL PRE-GUNITE	☐ M-2	HOOD	☐ E-3	LOW VOLTAGE ELECTRICAL
☐ B-11	POOL PRE-PLASTER / FINAL	☐ M-3	FINAL MECHANICAL	☐ E-4	SIGN INSPECTION
☐ B-12	BUILDING FINAL			☐ E-5	FINAL ELECTRICAL
☐ B-13	CERT OF OCC.	☐ X-1	KICKER / FLUSH	☐ E-6	TEMP POWER

☐ **FINAL INSPECTION**

BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS
SIGNED OFF TO BLDG & SAFETY FOR C of O. ISSUANCE (Commercial Only)

FOR ASSISTANCE - CALL: 363-6251

EGAS
6026

FOR ASSISTANCE -CALL: 388-6251

DEPARTMENT OF BUILDING & SAFETY CITY OF LAS VEGAS

10-026

JOB ADDRESS 9412 Eagle Valley			PERMIT NO. 91479
LOT NO 149	MAP NO. 98	INSPECTOR 85	DATE 2-8-91
SUBDIVISION NAME Sun City 4102			PHONE
INSPECTOR SIGNATURE [Signature]			INSPECTION DATE 2-8-91

☐ PARTIAL INSPECTION - DESCRIPTION:

☒ **APPROVED**

☐ **PERMIT REQUIRED**

☐ **STOP WORK**

☐ **REJECTED - CORRECTION NOTICE - REINSPECTION REQUIRED CALL 799-2071**

INSPECT	DESCRIPTION	INSPECT	DESCRIPTION	INSPECT	DESCRIPTION
☐ B-1	FOOTING, LAYOUT, REBAR, ZONING	☐ P-1	ON SITE SEWER	☐ X-2	UNDERGROUND HYDRO
☐ B-2	STEM WALL — FORMS & REBAR	☐ P-2	ON SITE WATER	☐ X-3	UNDERGROUND FINAL/FLOW
☐ B-3	PRE-SLAB	☐ P-3	BUILDING SEWER (YARD LINES)	☐ X-4	SPRINKLER SYSTEM HYDRO
☐ B-4	ROOF SHEATHING	☐ P-4	UNDERSLAB PLUMBING	☐ X-5	FIRE ALARM
☐ B-5	FRAMING	☐ P-5	TOP OUT-WATER, GAS, WASTE	☐ X-6	OTHER
☐ B-6	INSULATION	☐ P-6	FINAL GAS TEST	☐ X-7	FINAL FIRE
☐ B-7	DRYWALL NAILING	☐ P-7	FINAL PLUMBING		
☐ B-8	EXTERIOR LATH/STUCCO			☐ E-1	UNDERGROUND ELECTRICAL
☐ B-9	WALL GROUT & STEEL	☒ M-1	ROUGH VENT	☐ E-2	ROUGH ELECTRICAL
☐ B-10	POOL PRE-GUNITE	☐ M-2	HOOD	☐ E-3	LOW VOLTAGE ELECTRICAL
☐ B-11	POOL PRE-PLASTER / FINAL	☐ M-3	FINAL MECHANICAL	☐ E-4	SIGN INSPECTION
☐ B-12	BUILDING FINAL			☐ E-5	FINAL ELECTRICAL
☐ B-13	CERT OF OCC	☐ X-1	KICKER / FLUSH	☐ E-6	TEMP POWER

☐ **FINAL INSPECTION**

BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS
SIGNED OFF TO BLDG & SAFETY FOR C. of O ISSUANCE (Commercial Only)

FOR ASSISTANCE -CALL: 393-0251

DEPARTMENT OF BUILDING & SAFETY CITY OF LAS VEGAS

6026

JOB ADDRESS 9412 Eagle Valley			PERMIT NO. 91479
LOT NO 149	MAP NO 98	INSPECTOR 85	DATE 2-8-91
SUBDIVISION NAME Sun City			PHONE 4102
INSPECTOR SIGNATURE [Signature]			INSPECTION DATE 2-8-91

☐ PARTIAL INSPECTION - DESCRIPTION:

☒ **APPROVED**

☐ **PERMIT REQUIRED**

☐ **STOP WORK**

☒ **REJECTED - CORRECTION NOTICE - REINSPECTION REQUIRED CALL 799-2071**

INSPECT	DESCRIPTION	INSPECT	DESCRIPTION	INSPECT	DESCRIPTION
☐ B-1	FOOTING, LAYOUT, REBAR, ZONING	☐ P-1	ON SITE SEWER	☐ X-2	UNDERGROUND HYDRO
☐ B-2	STEM WALL - FORMS & REBAR	☐ P-2	ON SITE WATER	☐ X-3	UNDERGROUND FINAL/FLOW
☐ B-3	PRE-SLAB	☐ P-3	BUILDING SEWER (YARD LINES)	☐ X-4	SPRINKLER SYSTEM HYDRO
☐ B-4	ROOF SHEATHING	☐ P-4	UNDERSLAB PLUMBING	☐ X-5	FIRE ALARM
☒ B-5	FRAMING	☐ P-5	TOP OUT-WATER, GAS, WASTE	☐ X-6	OTHER
☐ B-6	INSULATION	☐ P-6	FINAL GAS TEST	☐ X-7	FINAL FIRE
☐ B-7	DRYWALL, NAILING	☐ P-7	FINAL PLUMBING		
☐ B-8	EXTERIOR LATH/STUCCO			☐ E-1	UNDERGROUND ELECTRICAL
☐ B-9	WALL GROUT & STEEL	☐ M-1	ROUGH VENT	☐ E-2	ROUGH ELECTRICAL
☐ B-10	POOL PRE-GUNITE	☐ M-2	HOOD	☐ E-3	LOW VOLTAGE ELECTRICAL
☐ B-11	POOL PRE-PLASTER / FINAL	☐ M-3	FINAL MECHANICAL	☐ E-4	SIGN INSPECTION
☐ B-12	BUILDING FINAL			☐ E-5	FINAL ELECTRICAL
☐ B-13	CERT. OF OCC	☐ X-1	KICKER / FLUSH	☐ E-6	TEMP POWER

☐ **FINAL INSPECTION**

BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS
SIGNED OFF TO BLDG & SAFETY FOR C. of O ISSUANCE (Commercial Only)

FOR ASSISTANCE -CALL: 386-6251

DEPARTMENT OF BUILDING & SAFETY CITY OF LAS VEGAS

16026

JOB ADDRESS 9412 Eagle Valley			PERMIT NO. 91479
LOT NO 149	MAP NO 98	INSPECTOR 85	DATE 1-29-91
SUBDIVISION NAME Sun City 4102			PHONE
INSPECTOR SIGNATURE [Signature]			INSPECTION DATE 12991

CK LOOSE ABS

☐ PARTIAL INSPECTION - DESCRIPTION:

☒ **APPROVED**
☐ **PERMIT REQUIRED**
☐ **STOP WORK**

☒ **REJECTED - CORRECTION NOTICE - REINSPECTION REQUIRED CALL 799-2071**

INSPECT	DESCRIPTION	INSPECT	DESCRIPTION	INSPECT	DESCRIPTION
☐ B-1	FOOTING, LAYOUT, REBAR, ZONING	☐ P-1	ON SITE SEWER	☐ X-2	UNDERGROUND HYDRO
☐ B-2	STEM WALL — FORMS & REBAR	☐ P-2	ON SITE WATER	☐ X-3	UNDERGROUND FINAL/FLOW
☐ B-3	PRE-SLAB	☐ P-3	BUILDING SEWER (YARD LINES)	☐ X-4	SPRINKLER SYSTEM HYDRO
☒ B-4	ROOF SHEATHING	☐ P-4	UNDERSLAB PLUMBING	☐ X-5	FIRE ALARM
☐ B-5	FRAMING	☐ P-5	TOP OUT-WATER, GAS, WASTE	☐ X-6	OTHER
☐ B-6	INSULATION	☐ P-6	FINAL GAS TEST	☐ X-7	FINAL FIRE
☐ B-7	DRYWALL NAILING	☐ P-7	FINAL PLUMBING		
☐ B-8	EXTERIOR LATH/STUCCO			☐ E-1	UNDERGROUND ELECTRICAL
☐ B-9	WALL GROUT & STEEL	☐ M-1	ROUGH VENT	☐ E-2	ROUGH ELECTRICAL
☐ B-10	☐ POOL PRE-GUNITE	☐ M-2	HOOD	☐ E-3	LOW VOLTAGE ELECTRICAL
☐ B-11	☐ POOL PRE-PLASTER / FINAL	☐ M-3	FINAL MECHANICAL	☐ E-4	SIGN INSPECTION
☐ B-12	BUILDING FINAL			☐ E-5	FINAL ELECTRICAL
☐ B-13	CERT. OF OCC	☐ X-1	KICKER / FLUSH	☐ E-6	TEMP POWER

☐ **FINAL INSPECTION**

BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS
SIGNED OFF TO BLDG & SAFETY FOR C. of O ISSUANCE (Commercial Only)

FOR ASSISTANCE -CALL: 363-8251

VEGAS
6.026

[illegible]

☒ APPROVED ☐ PERMIT REQUIRED ☐ STOP WORK

REJECTED - CORRECTION NOTICE - REINSPECTION REQUIRED CALL 799-2071

☐ FINAL INSPECTION	BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS SIGNED OFF TO BLDG & SAFETY FOR C of O. ISSUANCE (Commercial Only)
--	--

FOR ASSISTANCE -CALL: 386-6251

DEPARTMENT OF BUILDING & SAFETY CITY OF LAS VEGAS

☐ PERMIT NUMBER 91479		INSPECTION NUMBER 440		6026
JOB ADDRESS 9412 Eagle Valley				
LOT NO 149	BLOCK NO. 98	SUBDIVISION NAME Sun City		
FIRE DEPT MAP NO	JOB PHONE	CALL-IN DATE	CALL-IN TIME	SCHEDULE DATE 4-18-91
INSPECTOR NO 23	INSPECTOR NAME 			

INSPECTION REQUESTED	final plumbing
-----------------------------	----------------

☐ PARTIAL INSPECTION	☐ PARTIAL APPROVAL (P)	PARTIAL DESCRIPTION		
☒ APPROVED (A)	☐ STOP WORK (S)	☐ COMMENTS (C)	☐ TEMPORARY APPROVAL (T) - UNTIL	☐ HOLD (H)
☐ REJECTED (R)	REINSPECTION REQUIRED - CALL 799-2071			☐ PERMIT REQUIRED
☐ REFEE (F)	REINSPECTION FEE REQUIRED - PAY AT CITY HALL 3RD FLOOR - 400 E. STEWART STREET.			

INSPECTOR SIGNATURE		INSPECTION DATE 4/18/91
----------------------------	--	--------------------------------

☐ PROJECT COMPLETE	BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS SIGNED OFF TO BLDG & SAFETY FOR C. of O. ISSUANCE (Commercial Only)
--	---

IF YOU HAVE ANY QUESTIONS ON THIS INSPECTION, YOU MAY CALL THE INSPECTOR FROM 7:00 A.M. - 7:15 A.M. OR 2:45 P.M. - 3:00 P.M. AT	
---	--

FOR ADDITIONAL ASSISTANCE CALL 386-6251
SEE REVERSE SIDE FOR INSPECTION TYPES

DEPARTMENT OF BUILDING & SAFETY CITY OF LAS VEGAS

JOB ADDRESS 9412 Eagle Valley			PERMIT NO 91479
LOT NO 149	MAP NO 98	INSPECTOR 85	DATE 12-27-90
SUBDIVISION NAME Sun City 4102			PHONE
INSPECTOR SIGNATURE FZ			INSPECTION DATE 12-27-90

☐ PARTIAL INSPECTION - DESCRIPTION:

☒ **APPROVED**
☐ **PERMIT REQUIRED**
☐ **STOP WORK**

☐ **REJECTED - CORRECTION NOTICE - REINSPECTION REQUIRED CALL 799-2071**

INSPECT	DESCRIPTION	INSPECT	DESCRIPTION	INSPECT	DESCRIPTION
☐ B-1	FOOTING, LAYOUT, REBAR, ZONING	☐ P-1	ON SITE SEWER	☐ X-2	UNDERGROUND HYDRO
☐ B-2	STEM WALL - FORMS & REBAR	☐ P-2	ON SITE WATER	☐ X-3	UNDERGROUND FINAL/FLOW
☐ B-3	PRE-SLAB	☒ P-3	BUILDING SEWER (YARD LINES)	☐ X-4	SPRINKLER SYSTEM HYDRO
☐ B-4	ROOF SHEATHING	☒ P-4	UNDERSLAB PLUMBING	☐ X-5	FIRE ALARM
☐ B-5	FRAMING	☐ P-5	TOP OUT-WATER, GAS, WASTE	☐ X-6	OTHER
☐ B-6	INSULATION	☐ P-6	FINAL GAS TEST	☐ X-7	FINAL FIRE
☐ B-7	DRYWALL NAILING	☐ P-7	FINAL PLUMBING		
☐ B-8	EXTERIOR LATH/STUCCO			☐ E-1	UNDERGROUND ELECTRICAL
☐ B-9	WALL GROUT & STEEL	☐ M-1	ROUGH VENT	☐ E-2	ROUGH ELECTRICAL
☐ B-10	POOL PRE-GUNITE	☐ M-2	HOOD	☐ E-3	LOW VOLTAGE ELECTRICAL
☐ B-11	POOL PRE-PLASTER / FINAL	☐ M-3	FINAL MECHANICAL	☐ E-4	SIGN INSPECTION
☐ B-12	BUILDING FINAL			☐ E-5	FINAL ELECTRICAL
☐ B-13	CERT OF OCC.	☐ X-1	KICKER / FLUSH	☐ E-6	TEMP POWER

☐ **FINAL INSPECTION**

BRING HARD CARD WITH FIRE, QUALITY CONTROL & PLANNING APPROVALS
SIGNED OFF TO BLDG & SAFETY FOR C. of O. ISSUANCE (Commercial Only)

FOR ASSISTANCE -CALL: 382-6251

HIGHLAND**PRODUCTS
INC.**3650 North 40th Avenue
Phoenix, Arizona 85019

(602) 272-1575 • (602) 269-2561

90-091479

THE INFORMATION BELOW TO BE SUPPLIED BY APPLICATOR

LOCATION 9412 Eagle Valley DATE 3-8-91APPLICATOR Nevada State Plastering INSPECTED _____NAME Del Webb PHONE # 649 8622

BUILDER _____

APPLICATOR'S # 196 LOT # 98

I hereby state that the stucco installation on this project is per manufacturer's specification and conforms to the local building requirements.

CONTRACTOR Ken Frost

One copy to builder and one copy to building department in authority.
Any misuse of this card shall invalidate any warranty, implied or otherwise. Verification of this card must be obtained by calling Highland Products, Inc., 269-2561.

The following is a COPY ONLY, not to be misconstrued as an actual warranty by Highland Products, Inc.

Highland Products, Inc. warrants the Wire-Tex Stucco System for twenty (20) years from the date of the initial application to be free from any defects which seriously affect the weather resistance of the system. Should any defects occur, Highland Products, Inc. shall make a pro-rate allowance for replacement, or pay the owner the amount of the allowance. Highland Products, Inc. shall not be liable for damages or defects resulting from misuse, natural catastrophies, casualty or other cause beyond the control of Highland Products, Inc.

This warranty does not relieve the builder of his responsibilities under the Builder's Warranty required by the National Housing Act or under any provisions applicable to special housing programs such as Low Rent Public Housing.

The above warranty applies to HUB bulleting #1074.

CITY OF LAS VEGAS, NEVADA

DEPARTMENT OF BUILDING AND SAFETY
PHONE 386-6251

LOG NO. & AREA

ADDRESS OF
CONSTRUCTION 9412 Eagle Valley Drive

OWNER

Del Webb

PHONE 732-2545

CONTRACTOR Quality Mechanical, Inc.

STATE
LICENSE NO

10867A

CITY
LICENSE NO.

C11766-200577

LOT(s) 149

BLOCK

SUBDIVISION Sun City Prod. 98-135

ZONE:

PROPOSED CONSTRUCTION 1-3.0 ton, 2 bath fans, 1 kitchen hood

USE

UNITS	DESCRIPTION	FEE	TOTAL
PERMIT ISSUANCE			
1	For the issuance of each permit	15 00	15.00
	For issuing each supplemental permit	4 50	
UNIT FEE SCHEDULE			
	For the installation or relocation of each forced-air or gravity-type furnace or burner, including ducts and vents attached to such appliance, up to and including 100,000 Btu/h	9 00	
	For the installation or relocation of each forced-air or gravity-type furnace or burner, including ducts and vents attached to such appliance over 100,000 Btu/h	11.00	
	For the installation or relocation of each floor furnace, including vent	9 00	
	For the installation or relocation of each suspended heater, recessed wall heater or floor-mounted unit heater.	9.00	
	For the installation, relocation or replacement of each appliance vent installed and not included in an appliance permit	4.50	
	For the repair of, alteration of, or addition to each heating appliance, refrigeration unit, cooling unit, absorption unit, or each heating, cooling absorption, or evaporative cooling system, including installation of controls regulated by this code	9 00	
1	For the installation or relocation of each boiler or compressor to and including three tons, or each absorption system to and including 100,000 Btu/h	9 00	9.00
	For the installation or relocation of each boiler or compressor over three tons to and including 15 tons, or each absorption system over 100,000 Btu/h and including 500,000 Btu/h.	16 50	
	For the installation or relocation of each boiler or compressor over 15 tons to and including 30 tons, or each absorption system over 500,000 Btu/h to and including 1,000,000 Btu/h	22.50	
	For the installation or relocation of each boiler or compressor over 30 tons to and including 50 tons, or for each absorption system over 1,000,000 Btu/h to and including 1,750,000 Btu/h	33 50	
	For the installation or relocation of each boiler or refrigeration compressor over 50 tons, or each absorption system over 1,750,000 Btu/h	56 00	

I hereby certify that I have carefully examined and read the above application; that the same is true and correct; and that the work herein described is to be done in accordance with all the provisions of the applicable Ordinances of the City of Las Vegas, Nevada and the State Laws, whether herein specified or not

SIGNED Karessa Jorda CONTRACTOR

MASTER CARD NO

BY

BUILDING DEPT

Spec Contr or Owner

DATE

PERMIT
FEETOTAL
FEES

31.05

2310-2435

RECEIPT

MUST BE MACHINE VALIDATED

PERMIT EXPIRES 180 DAYS AFTER ABANDONMENT OF WORK

CITY OF LAS VEGAS, NEVADA

DEPARTMENT OF BUILDING AND SAFETY
PHONE 386-6251

DERMIT NO.

90-093098

PLUMBING PERMIT

LOG NO. & AREA

1115

DATE

12/27/17

CONST. VAL. \$

ADDRESS OF

CONSTRUCTION 9412 Eagle Valley Drive

OWNER Del Webb

PHONE 876-5952

CONTRACTOR Cox & Sons Plumbing & Heating

STATE
LICENSE NO

7596A

CITY
LICENSE NO

10100

LOT(s) 149

BLOCK

SUBDIVISION

Sun City Summerlin

ZONE

PROPOSED CONSTRUCTION

SFD

USE

RES

PLUMBING

PERMIT NO

Approval for the work under this permit will be given only after refuse
and debris have been removed from job site and public right of way

UNITS	DESCRIPTION	FEE	TOTAL
PERMIT ISSUANCE			
1	For Issuing Each Permit	10 00	10.00
	For Issuing Each Supplemental Permit	4 50	
FIXTURE CHARGE			
6	Bathtub, Shower, Lavatory, Toilet, Urinal	EA 2 00	12.00
1	Floor Drain, Floor Sink, Wash Tray, Sink	EA 2 00	2.00
3	Garbage Disposal, Clothes Washer, Dishwasher (residential)	EA 2 00	6.00
	Garbage Disposal (commercial)	EA 8 00	
	Clothes Washer, Dishwasher (commercial)	EA 2 00	
	Clothes Dryer (gas) (venting)	2 00	
	Dental Unit	8 00	
	Drinking Fountain	2 00	
1	Refrigerator - Ice Maker, Water Dispenser	2 00	2.00
	Any other water using equipment, Attached Coffee Makers, Ice Makers	2 00	
1	Hot Water Heater (Gas or Electric)	EA 2 00	2.00
SEWER SYSTEM			
1	New, Replacement, Modification, or Any Drainage Work	10 00	10.00
	Grease or Sand Trap or Interceptor	2 00	
	Trailer Trap (rental parks)	5 00	
WATER SOFTENERS			
	Non Permanent Type (rental)	2 00	
	Permanent Type (connected to drain)	2 00	
WATER DISTRIBUTION SYSTEM			
1	Single Family Dwelling	6 00	6.00
	Multi-Family Dwelling	6 00	
	Plus Each Dwelling Unit	3 00	
	Commercial Building per floor	3 00	
	Plus Each Unit (leased space or office)	2 00	
	Hotel or Motel	8 00	
	Plus Each Unit	3 00	
	Trailer Park	30 00	
	Plus Each Space	2 00	
	Irrigation Single Family Dwelling	8 00	
	Irrigation Commercial Fee Based on Building Code Valuation Chart Construction Valuation		

UNITS	DESCRIPTION	FEE	TOTAL
FUEL PIPING SYSTEM			
1	Single Family Dwelling	6 00	6.00
	Multi-Family Dwelling	10 00	
	Plus Each Unit	2 00	
	Commercial Building (per floor)	6 00	
	Plus Each Unit (leased space or office)	6 00	
	Medium Pressure System (Plan Check)	12 00	
	Each Gas Appliance (Any Type)	2 00	
	Steam Boilers	5 00	
SOLAR ENERGY SYSTEMS			
	Collectors (including piping) (per collector)	5 00	
	Storage Tanks (each)	5 00	
PIPELINE CONTRACT			
	For Onsite Sewer, Gas or Water Contract Value Fee based on Building Code Permit Valuation Chart		
OTHER INSPECTIONS AND FEES:			
	Inspections outside of normal business hours (minimum charge—three hours)	25 00 per hour	
	Under provisions of Table 3-A of the Uniform Building Code, work which has been inspected once and not approved may be subject to a Reinspection Fee not less than \$30 00 per each inspection during business hours	30 00 each	
	Additional plan review required by changes Additions to or revisions to approved plans (minimum charge two hours)	30 00 per hour	
	Plumbing permit fees may be computed the same as building permit fees by using the cost of installation for valuation amount when such work is not included in the above schedule		
	Construction Valuation		

FOR INSPECTIONS
CALL 799-2071SEWER # 7114-3654
CONNECTION

RECEIPT

FIXTURES X

FEE \$56.00

2310-2403

PERMIT
FEETOTAL
FEES \$56.00

PERMIT NO

MUST BE MACHINE VALIDATED

I hereby certify that I have carefully examined and read the above application, that the same is true and correct, and that the work herein described is to be done in accordance with all the provisions of the applicable Ordinances of the City of Las Vegas, Nevada and the State Laws, whether herein specified or not

SIGNED

CONTRACTOR

MASTER CARD NO

197

Kenneth Cox

BY

Registered Master Plumber Spec Cont r or Owner

BUILDING DEPT

DATE

DEPARTMENT OF BUILDING AND SAFETY
PHONE 386-6251

FOR INFO



ELECTRICAL PERMIT

LOG NO. & AREA

DATE

CONST. VAL. \$

ADDRESS OF
CONSTRUCTION

9412 Eagle Valley Dr

OWNER

Del Webb

CONTRACTOR

Secura Electric

STATE

LICENSE NO.

0024610

CITY

LICENSE NO.

031296

JOHN SYLVIA

0063

PHONE 798-8651

(PRINT NAME OF MASTER ELECTRICIAN)

MASTER CARD NO

PROPOSED CONSTRUCTION.

USE

ELECTRIC

PERMIT NO.

Approval for the work under this permit will be given only after refuse
and debris have been removed from job site and public right of way.

UNITS	DESCRIPTION	FEE	TOTAL
PERMIT ISSUANCE			
1	For Issuing Each Permit	10 00	10.00
	Supplemental Fee	4.50	
APPLIANCE CHARGE			
Residential or General Commercial			
52	Receptacle 35 Switch 17	40	20.80
18	Each Light Fixture, Socket, or Exit Light, Smoke Detector or Exhaust Fan	.30	5.40
6	Each OUTLET FOR SPECIAL PURPOSE: Dishwasher, Garbage Grinder, Trash Compactor, G.F.I., Clothes Washer, Dryer, Electric Range, Ovens, Water Heater, Space Heater, Blast Coil Heater, (PER KW), Mercury Lamp, Quartz Lamp, Sodium Lamp, 20AMP Sign Circuit	70	4.20
	X-Ray Unit	10 00	
	Area Lighting (First 3,000 Watts)	8 00	
	Each Additional 1,000 Watts	3 00	
MOTORS (1 H.P. AND OVER) TRANSFORMERS, ELEVATORS, WELDERS, GENERATORS, CHILLERS, SIGNS AND A/C UNITS (OVER 5 TONS)			
	First H.P. or Ton For each Unit	3 00	
	First KVA For Each Unit	3 00	
	Each Additional H.P., Ton or KVA up to 50	50	
	Each Additional H.P., Ton or KVA over 50	.35	
	Temporary power or Pole	6 00	
ELECTRIC SERVICE OR MAIN DISCONNECT			
1	Up to 200 AMP	6 00	6.00
	400 AMP And 600 AMP	12 50	
	Over 600 AMP To 1200 AMP	25 00	
	Over 1200 AMP	50 00	
	Each Additional Meter Socket	.50	
	Sub Panel, Motor Control Center Disconnect Switch, Transfer Switch (Each)	3 00	
	Swimming Pool (Residential)	20.00	
	Swimming Pool (Semi-Public)	30.00	
	Spas	8.00	
	Recreational Vehicle Spaces (Each)	3.00	

UNITS	DESCRIPTION	FEE	TOTAL
	Busways-Trolley or Plug-in (Ea 100 Ft)	3.00	
	Gas Pumps, Dispensers (Each)	3.00	
1	Permanent A/C Unit (5 Tons or Less)	3.00	3.00
1	Each Air Handler	1 00	1.00
RESIDENTIAL LOW VOLTAGE INSTALLATIONS			
	Speaker Outlets (Each)	30	
	Signal or Alarm Outlets (Each)	30	
	Amplifiers	2 00	
	Control Panel	50	
2	TV Master System	30	1.60
2	Telephone or Computer Outlet	30	1.60
OTHER INSPECTIONS AND FEES: INCLUDES ISSUANCE FEES WHEN APPLICABLE			
	Inspections outside of normal business hours (minimum charge — three hours)	30 00 per hour	
	Reinspection fee assessed under provisions of TABLE 3-A of the Uniform Building Code = \$30 00 EACH	30 00 each	
	Inspections for which no fee is specifically indicated (minimum charge — one-half hour)	30 00 per hour	
	Additional plan review required by changes, additions or revisions to approved plans (minimum charge — one-half hour) After work hours — \$30 00 per hour — minimum 1 hour	30 00 per hour	
	Starter Permit	50 00	
CONTRACT PRICE OR COST OF INSTALLATION			
	Commercial — Burglar Alarms		
	— Music Systems		
	— Data Processing		
	— Communication		
	Conduit Only—Contract Price		
	All Misc. Electric		

Electrical permit fees may be computed
the same as building permit fees by
using the cost of installation for valuation
amount when such work is not included
in the above schedule

2310-2432

RECEIPT

I hereby certify that I have carefully examined and read the above application, that the
same is true and correct, and that the work herein described is to be done in accordance
with all the provisions of the applicable Ordinances of the City of Las Vegas, Nevada and
the State Laws, whether herein specified or not

SIGNED HOMEOWNER, CONTRACTOR

PERMIT
FEE

51.60

LESS
STARTER PERMIT.TOTAL
FEES

51.60

PERMIT NO.

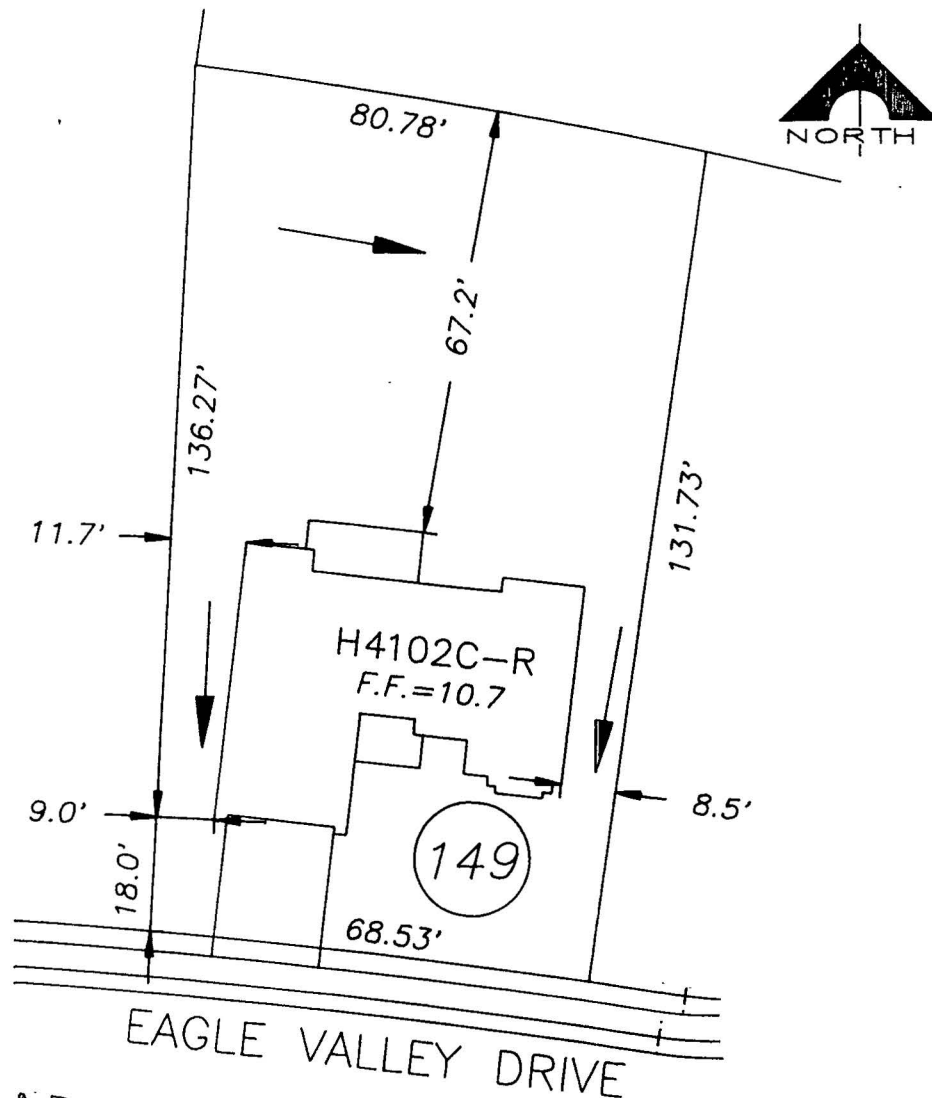
MUST BE MACHINE VALIDATED

BUILDING DEPT

DATE

Permit Expires 180 Days After Abandonment of Work

9412 Eagle Valley 90-091479



APPROVED

By *[Signature]* 12/6/90

THIS PLOT PLAN IS TENTATIVE,
AND SUBJECT TO CHANGE
PENDING FINAL GOVERNMENTAL
APPROVAL.

PLOT PLAN

SCALE: 1" = 30'

ACCORDANCE WITH
CONSTRUCTION
SEQUENCE SCHEDULE
DATED 12/13/90

CONSULT THE RECORDED
SUBDIVISION PLAT FOR
ACCURATE LOT SIZE AND
BOUNDRY INFORMATION.

SUN CITY LAS VEGAS, NEVADA

UNIT #22

LOT 149 PLAN H4102C ADDRESS

9412 Eagle Valley Drive

DEL E. WEBB COMMUNITIES

CITY OF LAS VEGAS, NEVADA

PERMIT NO.

90-091479

DEPARTMENT OF BUILDING AND SAFETY
PHONE 386-6251

FO



17250

BUILDING PERMIT

FOR: Single Family Dwelling, Remodel
Additions, Misc. Residential Construction

LOG NO. & AREA T-115 DATE 12/4/90 CONST. VAL. \$ 38,300.00

ADDRESS OF CONSTRUCTION 9412 Eagle Valley Drive OWNER Del Webb Corporation PHONE 363-2111

LOT(s) 149 BLOCK 1 SUBDIVISION Sun City Summerlin #22 ZONE P.C.

PROPOSED CONSTRUCTION S.F.D. W/FP. USE Residential

THIS PERMIT FOR BLDG ☒ A/C ☐ ELEC. ☐ PLBG ☐ OTHER PERMITS REQD. FENCE ☐ OFF SITE ☐ SWIM POOL ☐

FLOOR AREA BSMT N/A 1ST 1195 2ND N/A GARAGE 515 PORCH 139 TOTAL 1849

CONTRACTOR Del Webb Corporation STATE LICENSE NO 0026603 CITY LICENSE NO C11-02622-2036077

ARCHITECT Walter J. Richardson ENGINEER G.C. Wallace

MASTER PLUMBER/CONTRACTOR Cox Plumbing MASTER ELECTRICIAN/CONTRACTOR Secura Electric

OTHER INSPECTIONS AND FEES



- 1 Inspections outside of normal business hours = \$30.00 per hour (minimum charge three hours)
- 2 Re-inspection fee during normal business hours assessed under provisions of TABLE 3-A of the Uniform Building Code = \$30.00 per hour
- 3 Inspections during normal business hours for which no fee is specifically indicated = \$30.00 per hour (minimum charge one half hour)
- 4 Additional plan review required by changes, additions, or revisions to approved plans = \$30.00 per hour (minimum charge two hours)

CONDITIONS OF THE PERMIT:

- 1 I agree to call the City Building Department for inspections before concrete is poured, before rough wiring, electrical, plumbing, framing is covered. Also for air conditioning, drywall and sheathing inspection
- 2 I agree that when the job is completed that I will call for final inspection before occupancy
- 3 I agree to perform all construction in accordance with City Ordinances and Building Codes
- 4 The Contractor's signature below denotes authority from the owner to sign in his behalf and that the owner is aware of all requirements of this application and permit. Separate permits must be taken out for work outlined above this agreement
- 5 I have read and understand the contents of this application and permit, I hereby state that the information I have supplied on this application is true and correct
- 6 Approval for the work under this permit will be given only after refuse and debris have been removed from job site and public right of way.
- 7 24 HOUR MINIMUM NOTICE REQUIRED FOR INSPECTIONS

SPECIAL CONDITIONS

H4102C

BY  I HEREBY DECLARE THAT I AM THE LEGAL OWNER OF THE ABOVE PROPERTY OWNERBY  AGENT

I hereby certify that I have reviewed this application and the proposed plans and have found that the proposed development meets the requirements of the City of Las Vegas Flood Hazard Reduction Ordinance for the issuance of this Development Permit.

LAND DEVELOPMENT AND FLOOD CONTROL ENGINEER

PLANNING DEPT

BUILDING DEPT

12/6/90 DATE

12/6/90 DATE

12/5/90 DATE

RECEIPT

PLUMBING		FEE	ELECTRICAL		FEE
WATER DISTRIBUTION	6 00		RECEPTACLE _____ SWITCH _____	.40	
SEWER SYSTEM - NEW OR MODIFICATION	10 00		EACH LIGHT FIXTURE OR SOCKET _____	30	
FIXTURES - WATER SOFTENER, HW HEATER	2.00		SPECIAL OUTLET, APPLIANCE ETC	70	
GARBAGE DISPOSAL - WASHER	2 00		SERVICE/PANEL - SUB/3 00- 200A/6 00- 400A/12.50		
FUEL PIPING	6 00		A C UNIT OR MOTORS	3 00	
IRRIGATION SYSTEM	8 00		2310 - 2432	TOTAL	
MISC.			MISC		
2310 - 2433		TOTAL			
AIR CONDITIONING		FEE	2310 - 2431 ISSUANCE FEE	625.00	
NEW UNIT - 3 TON = 9 00 OVER = 16 50			7143 - 2973 SEWER CONNECTION		
FURNACE TO 100,000/9 00 OVER/11 00			2310 - 2431 PLAN REVIEW FEE	281.00	
VAPORATIVE COOLER	6 50		2310 - 2431 BLDG PERMIT. FEE	906.00	
VENTILATION FAN	2 35		TOTAL FEES		
2310 - 2435		TOTAL			

PERMIT NO _____
MUST BE MACHINE VALIDATED

Permit Expires 180 Days After Abandonment of Work