

**Builders
Insulation Statement**

8232 TIVOLI COVE DR



Am West - Estates Ret 145 - Ph 7 - Plan 602A

InsulSafe III®

Insul-Safe III® has been installed with the manufacturer's recommendations to provide a value of R 30 using 30 bags of insulation to cover 1300 square feet of area at a minimum thickness of 1 1/2 inches.

Herb Gupertoy
Insulation Contractor (Sign)

Insulators Inc
Company Name

1-16-98

Date

Builder (Sign)

Company Name

Date

Batts and Blanket

R* Value	Insulation Thickness
R-38	12"
R-30	10"
R-22	6 1/2"
R-19	6 1/4"
R-13	3 1/2"
R-11	3 1/2"

Meets ASTM C 665, replacing Federal Specification HH-I-521F.

Fiber glass batts or rolls have been installed in accordance with the manufacturer's recommendation to provide an R-value of _____ in the ceiling, _____ in the exterior walls, _____ in the floor or crawl space perimeter.

Insulation Contractor (Sign)

Company Name

Date

Builder (Sign)

Company Name

Date

Thermal Performance — Attic Blowing Application

- In accordance with the chart below, you must install the minimum number of bags per 1,000 sq. ft. of net area for each R-Value listed.
- The maximum net coverage must not exceed that specified for each R-Value.
- The installed insulation must be at or above the specified minimum thickness for each R-Value.
- Failure to install the required minimum weight per sq. ft. of insulation at or above the minimum thickness will result in reduced R-Value.
- This product should not be mixed with other blown insulations or the thermal claims will become invalid.

"R" means resistance to heat flow. The higher the R-Value, the greater the insulation power. To get the marked R-Value, it is essential that this insulation be installed properly. If you do-it-yourself, get instructions and follow them carefully. Instructions do not come with this package.

CAUTION: RECESSED LIGHT FIXTURES—TO PREVENT OVERHEATING, DO NOT INSULATE ON TOP OR WITHIN 3" OF SUCH DEVICES. DOES NOT APPLY TO TYPE IC LIGHT FIXTURES OR TO FLUORESCENT FIXTURES WITH THERMALLY PROTECTED BALLASTS.

R-VALUE	BAGS PER 1000 SQ. FT.	MAXIMUM SQ. FT. PER BAG	MINIMUM WEIGHT POUNDS PER SQ. FT.	MINIMUM THICKNESS
To obtain a thermal resistance (R) of:	Bags per 1000 sq. ft. of net area:	Contents of bag should not cover more than: (sq. ft.)	Weight per sq. ft. of installed insulation should not be less than: (lbs.)	Should not be less than: (inches)
R-49	34.3	29	.858	19 1/4"
R-44	31.1	32	.778	17 3/4"
R-38	26.6	38	.665	15 1/2"
R-30	20.8	48	.521	12 1/2"
R-26	18.1	55	.452	11"
R-22	15.0	67	.374	9 1/4"
R-19	13.2	76	.330	8 1/4"
R-13	9.0	111	.225	5 3/4"
R-11	7.4	136	.184	4 3/4"

R-Values are determined in accordance with ASTM C 687 and C 518. Conforms to ASTM C 764 which replaces Federal Specification HH-I-1030B.

Framing Adjustment

To compensate for framing members the number of bags per 1000 sq. ft. of net area should be reduced as follows:

Joist Size	Bags to Deduct / 1000 sq. ft. Joists 16" O.C.	Bags to Deduct / 1000 sq. ft. Joists 24" O.C.
2" x 4"	.7	.5
2" x 6"	1.0	.7
2" x 8"	1.3	.9
2" x 10"	1.6	1.0

CertainTeed Corporation
P.O. Box 860, Valley Forge, PA 19482

AMERICAN WEST DEVELOPMENT, INC.
 ESTATES AT SOUTHSORE UNIT 1 PHASE 7
 SEQUENCE OF CONSTRUCTION

SEQ.	LOT	BLOCK	PLAN	OPTIONAL FIREPLACE	ADDRESS
1	164	5	601C	- MBR	8241 Tivoli Cove Drive
2	163	5	602CR	- MBR	8237 Tivoli Cove Drive
3	162	5	602B	LR MBR	8233 Tivoli Cove Drive
4	161	5	604AR	- -	8229 Tivoli Cove Drive
5	160	5	601C	- -	8225 Tivoli Cove Drive
6	159	5	603AR	LR MBR	8221 Tivoli Cove Drive
7	158	5	602B	- MBR	8217 Tivoli Cove Drive
8	157	5	604AR	- -	8213 Tivoli Cove Drive
9	156	5	602C	- -	8209 Tivoli Cove Drive
10	155	5	604BR	LR -	8205 Tivoli Cove Drive
11	154	5	604A	LR -	8201 Tivoli Cove Drive
12	143	4	603AR	LR -	8240 Tivoli Cove Drive
13	144	4	602B	- -	8236 Tivoli Cove Drive
14	145	4	601CR	- -	8232 Tivoli Cove Drive
15	146	4	602B	- -	8228 Tivoli Cove Drive
16	147	4	604AR	PLYRM	8224 Tivoli Cove Drive
17	148	4	602C	- -	8220 Tivoli Cove Drive
18	149	4	603BR	- MBR	8216 Tivoli Cove Drive
19	150	4	601C	- -	8212 Tivoli Cove Drive
20	151	4	602BR	- MBR	8208 Tivoli Cove Drive
21	152	4	602C	- -	8204 Tivoli Cove Drive
22	153	4	602BR	LR MBR	8200 Tivoli Cove Drive

9/4/90

✓

9/5/90

BREAKDOWN:

PLAN 601	A - 0	PLAN 602	A - 0	PLAN 603	A - 2
	B - 0		B - 6		B - 1
	C - 4		C - 4		C - 0
	---		---		---
	4		10		3

PLAN 603	AA - 0	PLAN 604	A - 4
	BB - 0		B - 1
	CC - 0		C - 0
	---		---
	0		5

TOTAL: 22 HOUSES
 PER PLOT PLAN DATED:

AMERICAN WEST DEVELOPMENT, INC.
 THE ESTATES AT SOUTH SHORE

UNIT 1 PHASE 7

LEGEND

LOT#





BLOCK#



PLAN#

ELEVATION

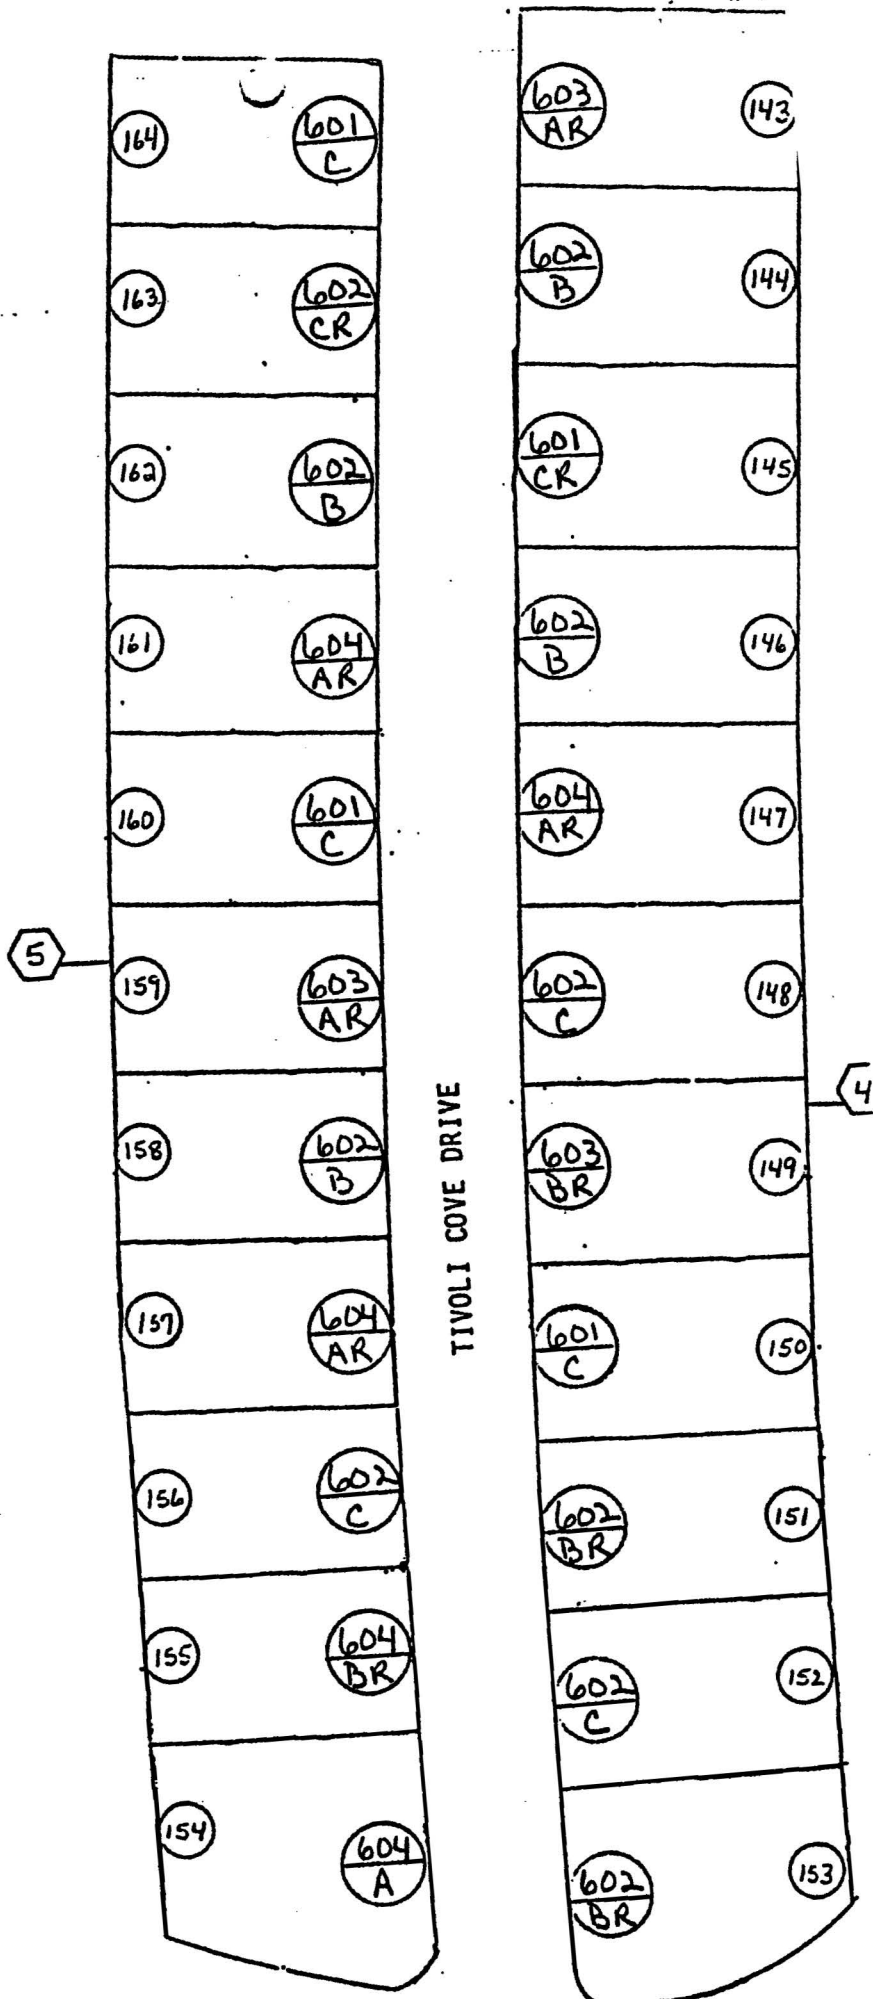

BRIGHTON SHORE STREET

