


KEY MAP
NTS

PLANT SCHEDULE

TREES, EXISTING TREES, SHRUBS & GROUNDCOVERS				
SYMBOL	BOTANICAL NAME	COMMON NAME	QTY.	SIZE
	QV - Quercus virginiana	Southern Live Oak	49	36" BOX
	PD - Phoenix dactylifera	Phoenix Date Palm	17	36" ROOT BALL 25' HEIGHT
	XT - EXISTING TREE			
	XP - EXISTING PALM TREE			
	CN - Cassia nemophila	Desert Cassia	137	5 GAL
	CD - Cotoneaster dammeri 'Coral Beauty'	Coral Beauty Cotoneaster	122	5 GAL
	AR - Acacia redolens 'Desert Carpet'	Desert Carpet	52	5 GAL
	CO - Convolvulus cneorum	Bush Morning Glory	35	5 GAL
	LS - Lantana camara 'New Gold'	New Gold Lantana	47	5 GAL

NOTES

- CONTRACTOR IS RESPONSIBLE TO VERIFY ALL PLANT QUANTITIES. THE PLANT SCHEDULE IS INTENDED AS A REFERENCE ONLY.
 - LANDSCAPE ARCHITECT IS TO APPROVE ALL PLANT MATERIAL PRIOR TO INSTALLATION WITH A 48 HOUR ADVANCED NOTICE.
 - PLANT MATERIAL IS TO HAVE IDENTIFICATION TAGS ON 10% OF THE TOTAL QUANTITY OF EACH SPECIES, SHOWING GENUS, SPECIES, VARIETY, ETC.
 - CONTRACTOR TO PROVIDE MATCHING SIZES AND FORMS OF LIKE SHRUB SPECIES AS SHOWN ON DRAWINGS.
 - DECOMPOSED GRANITE, 1/2" MINUS, COLOR: "PINK CORAL", 2" DEPTH TYPICAL IN ALL PLANTING BEDS. DECOMPOSED GRANITE SHALL CONTAIN 60% AGGREGATE AND 40% FINES. CONTRACTOR TO RECEIVE VERIFICATION FROM ROCK SUPPLIER AND PRESENT VERIFICATION TO THE OWNER PRIOR TO ANY CONSTRUCTION.
- WHOLESALE DEALER:
 KALAMAZOO MATERIALS, INC.
 2251 SOUTH FORT APACHE ROAD, SUITE 2079
 LAS VEGAS, NV 89117
 TELEPHONE: (702) 296-9133
- 20% 4' LARGEST DIAMETER*
 40% 3' LARGEST DIAMETER
 40% 2' LARGEST DIAMETER
- TOTAL QUANTITY OF BOULDERS: 68
- * NOT TO BE USED IN AREAS LESS THAN 7'
- LANDSCAPE UPLIGHTING-
 INSTALL TRAILBLAZER LANDSCAPE LIGHT, PRODUCT CODE LT-24-12W-450-RD-VC-TW-LT6912GRS, OR APPROVED EQUAL

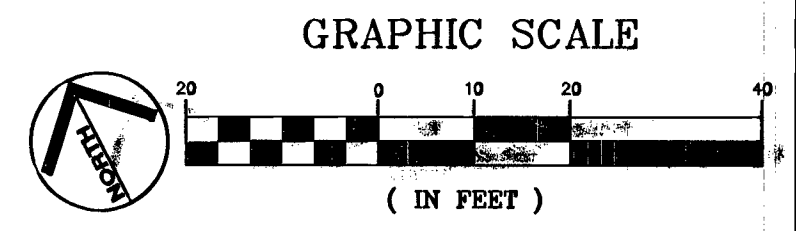

DEPARTMENT OF PUBLIC WORKS
 BONNEVILLE/CLARK
 ONEWAY COUPLER PHASE 1
 IMPROVEMENT PLANS
 LANDSCAPE SHEET

DATE: FEBRUARY 2010
 SHEET REPLACEMENT
 REVISIONS:

SCALE: N/A
 DESIGNED BY: DJC
 DRAWN BY: FR

DATE: FEBRUARY 2010
 CHECKED BY: ACP

Kimley-Horn
 and Associates, Inc.
 Engineering, Planning, and Environmental Consultants
 2080 E. Flamingo Road, Suite 210, Las Vegas, NV 89119
 PH: (702) 735-4949
 FAX: (702) 735-4949

REGISTERED LANDSCAPE ARCHITECT
 STATE OF NEVADA
 791
 Expires 6/30/11

SHEET NO.
 LA-04
 SHEET 76 OF 91
 DRAWING NO.
 107V5201

BID # 09.1730.37 REV 3

1245165
 1/15/2010 7:44am - USDT_david.connelly
 K:\PHX_Roadway\092-Las Vegas\08225601-Bonneville-Clark\LA01-07\2560198-01_07.dwg

811
 SAFETY ALERT
 Call Before You Dig
 Call before you dig
 Call before you dig
 1-702-432-5300