
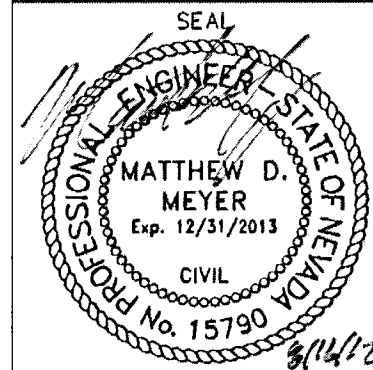


CONSTRUCTION ITEMS:

- 1 ADJUST WATER VALVE BOX TO FINISHED GRADE PER UDACS PLATE NO. 39. VALVE SHALL BE ACCESSIBLE AT ALL TIMES
- 2 CONTRACTOR SHALL INSTALL BLIND FLANGE, CONCRETE COLLAR, MANHOLE FRAME AND COVER AND ADJUST WATER BLOW-OFF ASSEMBLY TO FG PER UDACS PLATE NO. 37
- 3 ADJUST WATER MANHOLE TO FG PER LVVMD DESIGN STD. PLO8-4 (LVVMD ACAD STD)
- 4 ADJUST WATER METER BOX TO FG PER UDACS PLATE NO. 2.
- 5 ADJUST SSMH AND SDMH TO FG AND CONSTRUCT CONCRETE COLLAR PER USD. DWG. #408
- 6 ADJUST ELECTRICAL OR TELEPHONE MANHOLE TO FG AND CONSTRUCT CONCRETE COLLAR
- 7 ADJUST GAS VALVE TO FG AND CONSTRUCT CONCRETE COLLAR
- 8 ADJUST TELEPHONE MANHOLE TO FG AND CONSTRUCT CONCRETE COLLAR (BY OTHERS)


APPROVED FOR CONSTRUCTION
Matthew D. Meyer 08/21/12
LVVMD ENGINEERING SERVICES MANAGER DATE
PROJECT NO. 116912

GENERAL NOTE:
1. LENGTH OF ASPHALT PATCH SHOWN ON THE DRAWINGS IS TO THE CENTER OF THE ASPHALT PATCH UNLESS OTHERWISE NOTED.
2. ALL CONSTRUCTION ACTIVITIES WILL BE PERFORMED WITHIN CITY OF LAS VEGAS RIGHT-OF-WAY.

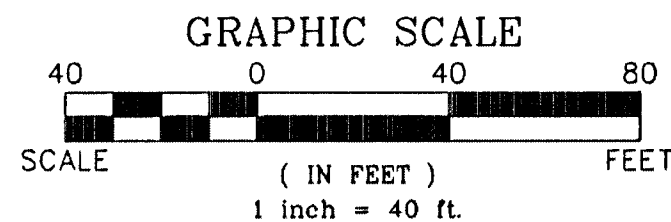

Sheet
UT-07
20 of 27
BID NO.
167X5984

TITLE: **BUFFALO DRIVE
CHARLESTON BLVD TO LAKE MEAD BLVD**
SHEET: **UTILITY PLAN
"BD" 138+00.00 TO "BD" 147+11.58**

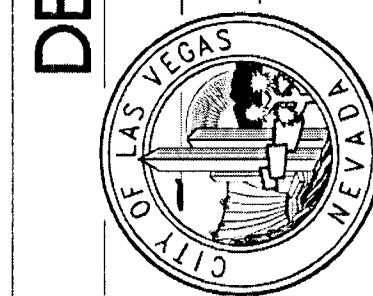

DEPARTMENT OF OPERATIONS
AND MAINTENANCE
DEPUTY DIRECTOR OF OPERATIONS AND MAINTENANCE:
JERRY WALKER, P.E.
DESIGNED BY: MDM
DRAWN BY: JAS
CHECKED BY: MDM
DATE: 8/1/12

NO.	REVISIONS	DATE

BUFFALO DRIVE-CHARLESTON BLVD TO LAKE MEAD BLVD

MATCHLINE "BD" 138+00.00
SEE SHEET UT-06

