



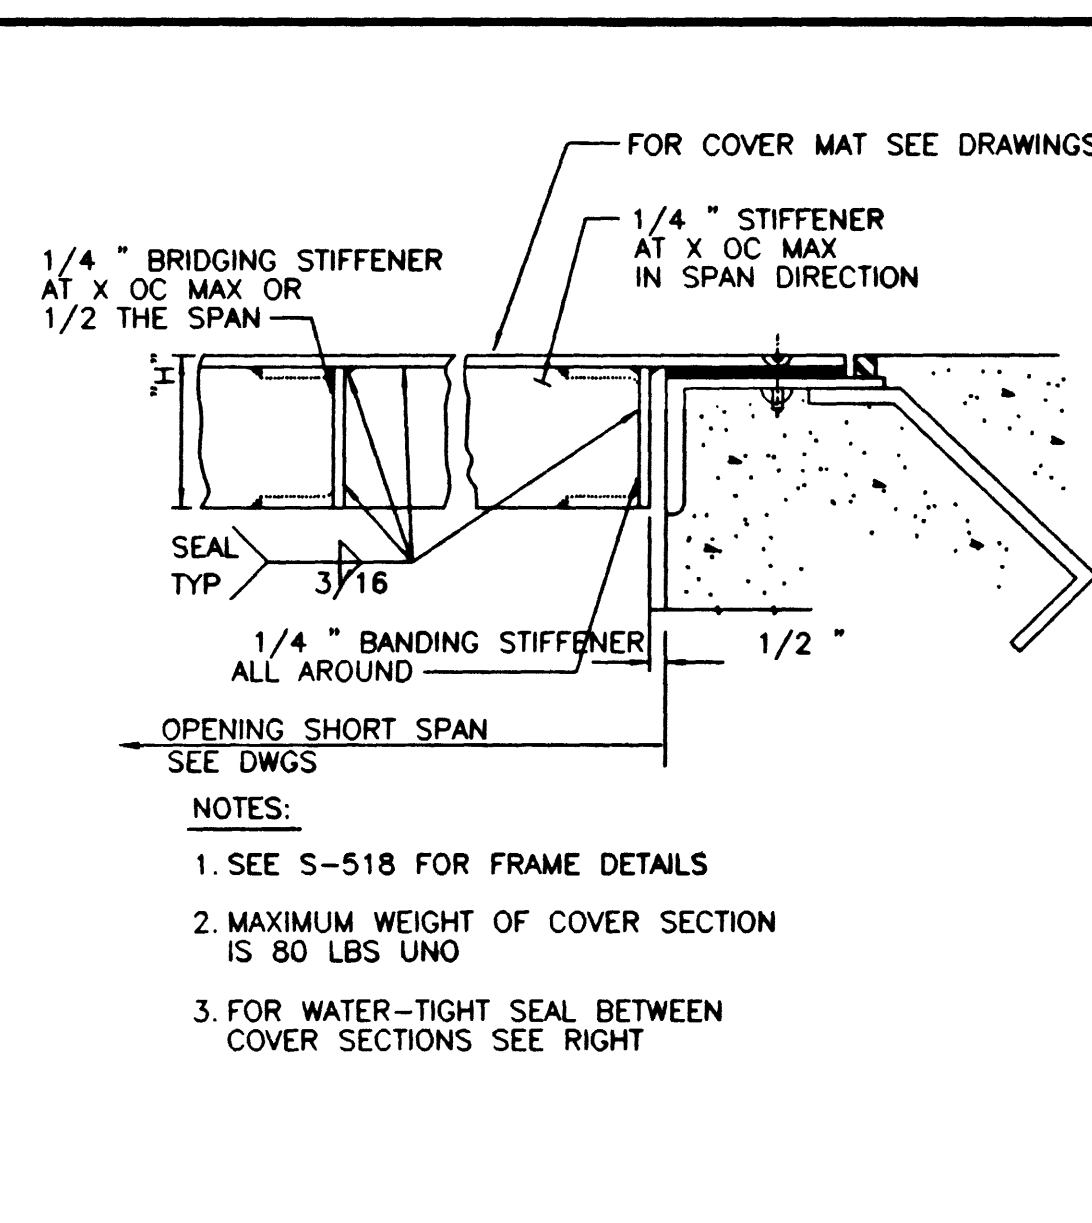

MATERIAL	LOADING (psf)	X MAX (in)	MAXIMUM SPAN OF OPENING (ft)						
			STIFFENER SIZE 1/4 " X H						
			2"	3"	4"	5"	C6X8.2	C7X9.8	C8X11.5
STEEL	100	40	4.5	6	7	8.5	12	14	15.5
	150	35	4	5	6	7.5	11.5	13	14.5
	200	30	3.5	4.5	5.5	7	11	12.5	14
	250	30	3	4	5	6	10.5	12	13
	300	30	3	4	4.5	5.5	10	11.5	12.5

MATERIAL	LOADING (psf)	X MAX (in)	MAXIMUM SPAN OF OPENING (ft)					
			STIFFENER SIZE 1/4 " X H					
			2"	3"	C4X2.33	C5X3.08	C6X4.030	
ALUMINUM	100	25	4.5	5.5	6	7	8	
	150	25	3.5	4.5	5.5	6.5	7.5	
	200	20	3.5	4.5	5.5	6.5	7	
	250	20	3	4	5	6	7	
	300	20	3	3.5	5.0	5.5	6.5	

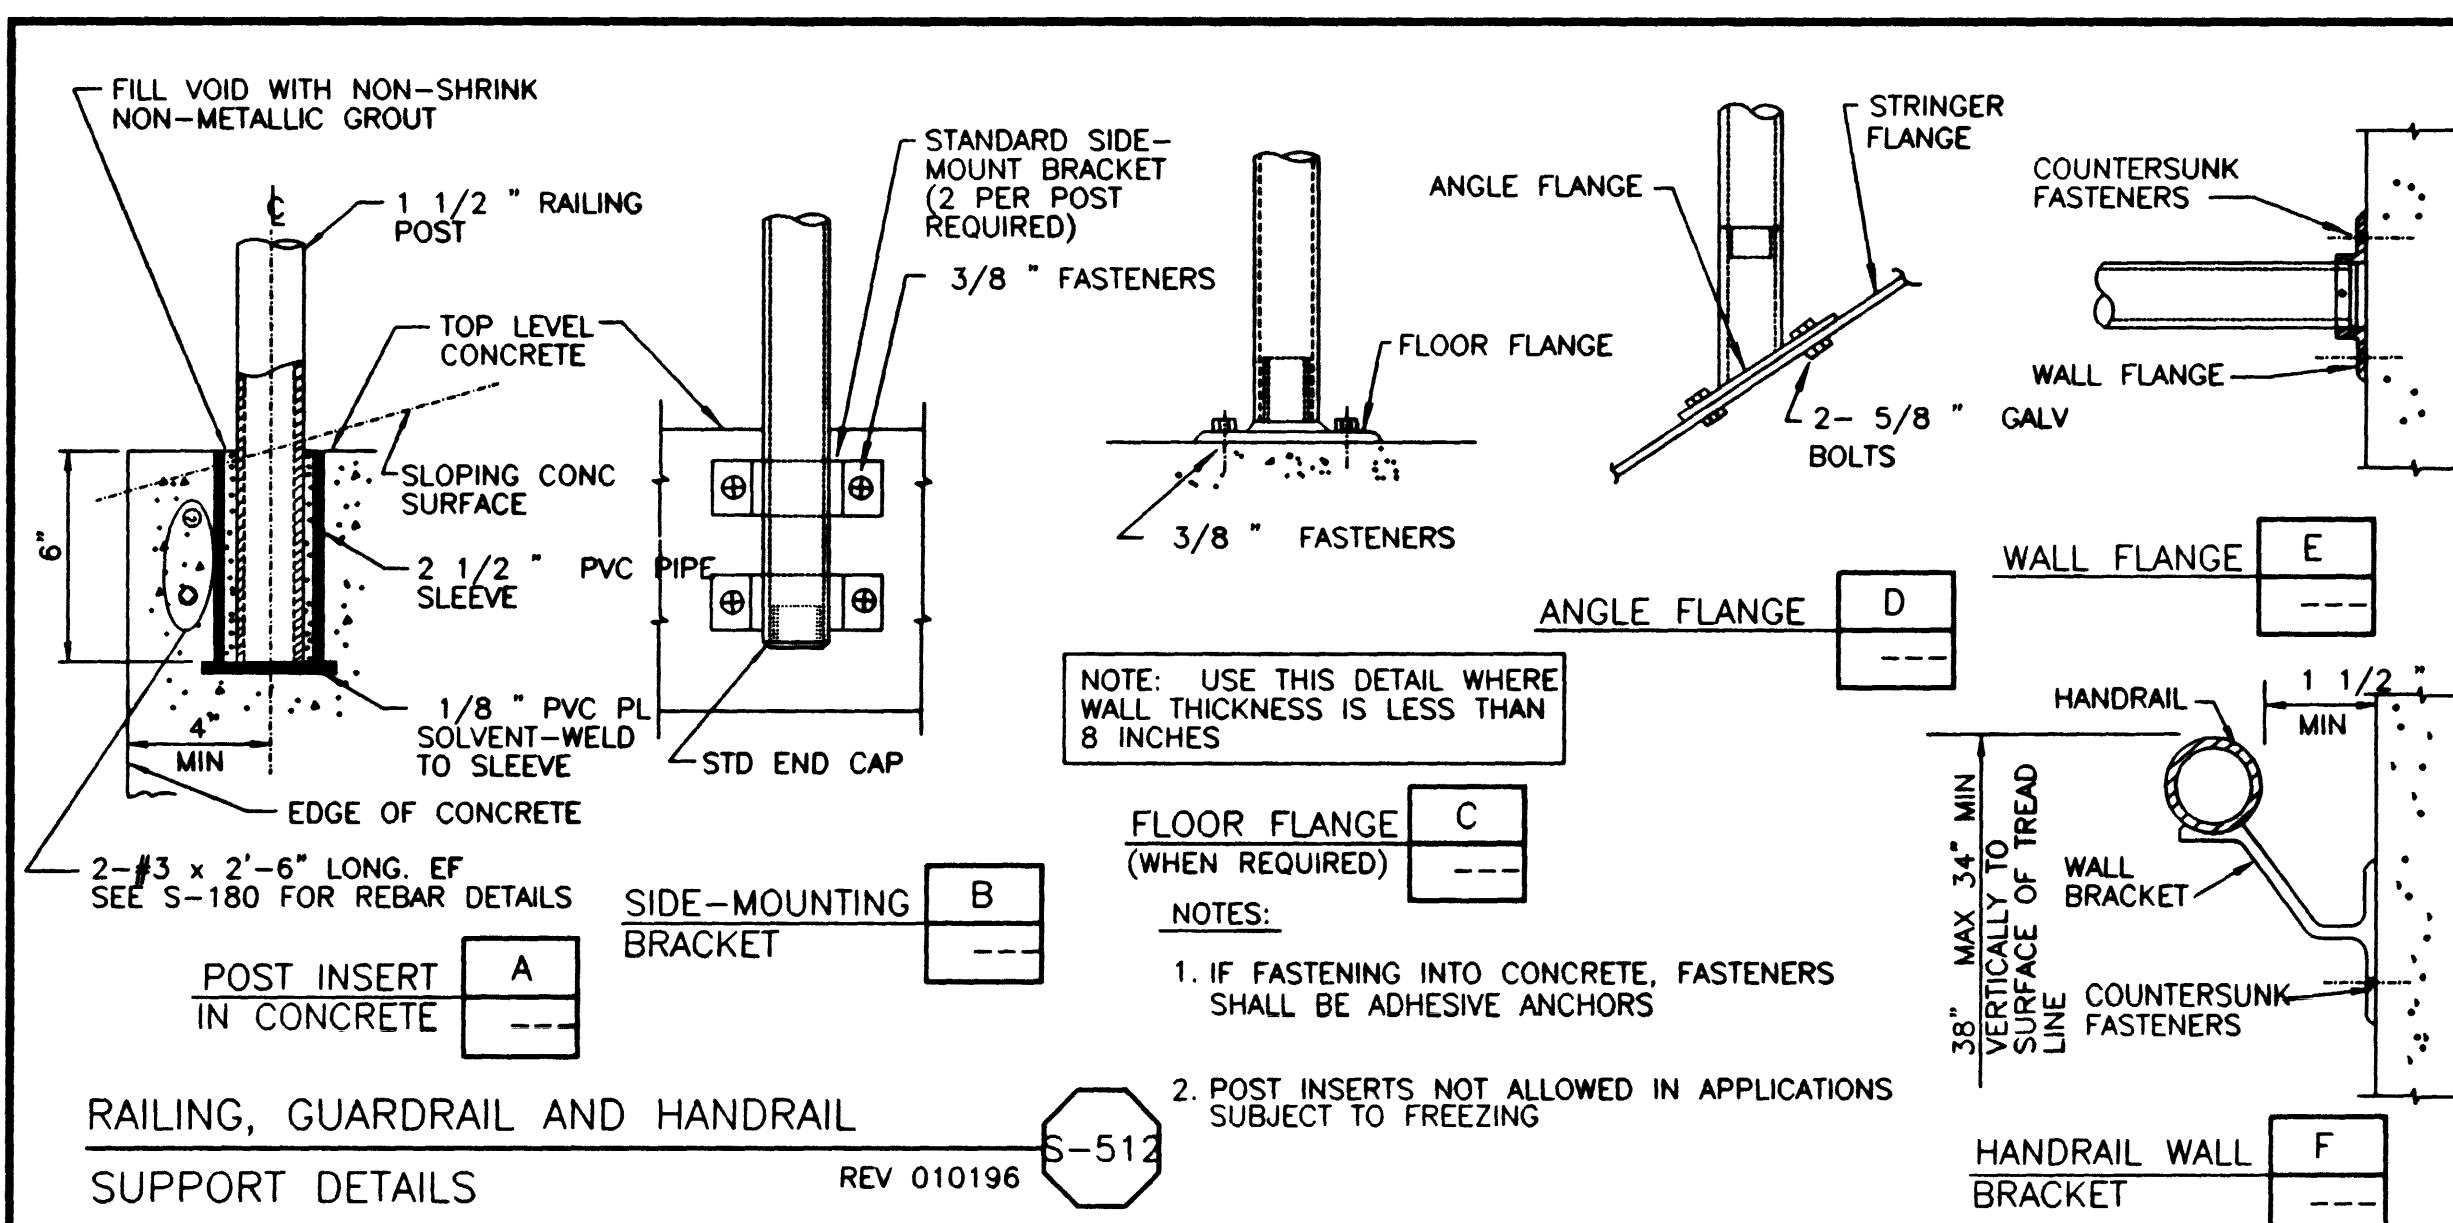