


16-13-76

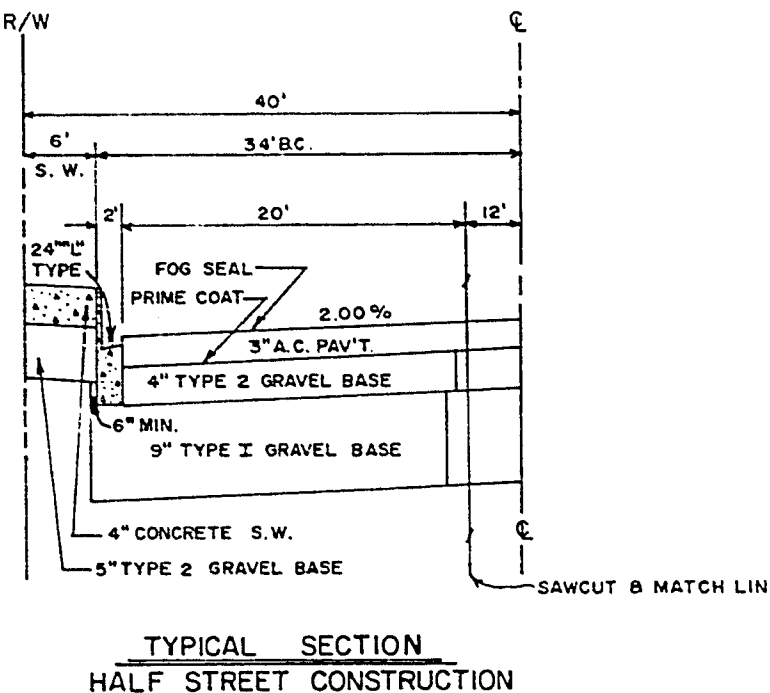

GENERAL NOTES

1. THE ITEM FOR ROADWAY EXCAVATION INCLUDES 936 S.Y. (.78 C.Y.) OF 3" A.C. PAVEMENT REMOVAL AND 544 L.F. OF SAWCUT A.C. PAVEMENT.
2. THE ITEM FOR 3" A.C. PAVEMENT INCLUDES PRIME COAT & FOG SEAL.
3. ROADWAY EXCAVATION MATERIAL (APPROX. 596 C.Y.) TO BE USED AS FILL MATERIAL IN BOB BASKIN PARK, AS DETERMINED BY THE FIELD ENGINEER.

APPROXIMATE QUANTITIES - THIS SHEET			
ITEM	DESCRIPTION	UNIT	QUANTITY
203.00.01	ROADWAY EXCAVATION	C. Y.	674
302.00.01	TYPE 1 GRAVEL BASE	C. Y.	300
302.00.02	TYPE 2 GRAVEL BASE	C. Y.	164
401.00.06	3" A.C. PAVEMENT	TON	196
613.00.01	24" "L" TYPE CURB & GUTTER	L. F.	447
613.00.08	4" CONC. SIDEWALK	S. F.	2682
613.03.04	COMMERICAL DRIVEWAY (2)	S. F.	448

