

MATCH LINE STA 122+00 SEE SHEET No. 20

(1767)
1.5' GM SILTY SANDY GRAVEL FILL
4.0' CL SANDY CLAY
7.0' ML SANDY SILT
10.0' CL SANDY CLAY
TEST HOLE No. 26
STA. 123+00

BONANZA ROAD

124+00.7 W.V. 4.5' LT. 13A
124+23.0 ELEC. CAB. 50.5' LT.
124+34.7 ELEC. M.H. 42.5' LT.

(1767)
2.0' GM SILTY GRAVELLY SAND FILL
8.0' CL SANDY CLAY
10.0' SM SILTY SAND
TEST HOLE No. 27
STA. 125+50

CURVE DATA

No	DETA	RADIUS	LENGTH	TANGENT	LOCATION
97	92° 15' 09"	25.00'	40.25'	26.00'	B/C
98	87° 44' 51"	25.00'	38.29'	24.04'	B/C
99	90° 00' 00"	25.00'	39.27'	25.00'	R/W
100	90° 00' 00"	31.00'	48.95'	31.00'	B/C

NOTE:
1. SEE SHT. No. 5 FOR VALLEY GUTTER AND WHEELCHAIR RAMP DETAILS
2. CONST. SIDEWALK FROM RC. TO P.T. AS SHOWN

MATCH LINE STA 127+50 SEE SHEET No. 22


122+45.9 BEGIN EXIST. C&G AND 6" S/W
123+32.7 ST. LIGHT 44' RT.

124+61.14 ST. LIGHT 44' RT.
125+60.3 ST. LIGHT 44' RT.

126+81 ST. LIGHT 44' RT.

APPROXIMATE QUANTITIES - THIS SHEET - BID GROUP 1					
ITEM No.	DESCRIPTION	CLARK C&G	SID	UNIT	TOTAL
203.00.01	ROADWAY EXCAVATION	16.515	23	C.Y.	1690
203.00.01A	SCARIFY & RECOMPACT SUBGRADE			S.Y.	
302.00.01	TYPE 1 AGGREGATE BASE	1722	281	C.Y.	2003
302.00.02	TYPE 2 AGGREGATE BASE	876	126	C.Y.	1002
401.00.10	ASPHALTIC CONCRETE PAVEMENT	1830	210	TONS	2040
406.00.01	BITUMINOUS PRIME COAT	1344	176	GAL.	1725
609.03.06	ADJUST WATER VALVE			E.A.	1
613.00.01	24-INCH "I" TYPE CURB & GUTTER		454	L.F.	454
613.00.08	CONCRETE SIDEWALK	521		S.F.	521
407.00.01	FOG SEAL	775	88	GAL.	863
613.00.14	VALLEY GUTTER	1102		S.F.	1102
ADDITIVE ITEM					
74	OPEN-GRADED PLANT MIX	4709	550	S.Y.	5259

T.B.M. R.R. SPIKE NEAR S.W. ASPHALT CURB PAGE ST. ELEV. 1769.62

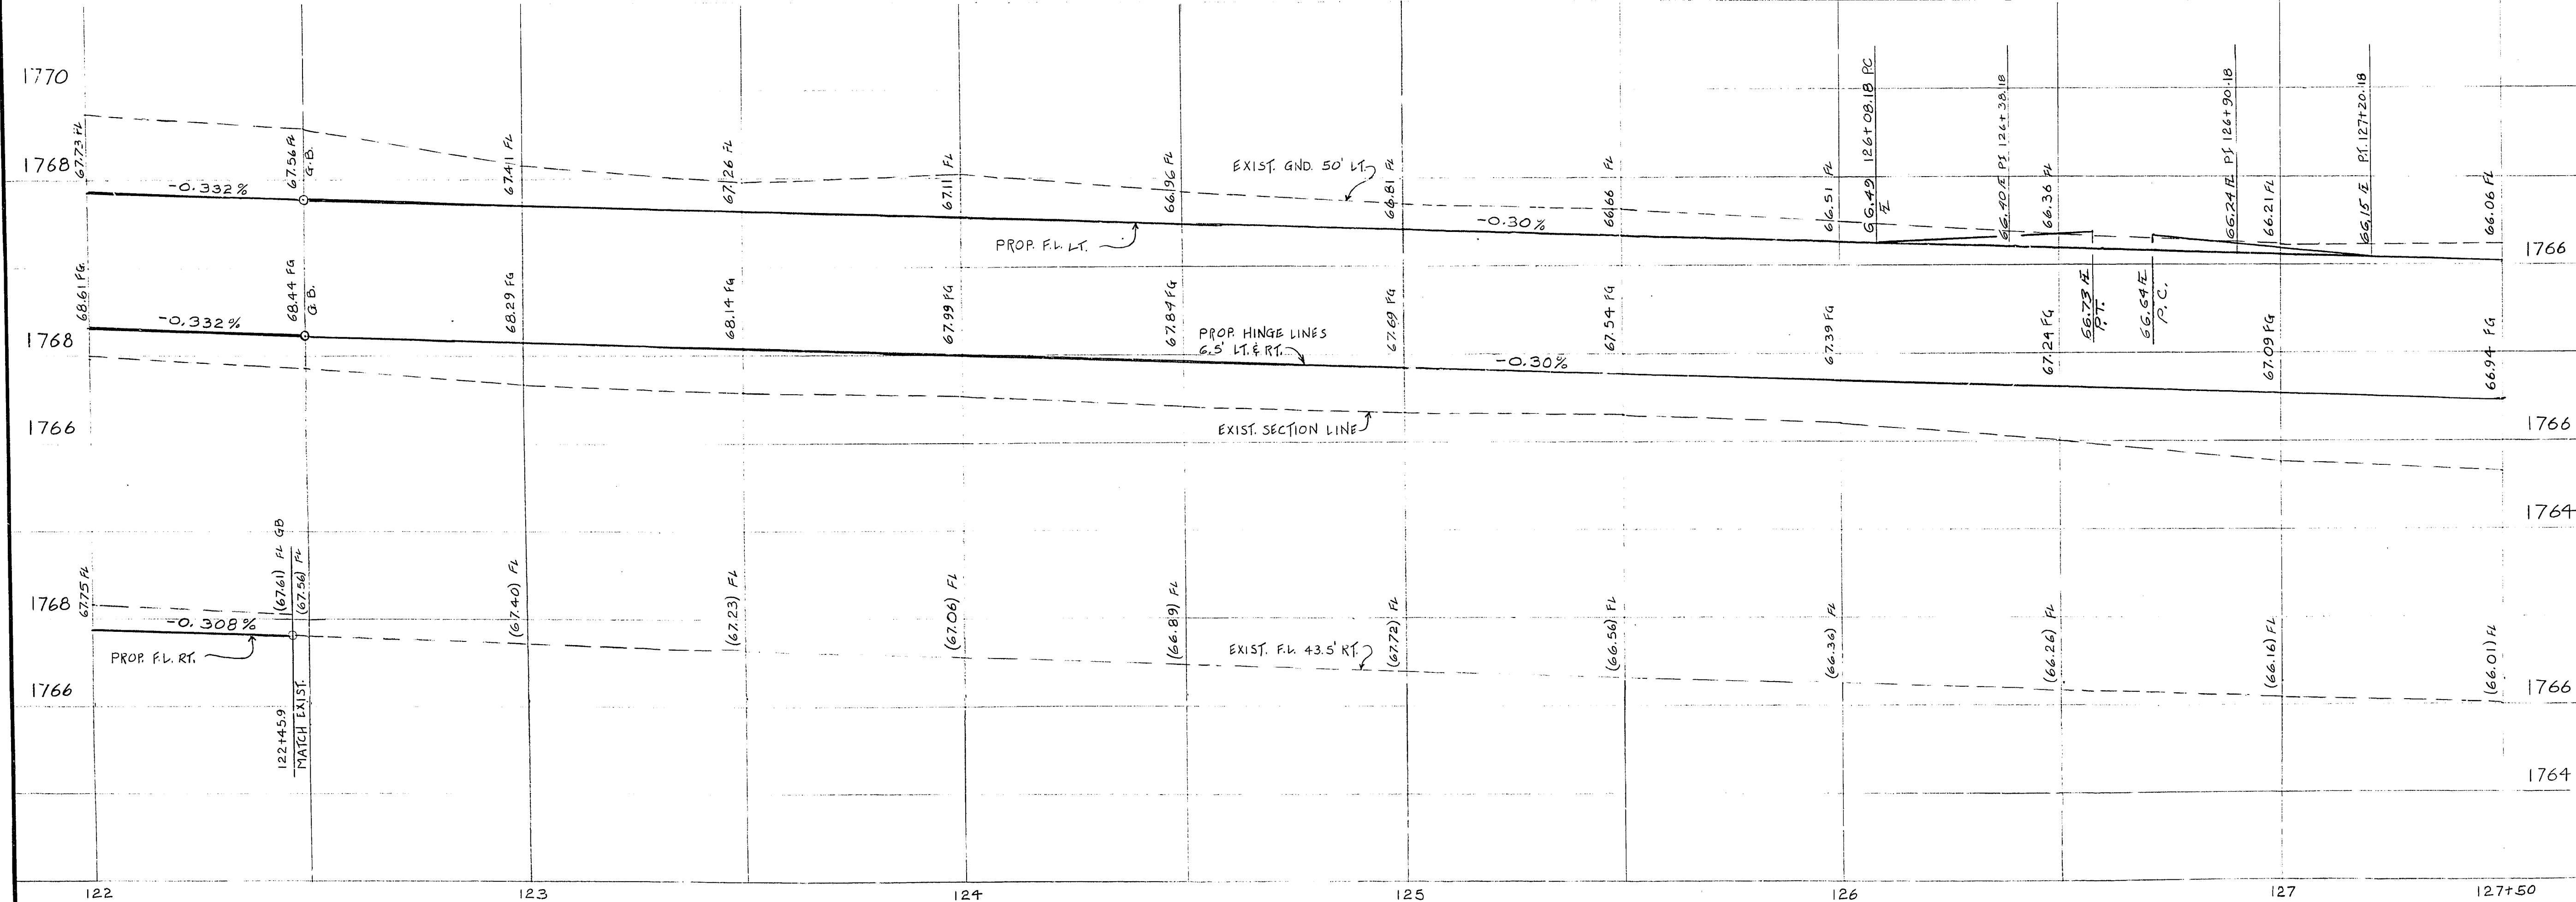

Department of Public Services Engineering Design Division

PLAN & PROFILE

BONANZA ROAD
PECOS DR. TO LAS VEGAS WASH

PHASE II



Drawing no. 107-V849B 2/67

184-96