

TYPE "L" CURB & GUTTER	7646	L.F.
TYPE II AGGREGATE BASE	4709	C.V.
5' CONCRETE SIDEWALK	38,232	S.F.
3 3/4" A.C. PAVEMENT	4052	C.V.
CHANNEL LINING	229,969	S.F.
STREET LIGHT	48	EA.
1 1/4" PVC CONDUIT	7630	L.F.
PULL BOX	48	EA.
C.L.V. BARRICADE	2	EA.
DRIVEWAY OPTION "A"	672	S.F.
CHANNEL ACCESS	3	EA.
CHANNEL ACCESS RAMP	5800	S.F.
RIP RAP	228	S.F.
4' TYPE "A" INLET 4' DEEP	1	EA.
7' TYPE "C" INLET 4' DEEP	1	EA.
48" RCP	29	L.F.
30" RCP	14	L.F.
18" RCP	73	L.F.
7'X24' CON-SPAN/W BOTTOM SLAB	56	L.F.
12" GV	1	EA.
12" PVC PIPE	0	L.F.
1 1/2" WATER SERVICE	1	EA.

1. ALL STREET LIGHT INSTALLATIONS SHALL CONFORM TO THE STANDARD DETAILS AND SPECIFICATIONS OF THE CITY OF LAS VEGAS, AND SHALL ALSO CONFORM TO THE UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION OF OFF-SITE IMPROVEMENTS, CLARK COUNTY AREA, LATEST EDITION, UNLESS OTHERWISE NOTED.

ACCEPTANCE OF THESE DRAWINGS BY THE LAS VEGAS VALLEY WATER DISTRICT DOES NOT RELIEVE DEL WEBB COMMUNITIES, INC.'S RESPONSIBILITY FOR COMPLIANCE WITH ALL FEDERAL, STATE AND LOCAL LAWS INCLUDING THE FEDERAL ENDANGERED SPECIES ACT.

Kerin Hill 9/28/89
DATE

**Call
before you
Dig.**


1-800-227-2600
UNDERGROUND SERVICE (USA)

	RIGHT OF WAY LINE		CONCRETE RAMP
	EASEMENT LINE		EDGE OF PAVEMENT
	EXIST. WATER LINE		100W HPS LUMINAIRE W/11 GA. POLE
	EXIST. SEWER LINE		NO. 3 1/2 CONCRETE PULL BOX W/METAL COVER
	FIRE HYDRANT W/LEAD AND G.V.		STOP SIGN
	WATER LINE		STREET SIGN
	SEWER LINE WITH MANHOLE		S.P.O.C. (SERVICE POINT OF CONNECTION)
	SEWER LATERAL		IRRIGATION ELECTRICAL METER
	GATE VALVE		STUB
	1 1/4" PVC CONDUIT (STREET LIGHTS)		VALVE VAULT
	VAULT MANHOLE WITH SLOW-OFF RISER		C.L.V. BARRICADE
	(TEMPORARY) BLOCK WALL		
	TOP OR TOE OF SLOPE		

1. ALL CONSTRUCTION AND MATERIALS FOR THIS PROJECT SHALL BE IN ACCORDANCE WITH THE MOST RECENT EDITION OF DESIGN AND CONSTRUCTION STANDARDS OF THE UNIFORM STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION, LATEST EDITION, IMPROVEMENTS, CLARK COUNTY AREA, NEVADA, EXCEPT AS MODIFIED BY THE CONTRACT DRAWINGS AND SPECIFICATIONS.
2. 48 HOURS PRIOR TO START OF CONSTRUCTION, THE CONTRACTOR SHALL CONTACT
LAS VEGAS VALLEY WATER DISTRICT PHONE 870-2011
NORTH VALLEY WATER COMPANY 1-800-227-2600
CENTRAL TELEPHONE COMPANY 1-800-227-2600
SOUTHWEST GAS CORPORATION PHONE 366-2296
3. LOCATIONS OF UNDERGROUND UTILITIES SHOWN ON THE DRAWINGS WERE OBTAINED FROM INFORMATION RECEIVED FROM THE APPLICABLE UTILITY CO'S. NEITHER THE CONTRACTOR NOR ENGINEER ASSUMES RESPONSIBILITY FOR UTILITIES OR STRUCTURES NOT SHOWN, OR NOT IN THE LOCATION SHOWN ON THE DRAWINGS. CONTRACTOR TO VERIFY THE EXACT LOCATION OF UTILITIES PRIOR TO START OF CONSTRUCTION. THE CONTRACTOR SHALL BE RESPONSIBLE REGARDING THE UTILITIES AS BE REQUIRED UNDER SECTION 107.17 OF THE UNIFORM STANDARD SPECIFICATIONS FOR CLARK COUNTY AREA, NEVADA, AND AS PROVIDED IN THE SPECIFICATIONS. THE CONTRACTOR SHALL USE EXTREME CAUTION WHEN WORKING OVER OR NEAR THE EXISTING GAS MAINS.
4. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONARY MEASURES NECESSARY TO PROTECT EXISTING IMPROVEMENTS, WHICH ARE TO REMAIN IN PLACE, FROM DAMAGE AND ALL SUCH IMPROVEMENTS OR STRUCTURES DAMAGED BY THE CONTRACTORS OPERATIONS SHALL BE RECONSTRUCTED OR REPAIRED SATISFACTORILY TO THE ENGINEER AT THE EXPENSE OF THE CONTRACTOR.
5. THE CONTRACTOR SHALL NOT REMOVE TREES, SHRUBS, LAWNS, WALLS, FENCES, SIGNS, STRUCTURES, LIGHTS, OR ANY EXISTING IMPROVEMENTS OUTSIDE OF STREET RIGHT-OF-WAY, EXCEPT WHERE REQUIRED TO DO SO BY THE CONTRACT DRAWINGS OR BY THE ENGINEER.
6. TREES, SHRUBS, LAWNS, WALLS, FENCES, SIGNS, STRUCTURES, LIGHTS AND OTHER EXISTING IMPROVEMENTS WITHIN STREET RIGHTS-OF-WAY SHALL BE REMOVED WHERE SHOWN ON THE CONTRACT DRAWINGS, AND AS REQUIRED BY THE ENGINEER.
7. REPLACEMENT, RELOCATION OR RECONSTRUCTION OF ALL EXISTING IMPROVEMENTS INCLUDING SPRINKLER SYSTEMS, LAWNS, FENCES, WALLS, SIGNS, STEPS, SIDEWALKS, DRIVEWAYS, LAMP LIGHTS, AND ALL OTHER ITEMS APPLICABLE TO THIS CONTRACT SHALL BE REQUIRED BY THE ENGINEER.
8. THE CONTRACTOR SHALL BACKFILL AND FILL GRADE ALL CUT OR FILL SLOPES TO MATCH EXISTING CONDITIONS TO THE SATISFACTION OF THE ENGINEER, WHERE EXISTING LAWS ARE DAMAGED BY THE CONTRACTOR'S OPERATIONS. THE CONTRACTOR SHALL RECONSTRUCT OR REPAIR ALL DAMAGE TO A CONDITION EQUAL TO, OR BETTER THAN EXISTED PRIOR TO CONSTRUCTION.
9. ALL BARRICADING AND TEMPORARY TRAFFIC CONTROL DEVICES OR METHODS USED DURING CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE "NEVADA TRAFFIC CONTROL MANUAL", 1985, PUBLISHED BY THE STATE OF NEVADA, DEPARTMENT OF HIGHWAYS, OR EXCEPT AS OTHERWISE PROVIDED IN THE CONTRACT SPECIFICATIONS OR AS REQUIRED BY THE ENGINEER.

N 01°12'43" E IS BASED ON THE NEVADA
GRID SYSTEM (EAST ZONE) AS DETERMINED
FROM THE TRIANGULATION POINTS "RED
ROCK" TO "LONE MOUNTAIN."

 PROJECT BENCHMARK: BRASS CAP IN TOP OF
6" DIA. CONCRETE CYLINDER 490' WEST OF DEL
WEBB BLVD. AT FUTURE B ST. N.532105.5031
E.584121.2223 ELEV. 2599.855

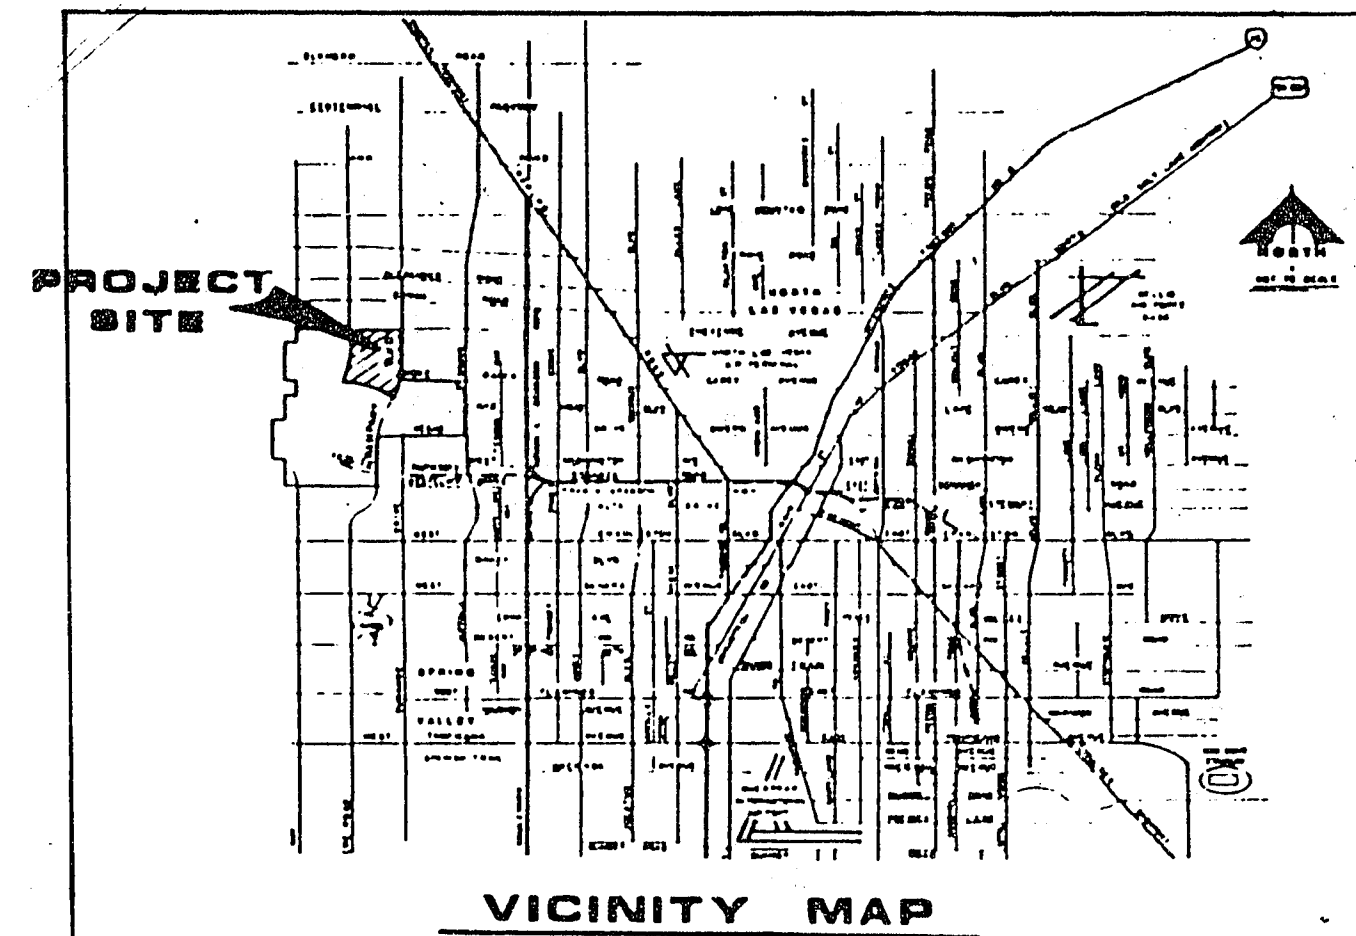

CHEYENNE AVE. & CHANNEL

- 1 COVER SHEET
- 2 QUANTITIES & GENERAL NOTES
- 3 PLAN & PROFILE STA. 232+38.05 TO STA. 380+00
- 4 PLAN & PROFILE STA. 332+00 TO STA. 344+00
- 5 PLAN & PROFILE STA. 344+00 TO STA. 356+00
- 6 PLAN & PROFILE STA. 356+00 TO STA. 368+00
- 7 PLAN & PROFILE STA. 368+00 TO STA. 380+00
- 8 PLAN & PROFILE STA. 380+00 TO STA. 392+00
- 9 PLAN & PROFILE STA. 392+00 TO STA. 399+25.31
- 10 RAMPART & CHEYENNE INTERSECTION
- 11 MISCELLANEOUS DETAILS
- 12 SECTIONS & DETAILS
- 13 MISCELLANEOUS SECTIONS & DETAILS
- 14 MISCELLANEOUS SECTIONS & DETAILS
- 15 MISCELLANEOUS SECTIONS & DETAILS
- 16 MISCELLANEOUS SECTIONS & DETAILS
- 17 MISCELLANEOUS SECTIONS & DETAILS

C.L.V. ENGINEER

Accepted by Kevin L. Hill
LAS VEGAS VALLEY WATER DISTRICT

Lauree Jackson
NEVADA POWER COMPANY

Deane T. Whitman
CENTEL

Donna E. Page
SOUTHWEST GAS

REV	DATE	DESCRIPTION
1	4/4/91	REVISED LIST OF DRAWINGS.
		6/25/91

6218 31 AUG 89
R.E. NO. DATE

RECOMMENDED
Mark D. Ross
 MICHAEL D. ROSS
 1992
 CURE

1555 SOUTH RAINBOW BLVD./LAS VEGAS, NEVADA 89102



G.C. WALLACE, INC.
Engineering/Architecture

MODEL E. WEBB COMMUNITIES, INC.:

SUN CITY SUMMERLIN
CHEYENNE AVE. & CHEYENNE CHANNEL

SHEET

OF 17 SHEET