



- GENERAL NOTES**
- 1. ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.
 - 2. ALL CONCRETE SHALL BE 3000 PSI STRENGTH.
 - 3. ALL CURBS SHALL BE 4" HIGH AND 12" WIDE.
 - 4. ALL DRIVEWAYS SHALL BE 12" WIDE.
 - 5. ALL DRIVEWAYS SHALL BE 12" WIDE.
 - 6. ALL DRIVEWAYS SHALL BE 12" WIDE.
 - 7. ALL DRIVEWAYS SHALL BE 12" WIDE.
 - 8. ALL DRIVEWAYS SHALL BE 12" WIDE.
 - 9. ALL DRIVEWAYS SHALL BE 12" WIDE.
 - 10. ALL DRIVEWAYS SHALL BE 12" WIDE.




BASE OF GRADE
 ALL ELEVATIONS ARE TO THE TOP OF THE CURB UNLESS OTHERWISE NOTED.
 ALL ELEVATIONS ARE TO THE TOP OF THE CURB UNLESS OTHERWISE NOTED.

BASE OF GRADE
 ALL ELEVATIONS ARE TO THE TOP OF THE CURB UNLESS OTHERWISE NOTED.



BRADLEY ROAD (PUBLIC)

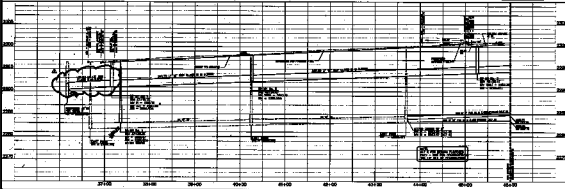

PLANNING AND DESIGN
 ALL ELEVATIONS ARE TO THE TOP OF THE CURB UNLESS OTHERWISE NOTED.

SCALE
 1" = 40'

DATE
 1/1/2000

PROJECT NO.
 123456

CLIENT
 ABC COMPANY

DESIGNER
 DEF ENGINEERS

CHECKED BY
 GHI

APPROVED BY
 JKL

ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.