


CONSTRUCTION NOTES

10. INSTALL STANDARD FIRE HYDRANT.
11. INSTALL 6" VALVE IN BOX.
12. INSTALL 6"x6"x6" TEE.
13. INSTALL 8"x8"x6" TEE.
14. INSTALL 8" VALVE IN BOX.
15. INSTALL 6" 90° ELL.
16. INSTALL 8" 90° ELL.
17. CONNECT TO EXISTING WATER MAIN.

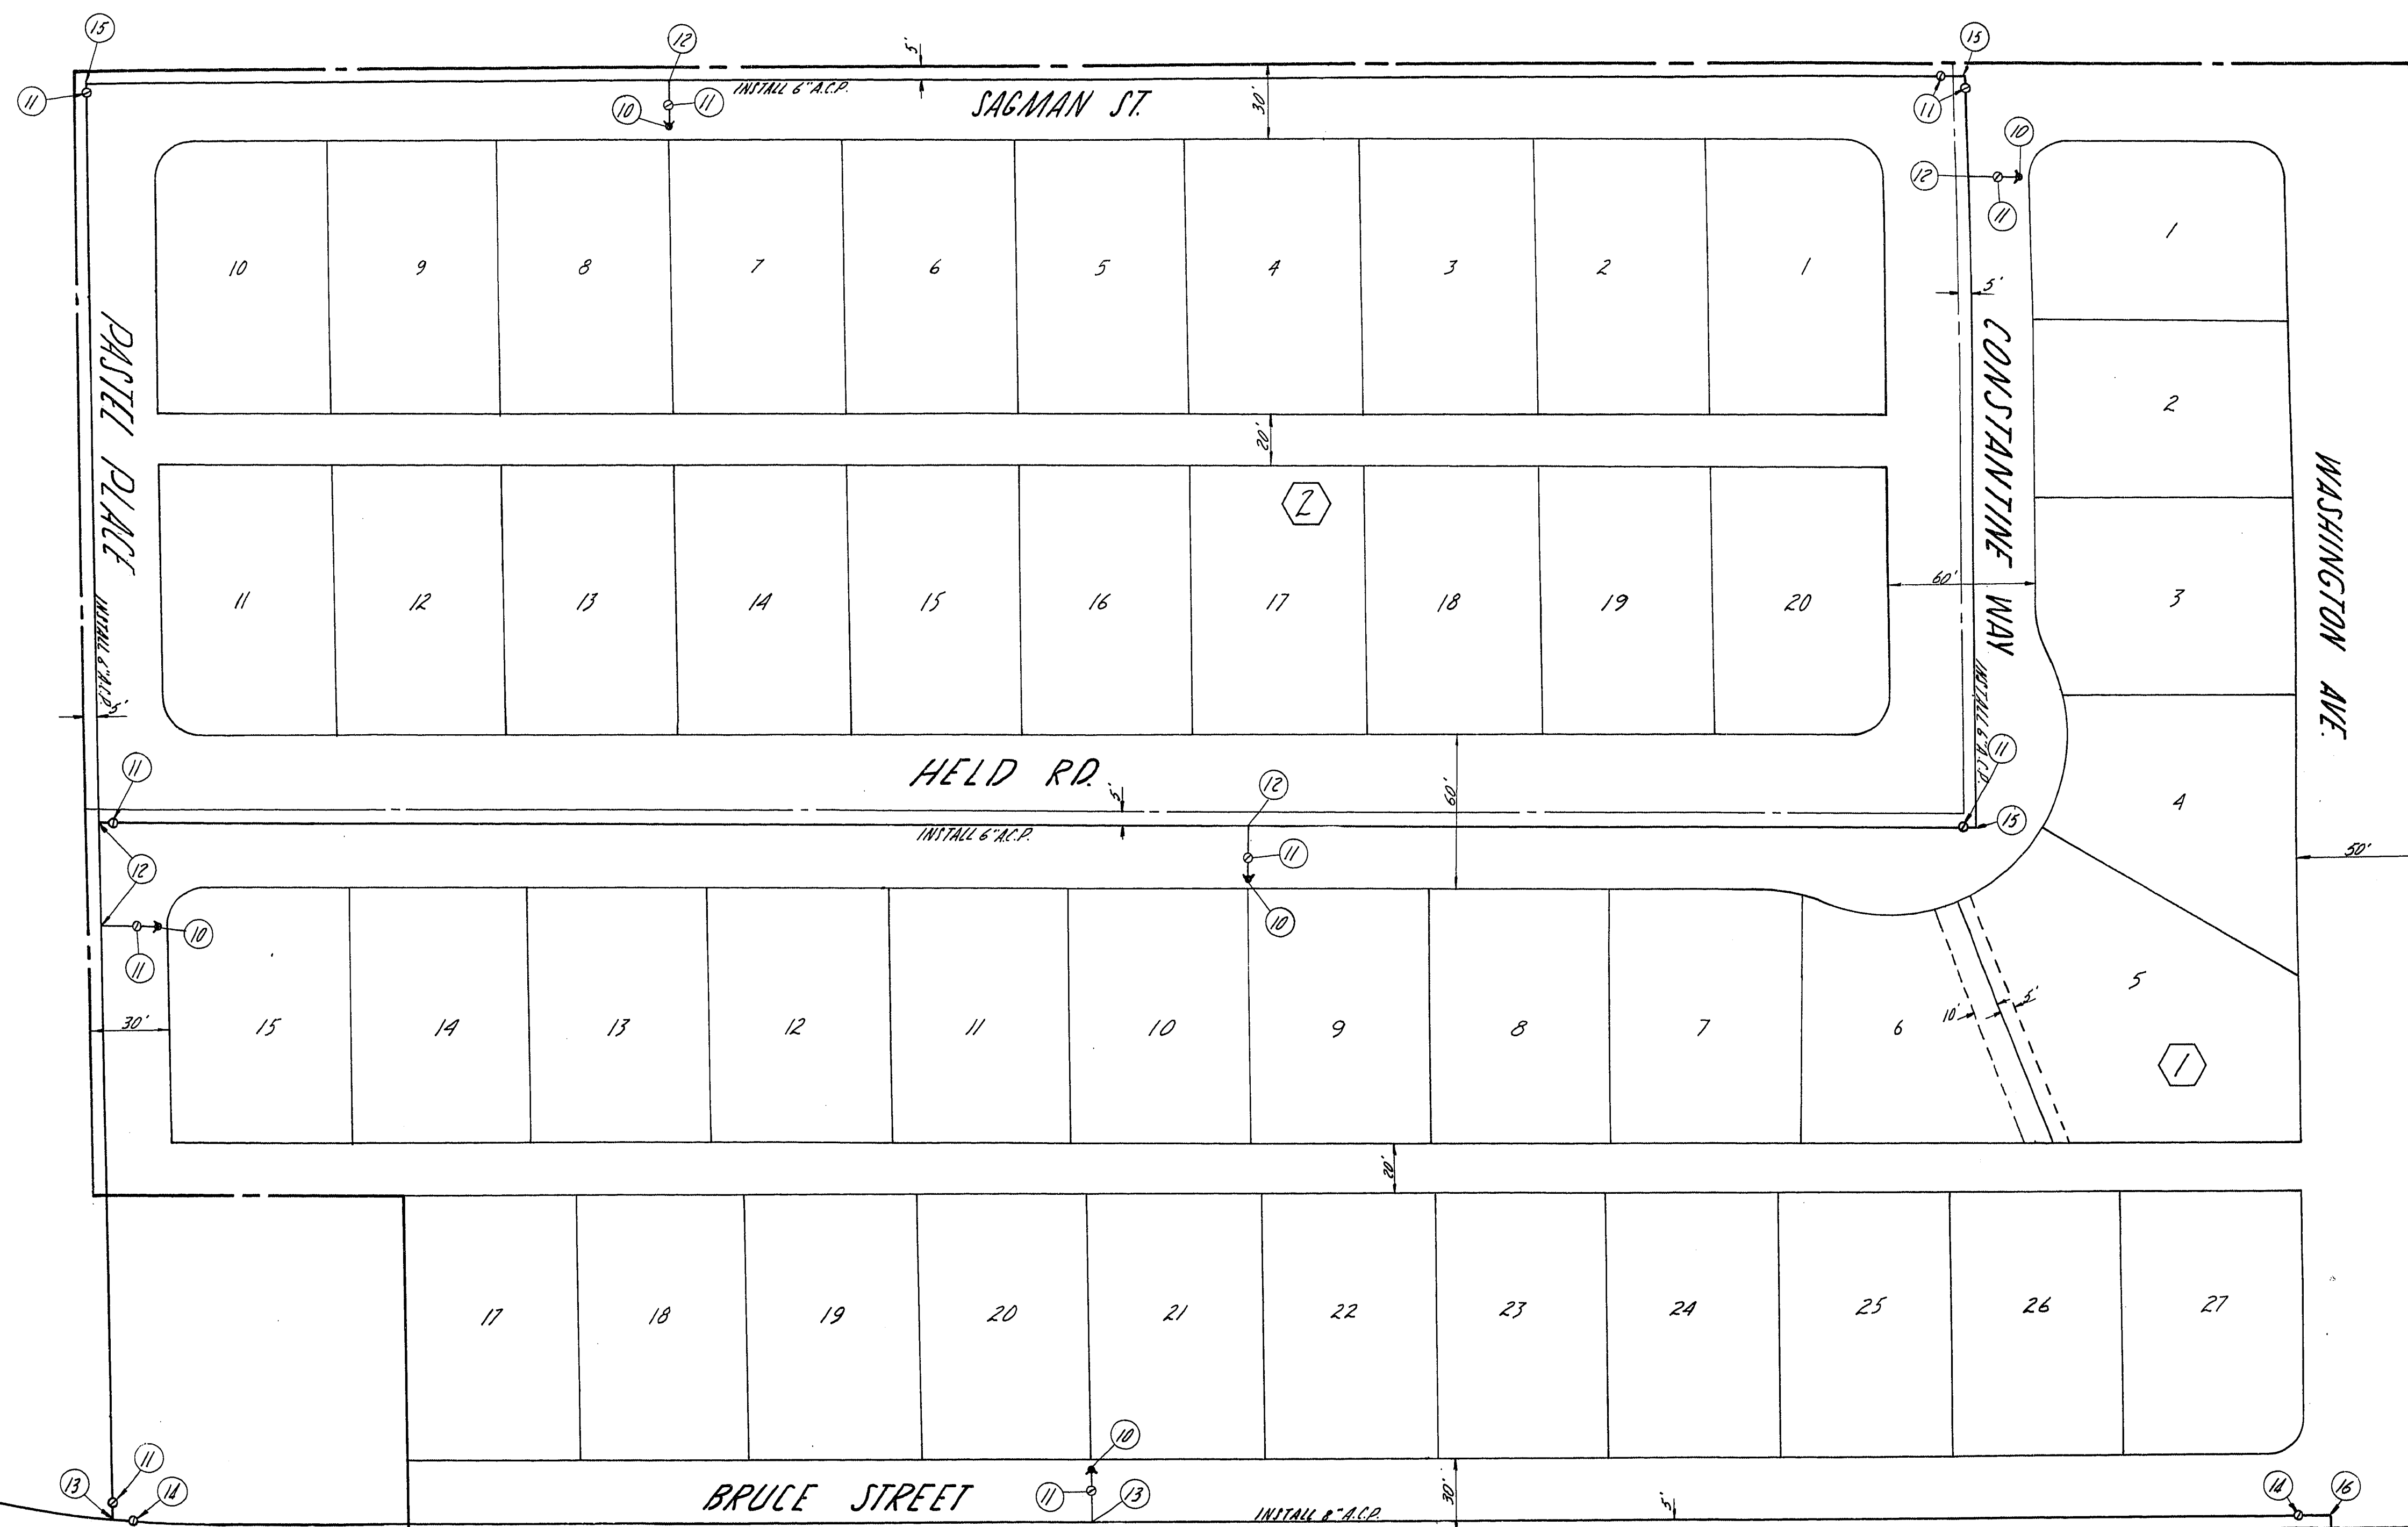

QUANTITY	ITEM	QUANTITY
8" WATER MAIN		1306 L.F.
6" WATER MAIN		2297 L.F.
STANDARD FIRE HYDRANT		5 EACH
6" VALVE IN BOX		11 EACH
8" VALVE IN BOX		2 EACH
6" 90° ELL		3 EACH
8" 90° ELL		1 EACH
6"x6"x6" TEE		5 EACH
8"x8"x6" TEE		2 EACH
3/4" COPPER WATER SERVICES		40 EACH

SCALE 1" = 40'

LAS VEGAS VALLEY WATER DISTRICT
 SUBMITTED BY: *[Signature]*
 VICTOR G. KRAMETBAUER
 R.E.E. 1511
 APPROVED BY: *[Signature]*
 CITY ENGINEER RCE 396

APPROVED BY: *[Signature]* 11/27/62
 LAS VEGAS FIRE CHIEF DATE

BRUCE GARDENS UNIT N° 1
 WATER PLAN

SHEET
 9
 OF 14

21-6-11

567-4-9857