
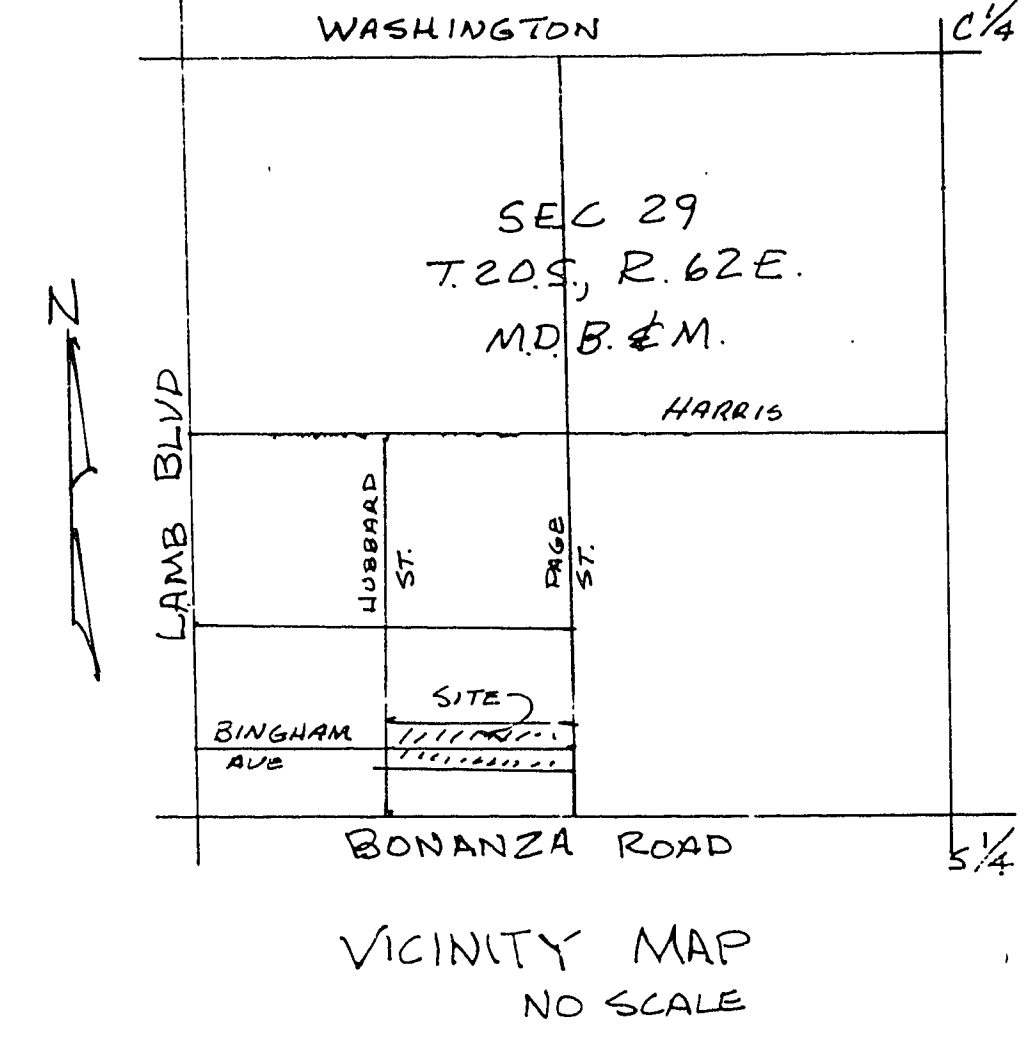


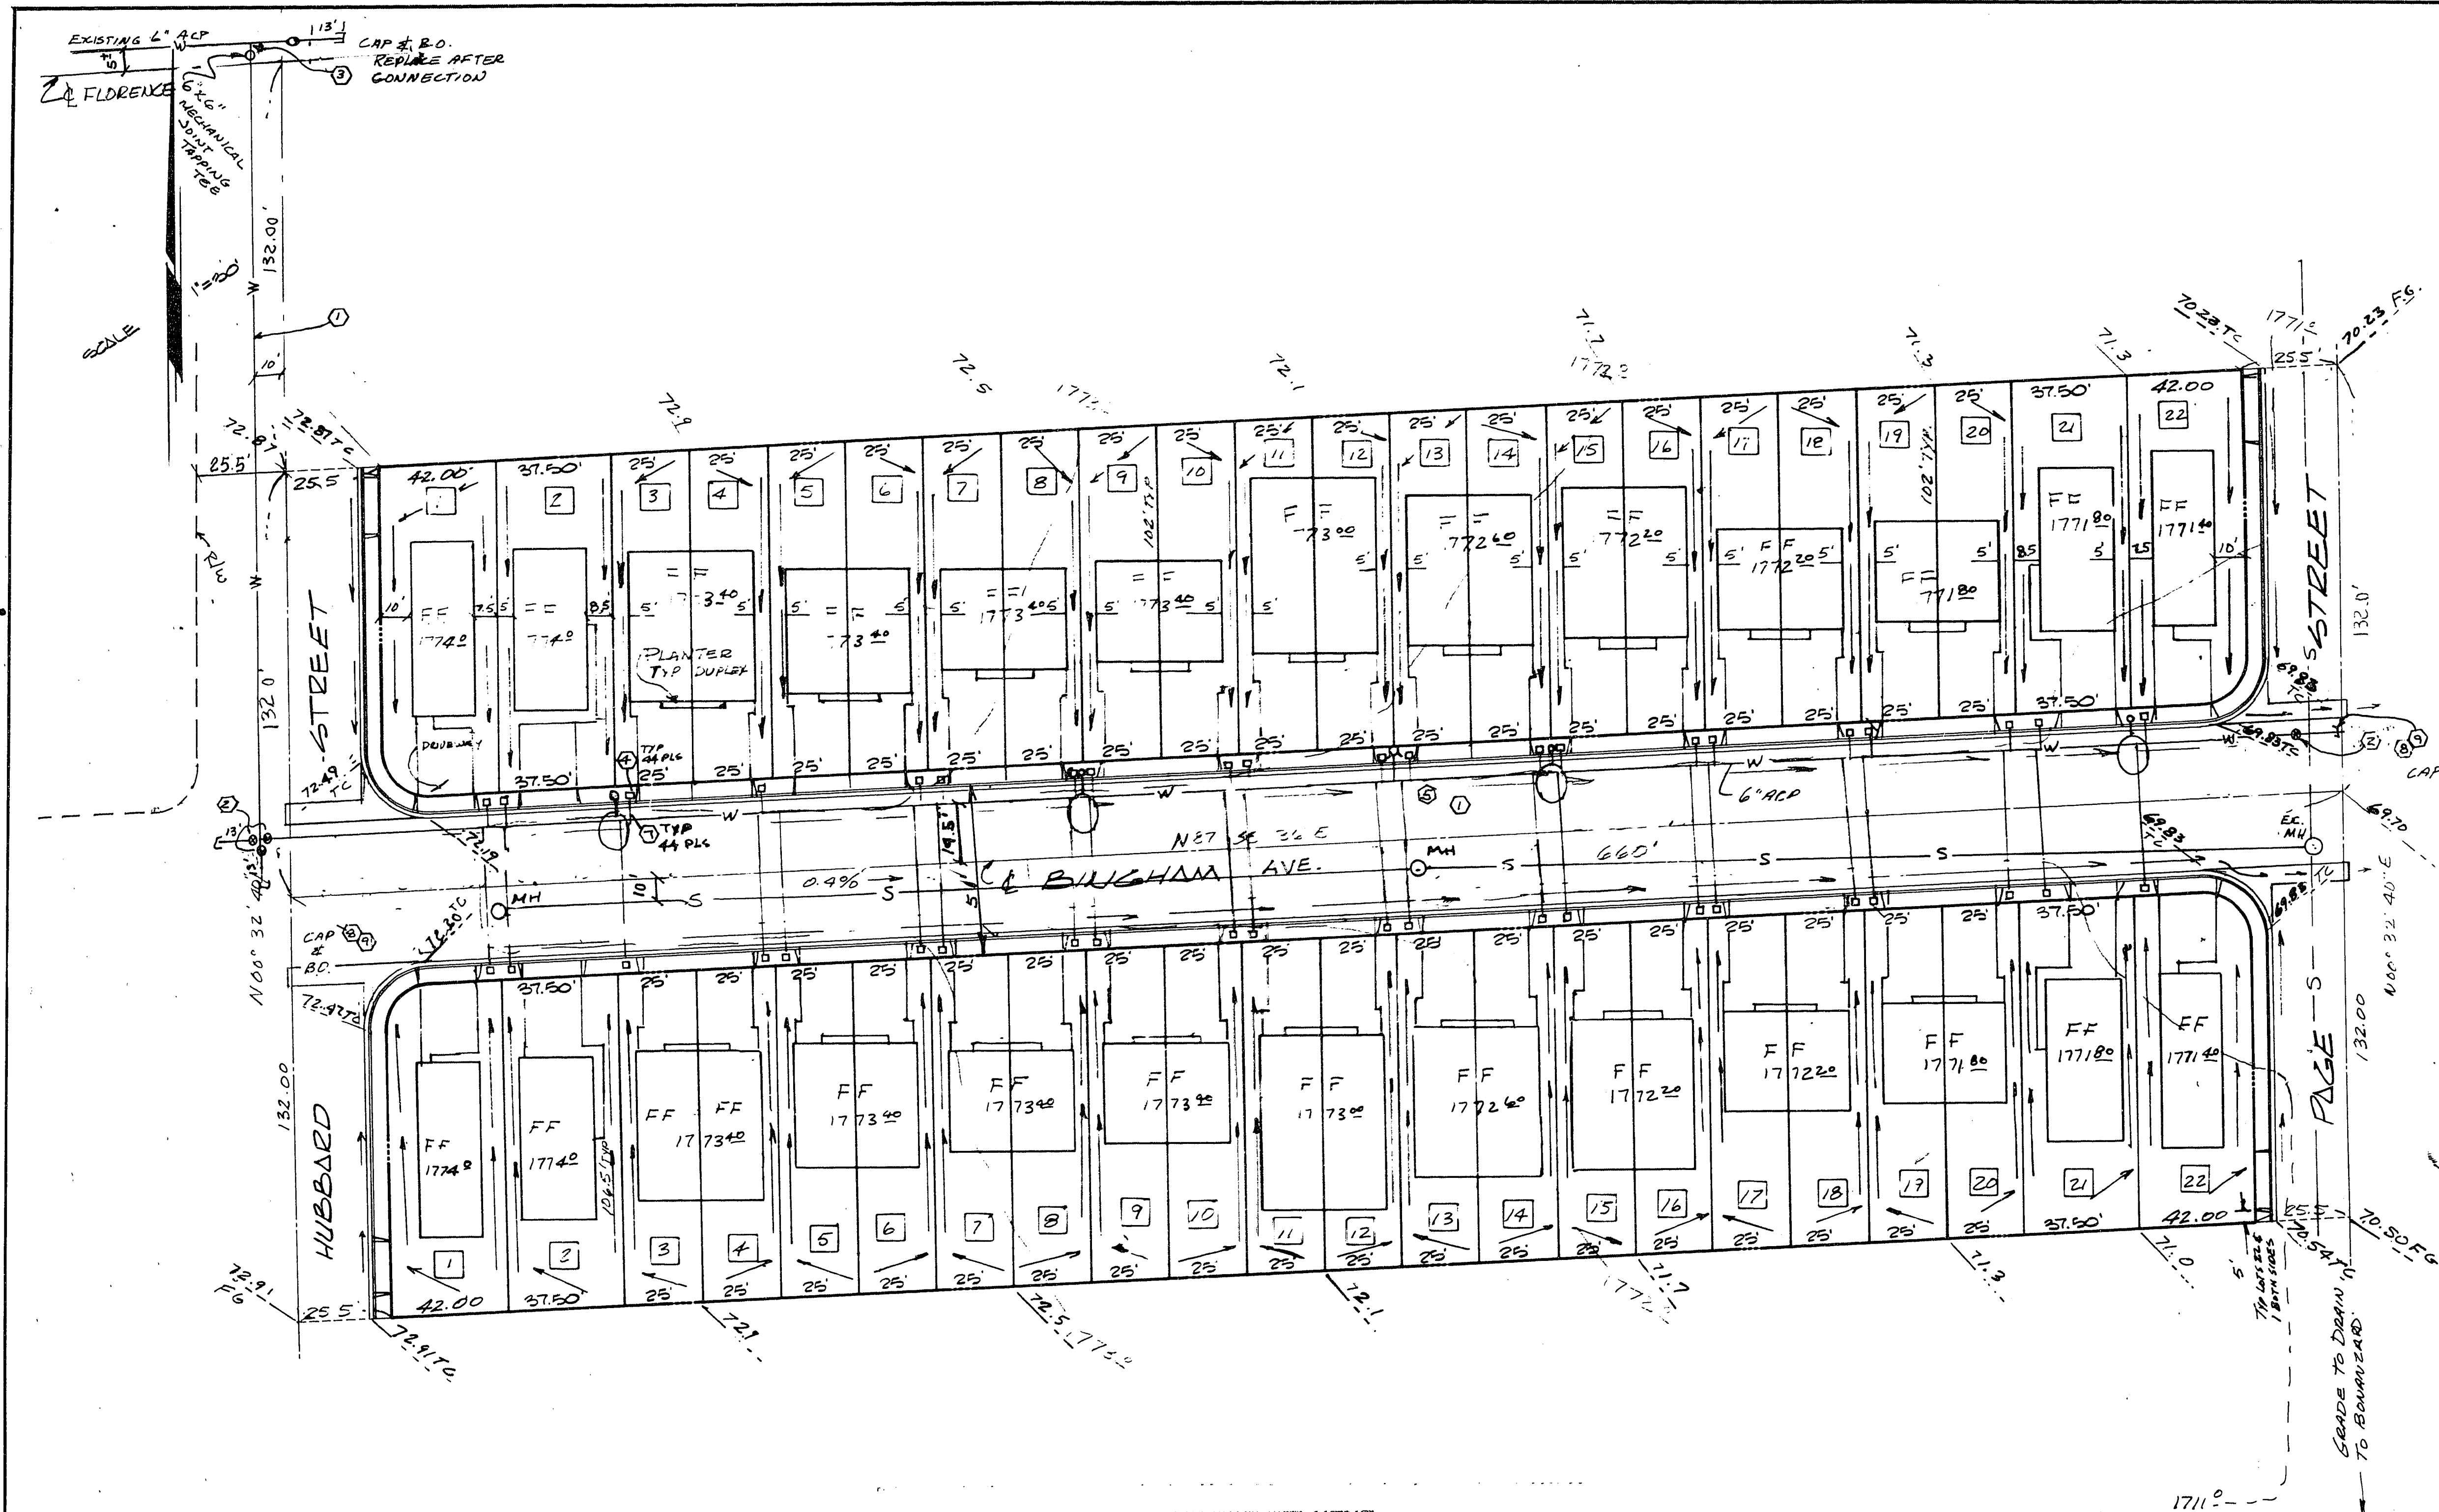

BENCH MARK
CITY OF LAS VEGAS DATUM
ELEV. 1773.31
BM# 0623001


LEGEND
□ LOT NUMBER
FF FINISHED FLOOR
G.B. GRADE BREAK

LAS VEGAS VALLEY WATER DISTRICT

- All work to conform to Las Vegas Valley Water District Standard Plates.
- All work, except as modified hereon or by Note No. 1, shall be done in accordance with the most current draft or edition of Uniform Standard Specifications for Public Works Construction Offsite Improvements Clark County area.
- Notice to be given Engineering Department of the Las Vegas Valley Water District 48 hours prior to actual construction.
- Service saddles or tapped collars will be required on all services; double tap collars are not permitted.
- All lines to be pressure tested to 200 psi.
- All valve boxes shall have concrete collars at surface of paved areas.
- Deflection angle shall not exceed 2 degrees per 13 feet section of pipe for pipe sizes smaller than 14 inches, and shall not exceed 2 degrees for pipe sizes between 14" and 16"
- All meters shall be located outside of driveways.
- Detector tape required in accordance with Standard Plate No. 27 where indicated and as follows:
 - Over all mains not installed at 6 feet from back of curb.
 - Over all service laterals not installed at right angles to mains.
- Call Before You Dig: 1-800-227-2600

WATER QUANTITIES

① 6" ACP WATER LINE	940 LF
② 6" NRS GATE VALVE W/ VALVE BOX & COVER	2 EA
③ 6" X 6" X 6" TEE W/ ANCHOR BLOCK	2 EA
④ 5/8" WATER METER	44 EA
⑤ STANDARD FIRE HYDRANT ASSEMBLY	1 EA
⑥ 3/4" SERVICE TAP	44 EA
⑦ 3/4" P.E. LATERAL	44 EA
⑧ 2" BLOW OFF ASSEMBLY	2 EA
⑨ 6" CAP	2 EA

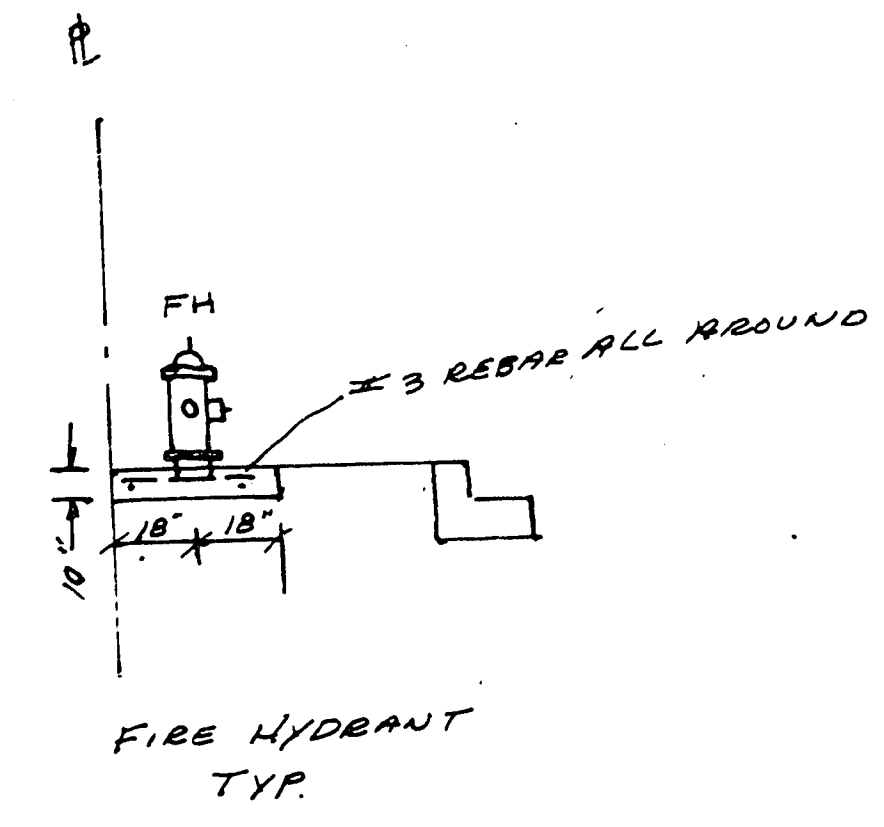

APPROVAL

[Signature] 11/4/83
C.L.V. CHIEF, LAND DEVELOPMENT & FLOOD CONTROL DATE
[Signature] 12/3/83
LAS VEGAS VALLEY WATER DIST. DATE
C.L.V. FIRE MARSHALL DATE

PREPARED FOR
GERALD LEAVITT

KENNETH D. FARRIMOND
REGISTERED ENGINEER
RLS #4134
LAS VEGAS NEVADA

BOULDER HEIGHTS ADDITION
TRACT 1
GRADING PLAN & WATER PLAN
SECTION 20 SOUTH, RANGE 62 EAST, M.D.B. & M.
CLARK COUNTY NEVADA

SHEET
2
OF
4