
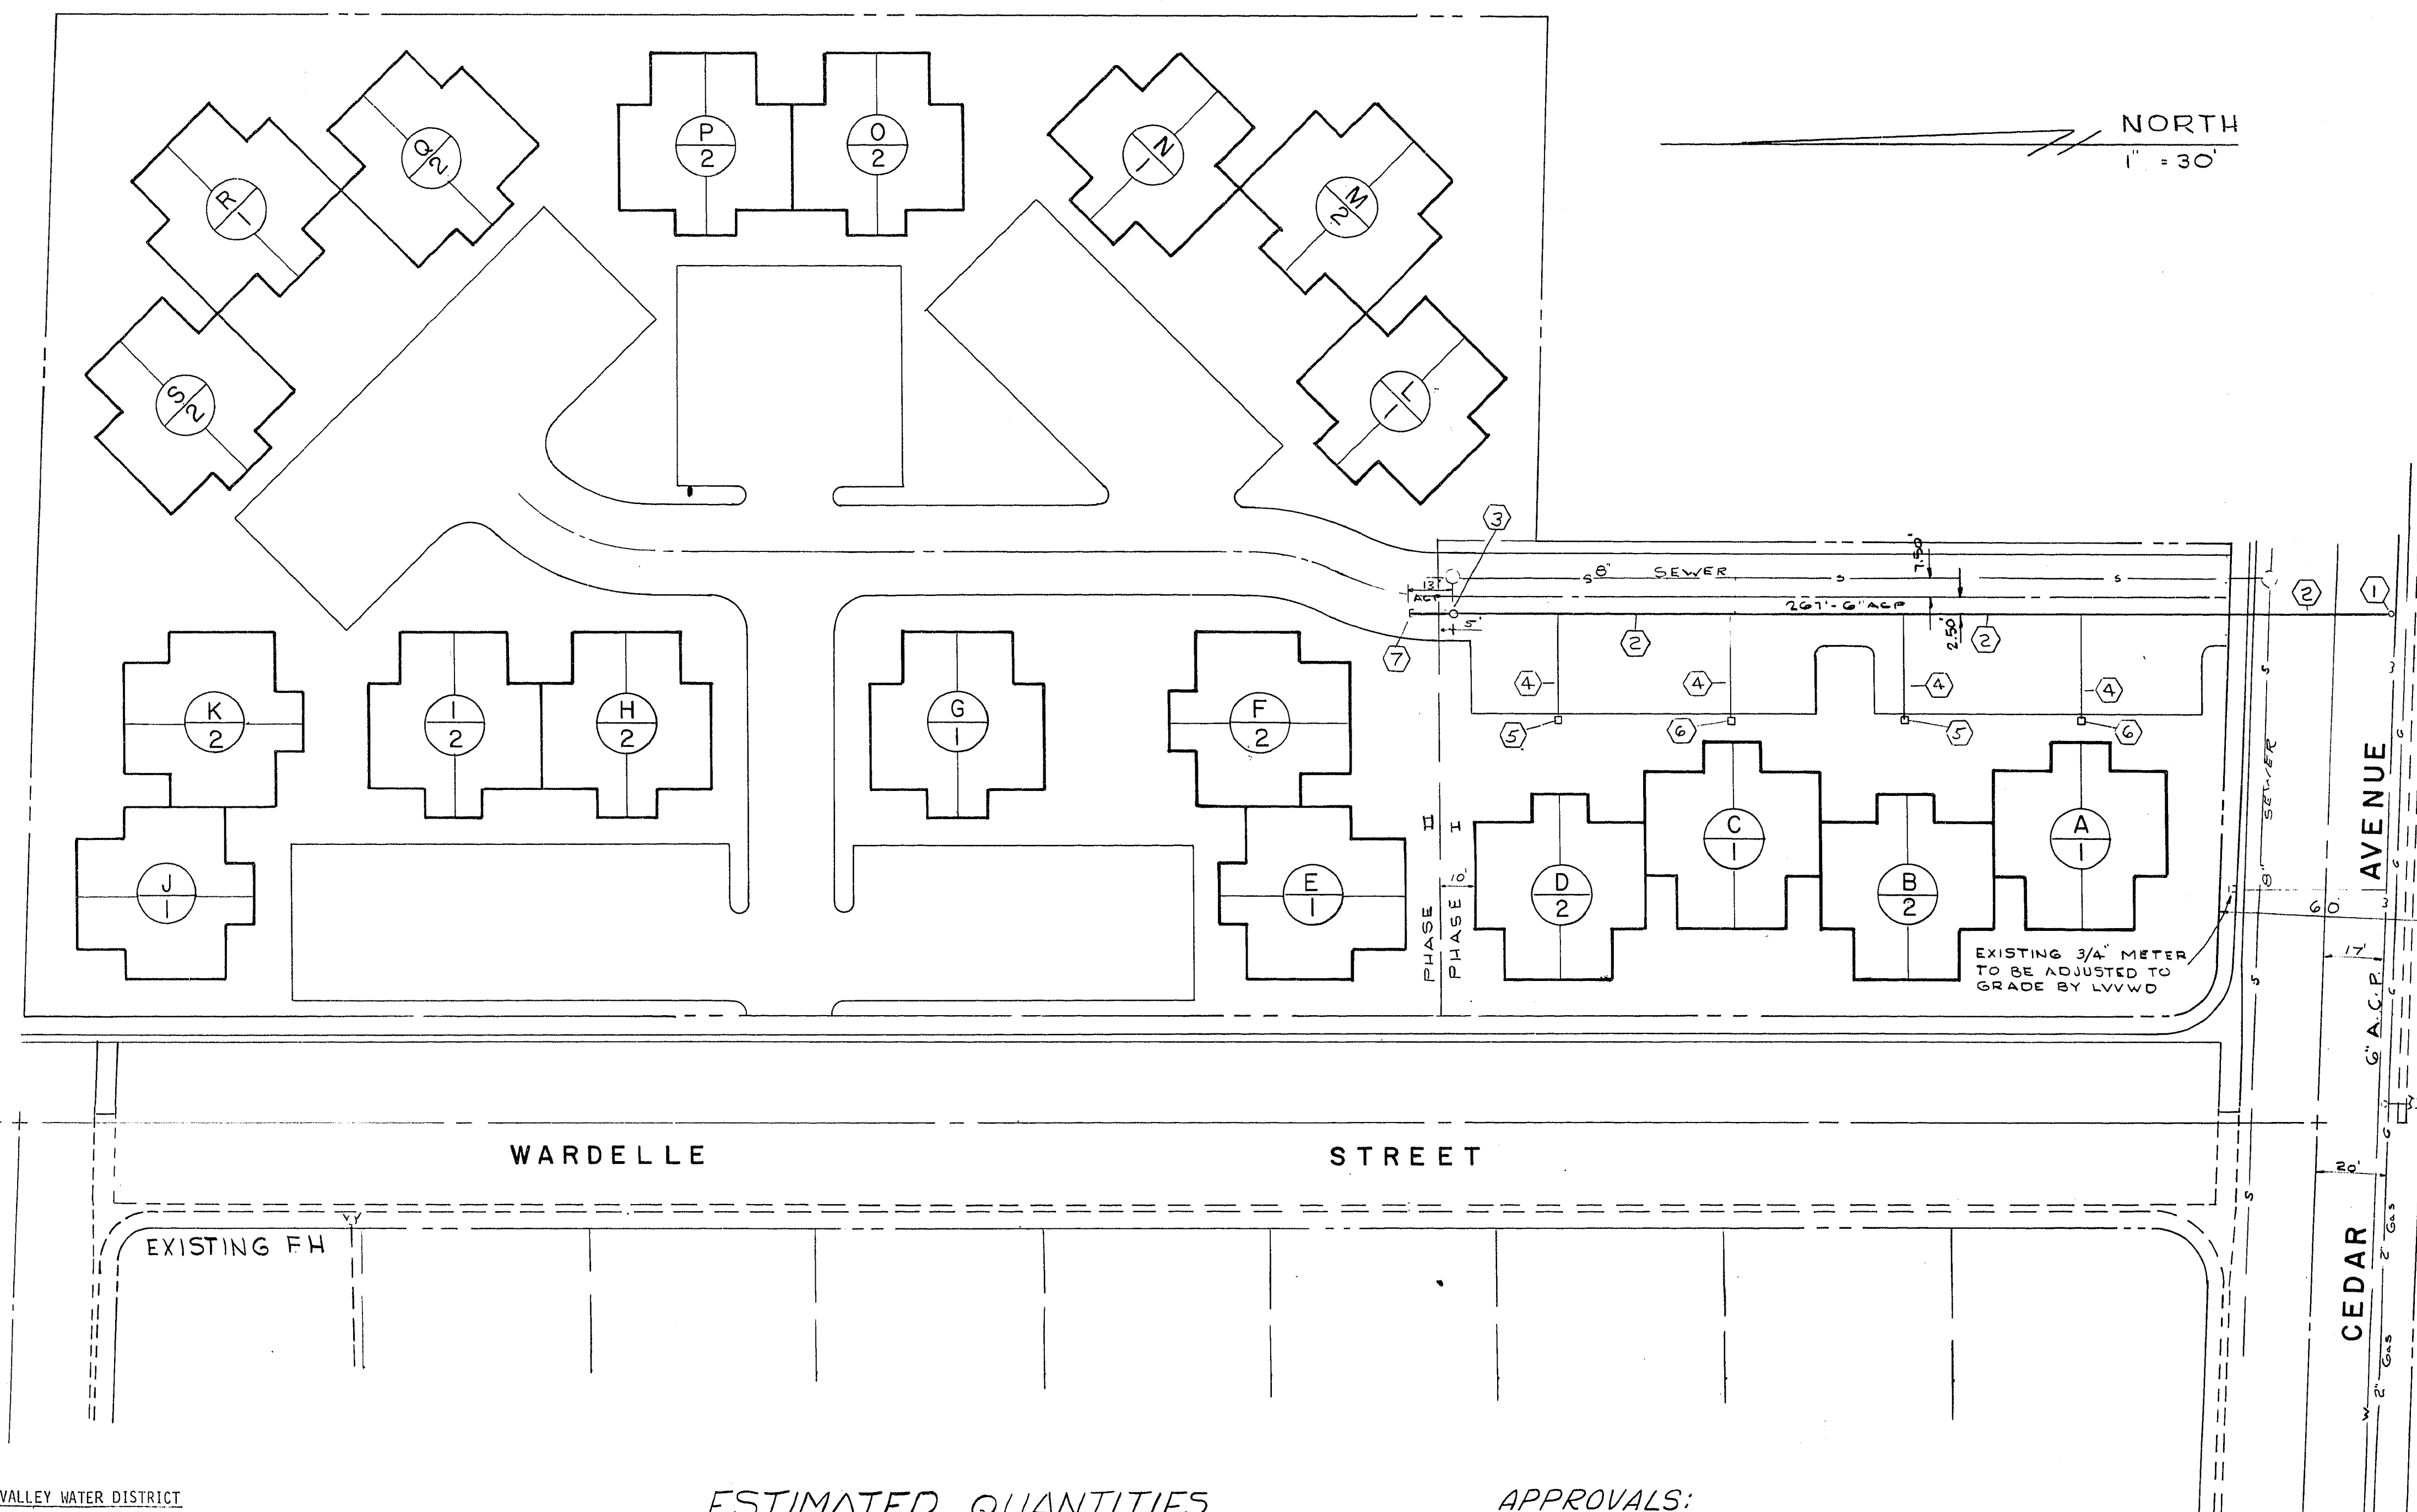


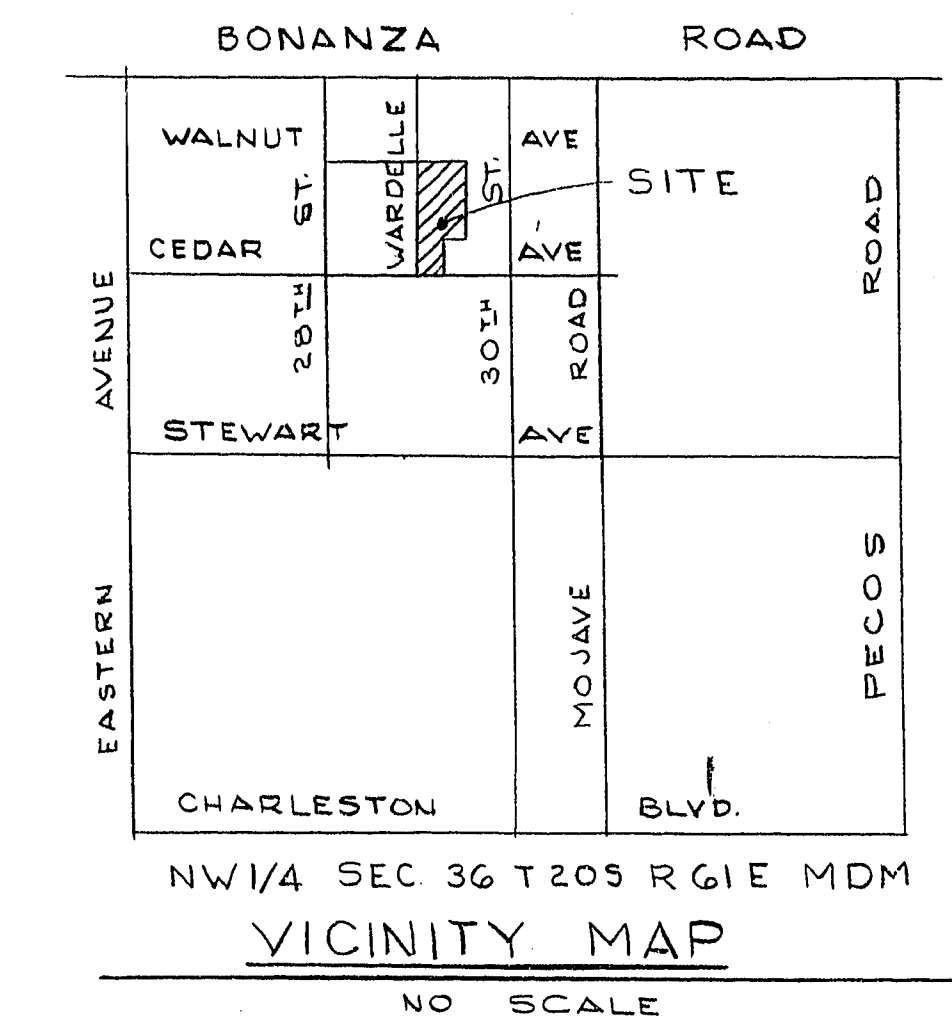

LAS VEGAS VALLEY WATER DISTRICT

ESTIMATED QUANTITIES

①	6" MECHANICAL JOINT TAPPING TEE *VALVE W/ VALVE BOX	1 EA
②	6" A.C.P.	280 LF
③	6" VALVE W/ VALVE BOX	1 EA
④	3/4" P.E. SERVICE LATERAL	120 LF
⑤	3/4" WATER METER BY LVWD	2 EA
⑥	5/8" WATER METER BY LVWD	2 EA
⑦	6" CAP W/ 2" BLOW OFF	1 EA

APPROVALS:

William Harris
CITY ENGINEER
DATE 4/28/82

Jim Long
CLV - FIRE MARSHALL
DATE 4/29/82

CLV - QUALITY CONTROL ENGINEER
DATE 4/1/82

CLV - FIELD OPERATIONS ENGINEER
DATE

Norm V. L. M.
LAS VEGAS VALLEY WATER DISTRICT
DATE 5-10-82

SUBMITTED BY:

David B. Peckham
DAVID B. PECKHAM RPE 3340
DATE 1-4-82

GENERAL NOTES

- All trenching to be done by hand where danger to existing utilities is imminent.
- Existing utilities are located on plans for the convenience of the contractor only. The contractor shall bear full responsibility for the protection of utilities and the engineer bears no responsibility for utilities not shown on plans or not in the location shown on the plans. Contractor to verify the exact location of utilities prior to construction.
- Contractor shall provide access to private property at all times during construction.
- All work shall be contained within the right-of-way or easements shown on plans.

Peckham Engineering
CONSULTING CIVIL ENGINEERS
3017 W. Charleston Blvd.
Temple Plaza, Suite 54
Las Vegas, Nev. 89102
(702) 870-4867/870-5925

CEDAR PARK I WATER PLAN

SCALE	DATE	JOB NO.	SHEET
1" = 30'	JAN '82	1-1002	4 of 5

22-6-43 5679-1025 I-II

- All work to conform to Las Vegas Valley Water District Standard Plates.
- All work, except as modified hereon or by Note No. 1, shall be done in accordance with the most current draft or edition of Uniform Standard Specifications for Public Works Construction Offsite Improvements Clark County area.
- Notice to be given Engineering Department of the Las Vegas Valley Water District 48 hours prior to actual construction.
- Service saddles or tapped collars will be required on all services; double tap collars are not permitted.
- All lines to be pressure tested to 200 psi.
- All valve boxes shall have concrete collars PER LATEST CLV STD. DWG.
- Deflection angle shall not exceed 2 1/2 degrees per 13 foot section of pipe for pipe sizes smaller than 14 inches, and shall not exceed 2 degrees for pipe sizes between 14" and 16".
- All meters shall be located outside of driveways.
- Detector tape required in accordance with Standard Plate No. 27 where indicated and as follows:
 - Over all mains not installed at 6 feet from back of curb.
 - Over all service laterals not installed at right angles to mains.
- Call Before You Dig - 800-227-2600
- FIRE HYDRANTS SHALL BE INSTALLED AND IN OPERATION WITHIN 300' OF NEW BUILDING CONSTRUCTION PRIOR TO THAT CONSTRUCTION (LVFD).

Name of Plan Cedar Park I
Water plan as shown will be acceptable. It is NOT approved for construction.
Norm V. L. M. 4-20-82
LVWD Date