

SIGNAGE AND DELINEATION LEGEND

- (A) INSTALL TYPE 4 LANE LINE DELINEATION USING TYPE "A" & "F" MARKERS PER USDOCCA STD. DWG. NO. 244A.
- (B) INSTALL WHITE LEFT TURN LANE STORAGE LINE DELINEATION USING TYPE "A" & "F" MARKERS PER USDOCCA STD. DWG. NO. 246.
- (C) INSTALL WHITE RIGHT TURN LANE STORAGE LINE DELINEATION USING 4" TYPE II FILM MARKING PER USDOCCA STD. DWG. NO. 246.
- (D) INSTALL YELLOW TYPE 1 CENTERLINE DELINEATION PER USDOCCA STD. DWG. NO. 244.
- (E) NOT USED
- (F) INSTALL YELLOW REFLECTIVE MEDIAN NOSE MARKERS PER USDOCCA STD. DWG. NO. 248.
- (FI) INSTALL WHITE REFLECTIVE MEDIAN NOSE MARKERS PER USDOCCA STD. DWG. NO. 248.
- (G) INSTALL 24" WIDE STOP BAR USING WHITE COLD POLYMER FILM.
- (H) INSTALL 10" WIDE CROSSWALK USING WHITE COLD POLYMER FILM. SEE TYPICAL DETAIL ON SHEET T1.
- (I) INSTALL "ARROWS" AND "ONLY" USING WHITE COLD POLYMER FILM.
- (J) INSTALL 24" WIDE CHEVRONS PER USDOCCA STD. DWG. NO. 245.
- (JI) INSTALL 24" WIDE DIAGONALS PER USDOCCA STD. DWG. NO. 245.
- (K) INSTALL 4" TYPE II FILM MARKING.

STREET LIGHTING LEGEND

- (1) INSTALL STREET LIGHT POLE AND FOUNDATION WITH 250w LUMINAIRE PER USDOCCA STD. DWG. NO. 314. USE 1 1/4" CONDUIT WHEN CONNECTING TO EXISTING 1 1/4" CONDUIT.
- (2) EXISTING STREET LIGHT POLE, FOUNDATION & LUMINAIRE TO REMAIN.
- (3) INSTALL STREET LIGHT POLE AND FOUNDATION WITH 250w LUMINAIRE PER DETAIL ON DWG D4.
- (4) INSTALL NO. 3-1/2 STREET LIGHT PULL BOX PER USDOCCA STD. DWG. NO. 326.
- (5) INTERCEPT EXISTING CONDUIT AND INSTALL PULLBOX. SEE NOTE 4. CONTRACTOR TO VERIFY LOCATION AND DEPTH OF CONDUIT IN THE FIELD.
- (6) INSTALL P-30 INTERCONNECT CONDUIT PULL BOX AT 500' MAXIMUM SPACING.
- (7) SEE TRAFFIC SIGNAL UNDERGROUND PLANS FOR INSTALLATION OF INTERSECTION LUMINAIRES.
- (8) INSTALL STREET LIGHT POLE AND FOUNDATION WITH 150w LUMINAIRE PER USDOCCA STD. DWG. NO. 314.
- (9) INSTALL TYPE 200 INTERCONNECT CONDUIT PULL BOX
- (10) INTERCEPT EXISTING CONDUIT STUBOUTS (FIELD VERIFY LOCATION AND DEPTH OF CONDUIT)
- (11) INSTALL LVVMD PULL BOX, SEE DETAIL ON W7


WIRING AND CONDUIT LEGEND

- (1) INSTALL 2" CONDUIT WITH (2) #4 & (1) #8
- (2) INSTALL 2" CONDUIT ONLY
- (3) INSTALL 4" INTERCONNECT CONDUIT WITH #8 GREEN WIRE FOR PULL STRING.
- (4) INSTALL 3" CONDUIT WITH (3) 3/0
- (5) INSTALL 2" CONDUIT WITH (2) #4 & (1) #8
- (6) INSTALL 2" CONDUIT WITH (2) #4 & (1) #8. TAPE ENDS FOR FUTURE RECIRCUITING.
- (7) INSTALL 2" CONDUIT WITH (4) #4 & (1) #8
- (8) INSTALL 2-4" LVVMD FIBER OPTIC CONDUIT, SEE DETAIL ON T5

NOTES

- 1. ALL WORK TO BE DONE IN ACCORDANCE TO THE UNIFORM STANDARD DRAWINGS AND SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION OFF-SITE IMPROVEMENTS CLARK COUNTY AREA NEVADA AS ADOPTED BY THE CITY OF LAS VEGAS.
- 2. ALL STREET LIGHTING WIRE SHALL BE COPPER WITH THW INSULATION.
- 3. ALL PULLBOXES ARE NO. 3-1/2 UNLESS NOTED OTHERWISE.
- 4. FIELD VERIFY EXISTING UNDERGROUND CONDUIT AND PULLBOXES. UTILIZE EXISTING CONDUIT WHERE POSSIBLE AND INSTALL NEW CONDUIT AS REQUIRED PER PLANS.
- 5. SEE NOTE 17 ON SHEET T1 FOR CONDUIT NOTES.

ALL LANE DIMENSIONS ARE FROM FACE OF MEDIAN CURB TO LIP OF GUTTER OR EDGE OF A.C.

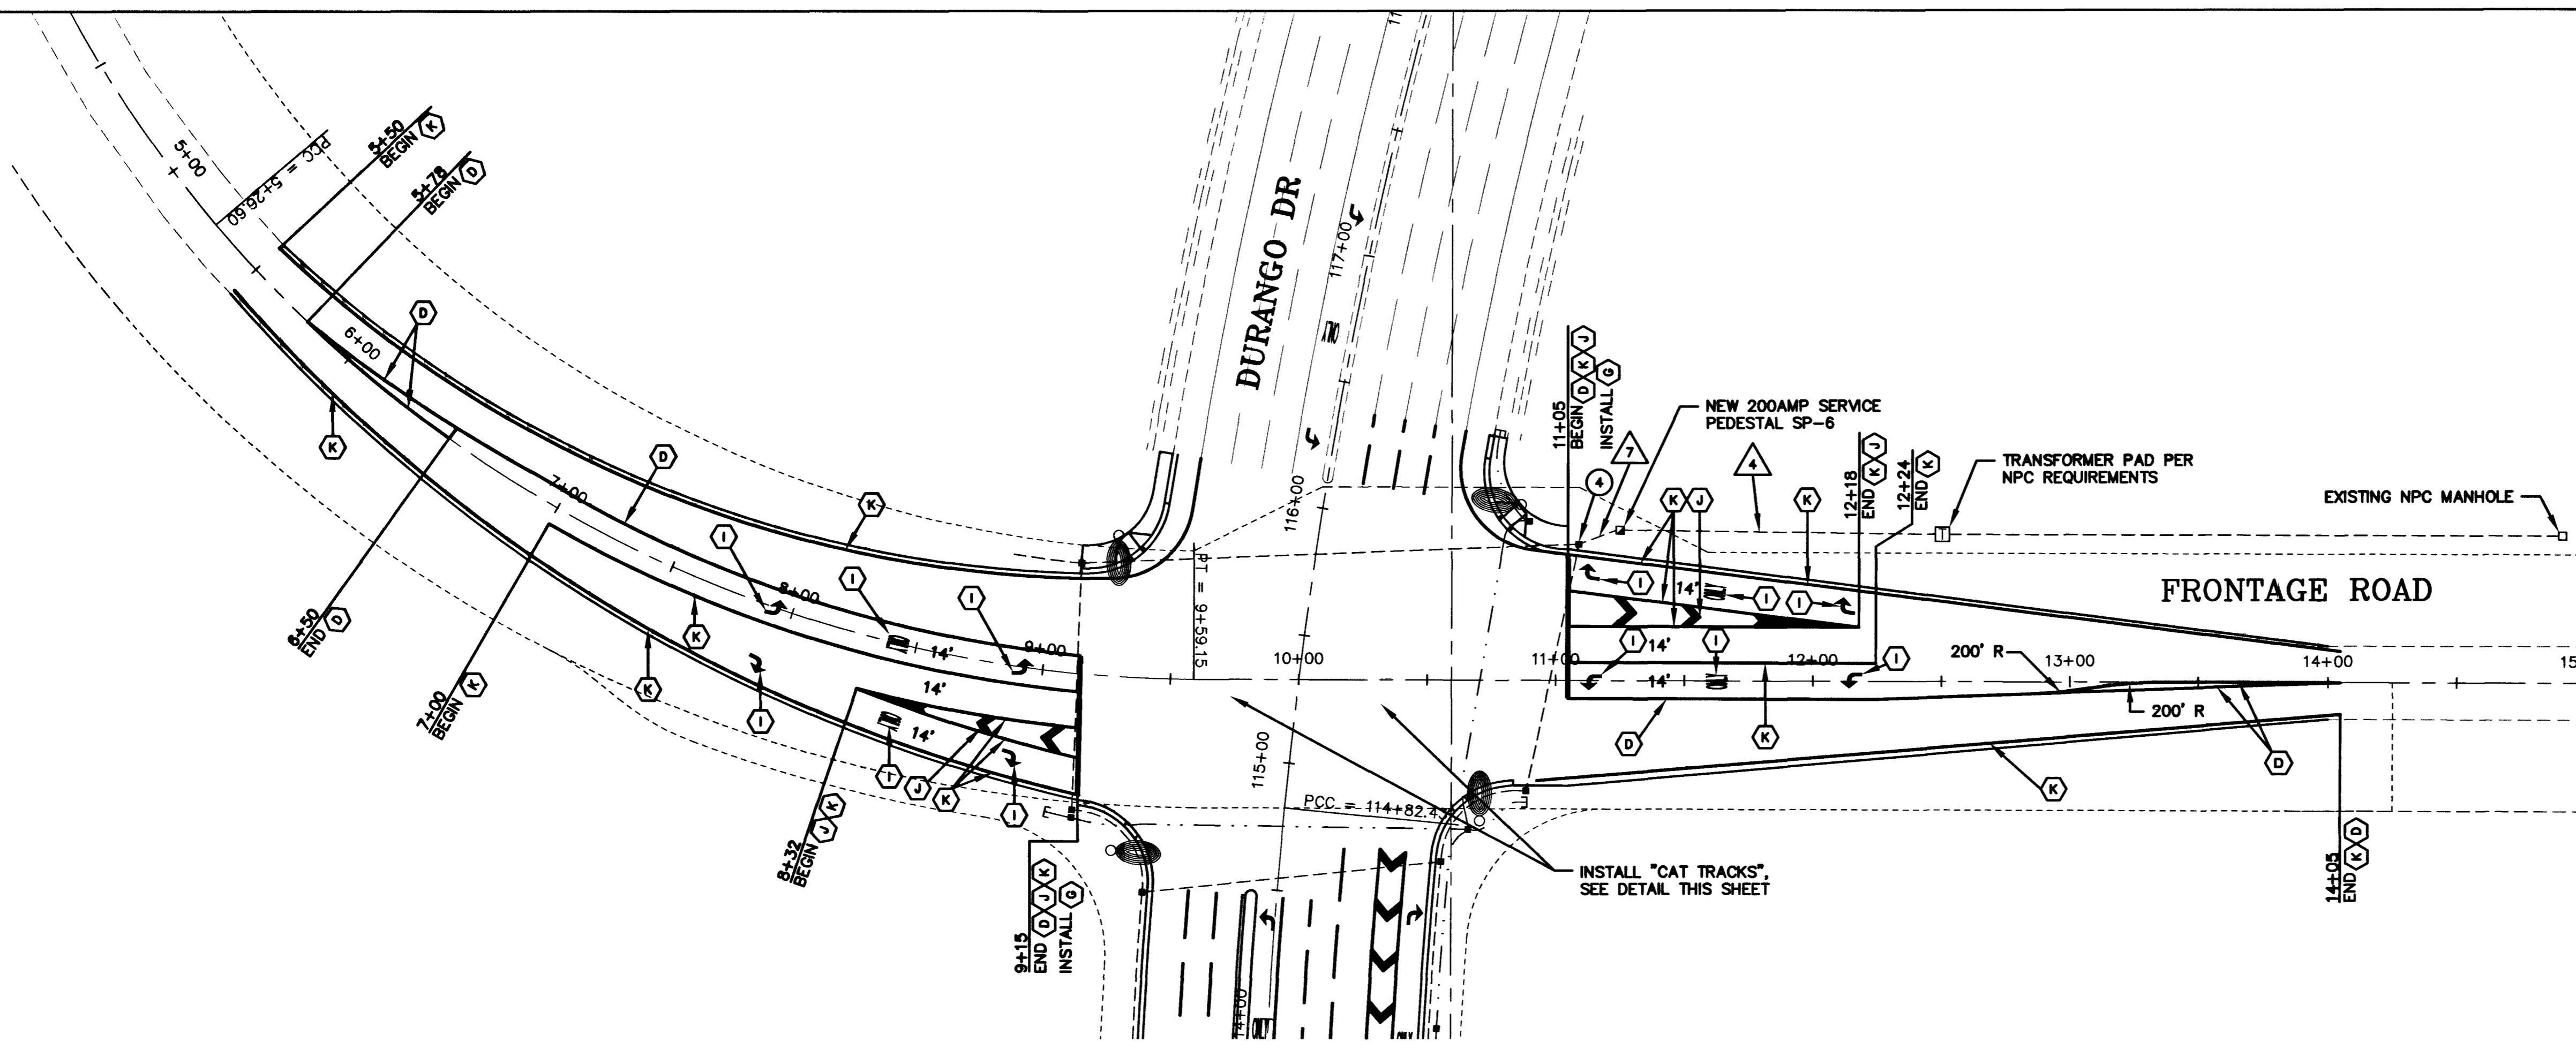

DEPARTMENT OF PUBLIC WORKS
CITY OF LAS VEGAS


CONSULTING ENGINEERS • PLANNERS • LAND SURVEYORS
2727 SOUTH RAINBOW BOULEVARD
LAS VEGAS, NEVADA 89146-5148 PHONE (702) 873-7550 FAX (702) 362-2997

vtn nevada


| REV | DATE | BY | REVISION |
|-----|------|----|----------|
| | | | |

STRIPING AND STREET LIGHTING PLAN
STA. 5+00.00 TO STA. 15+00.00
FRONTAGE ROAD

PROJECT
DURANGO DRIVE IMPROVEMENTS
I-215 TO US 95

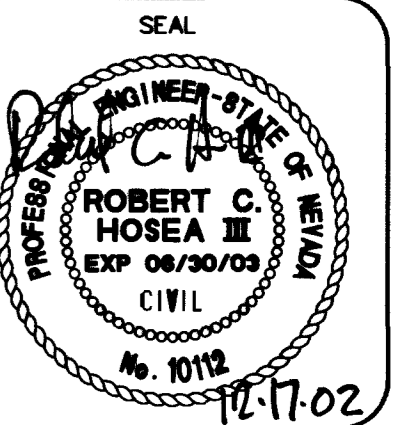

| | |
|---------|---------------------------|
| NO. NO. | 5678 |
| BY | LMW |
| DATE | 11/27/02 |
| SCALE | HORIZ. 1"=40' VERT. NA |
| DRAWING | T9 |
| SHEET | 69 |
| OF | 80 |

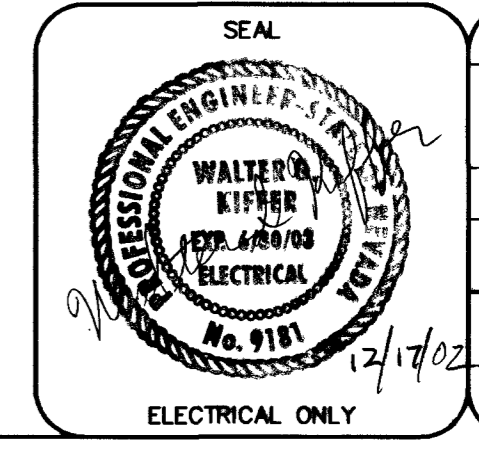

PS "PLOT" USING "PLOT-FRONT"
I:\CAD\PLANS\5678\5678-T.DWG