


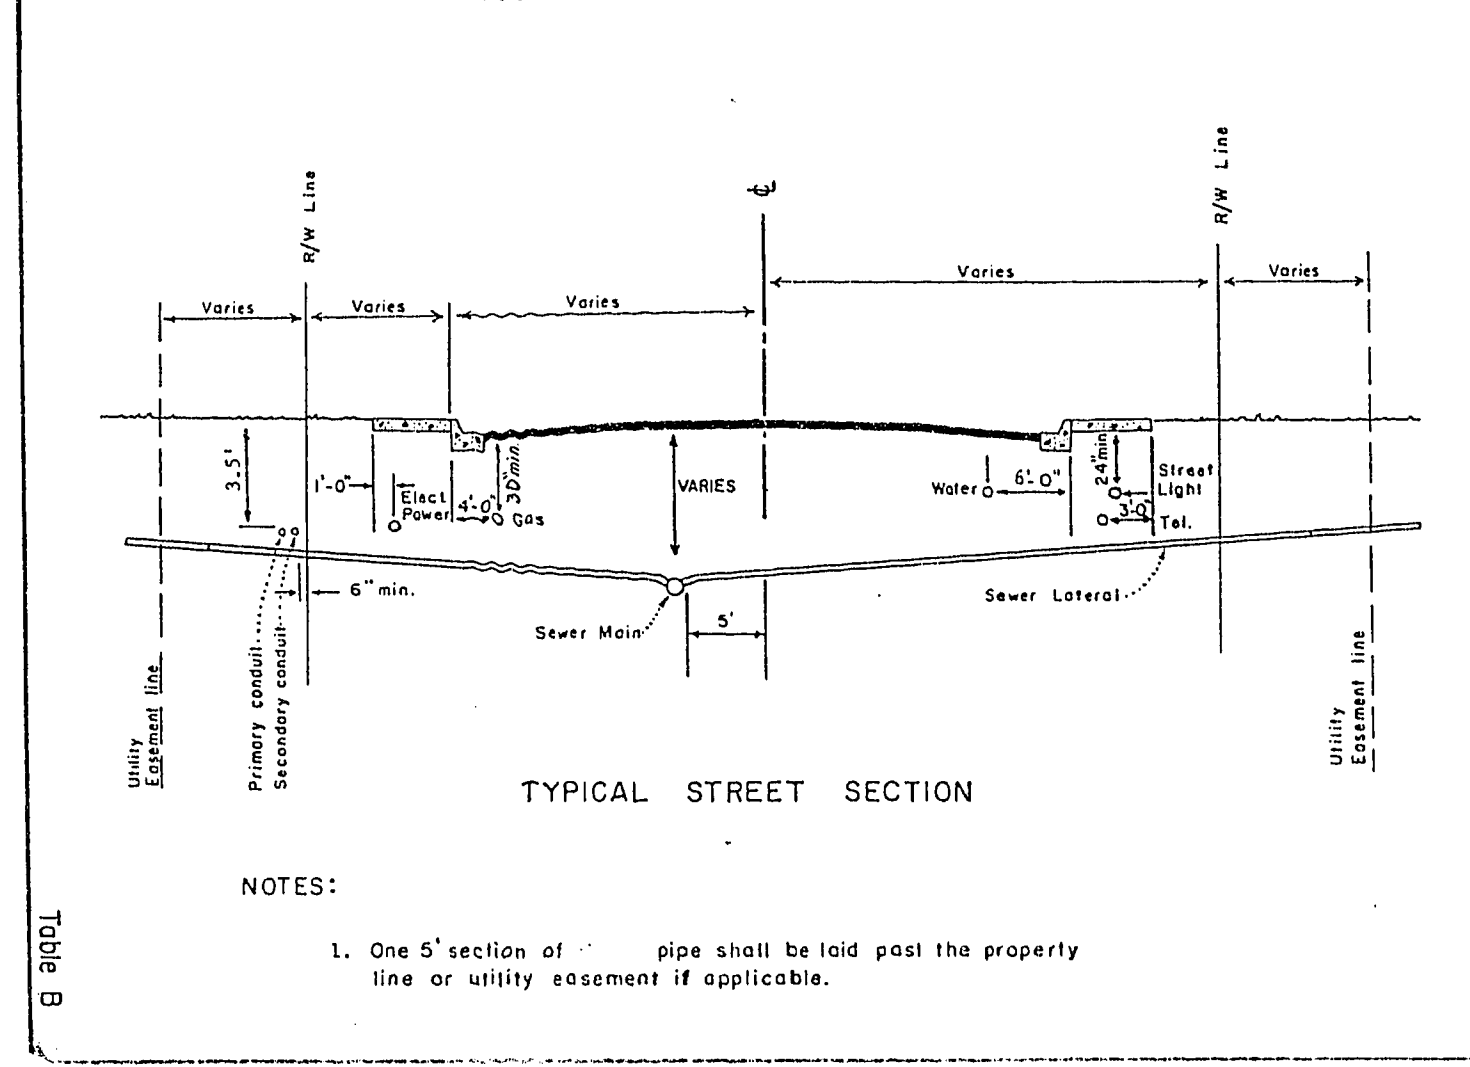


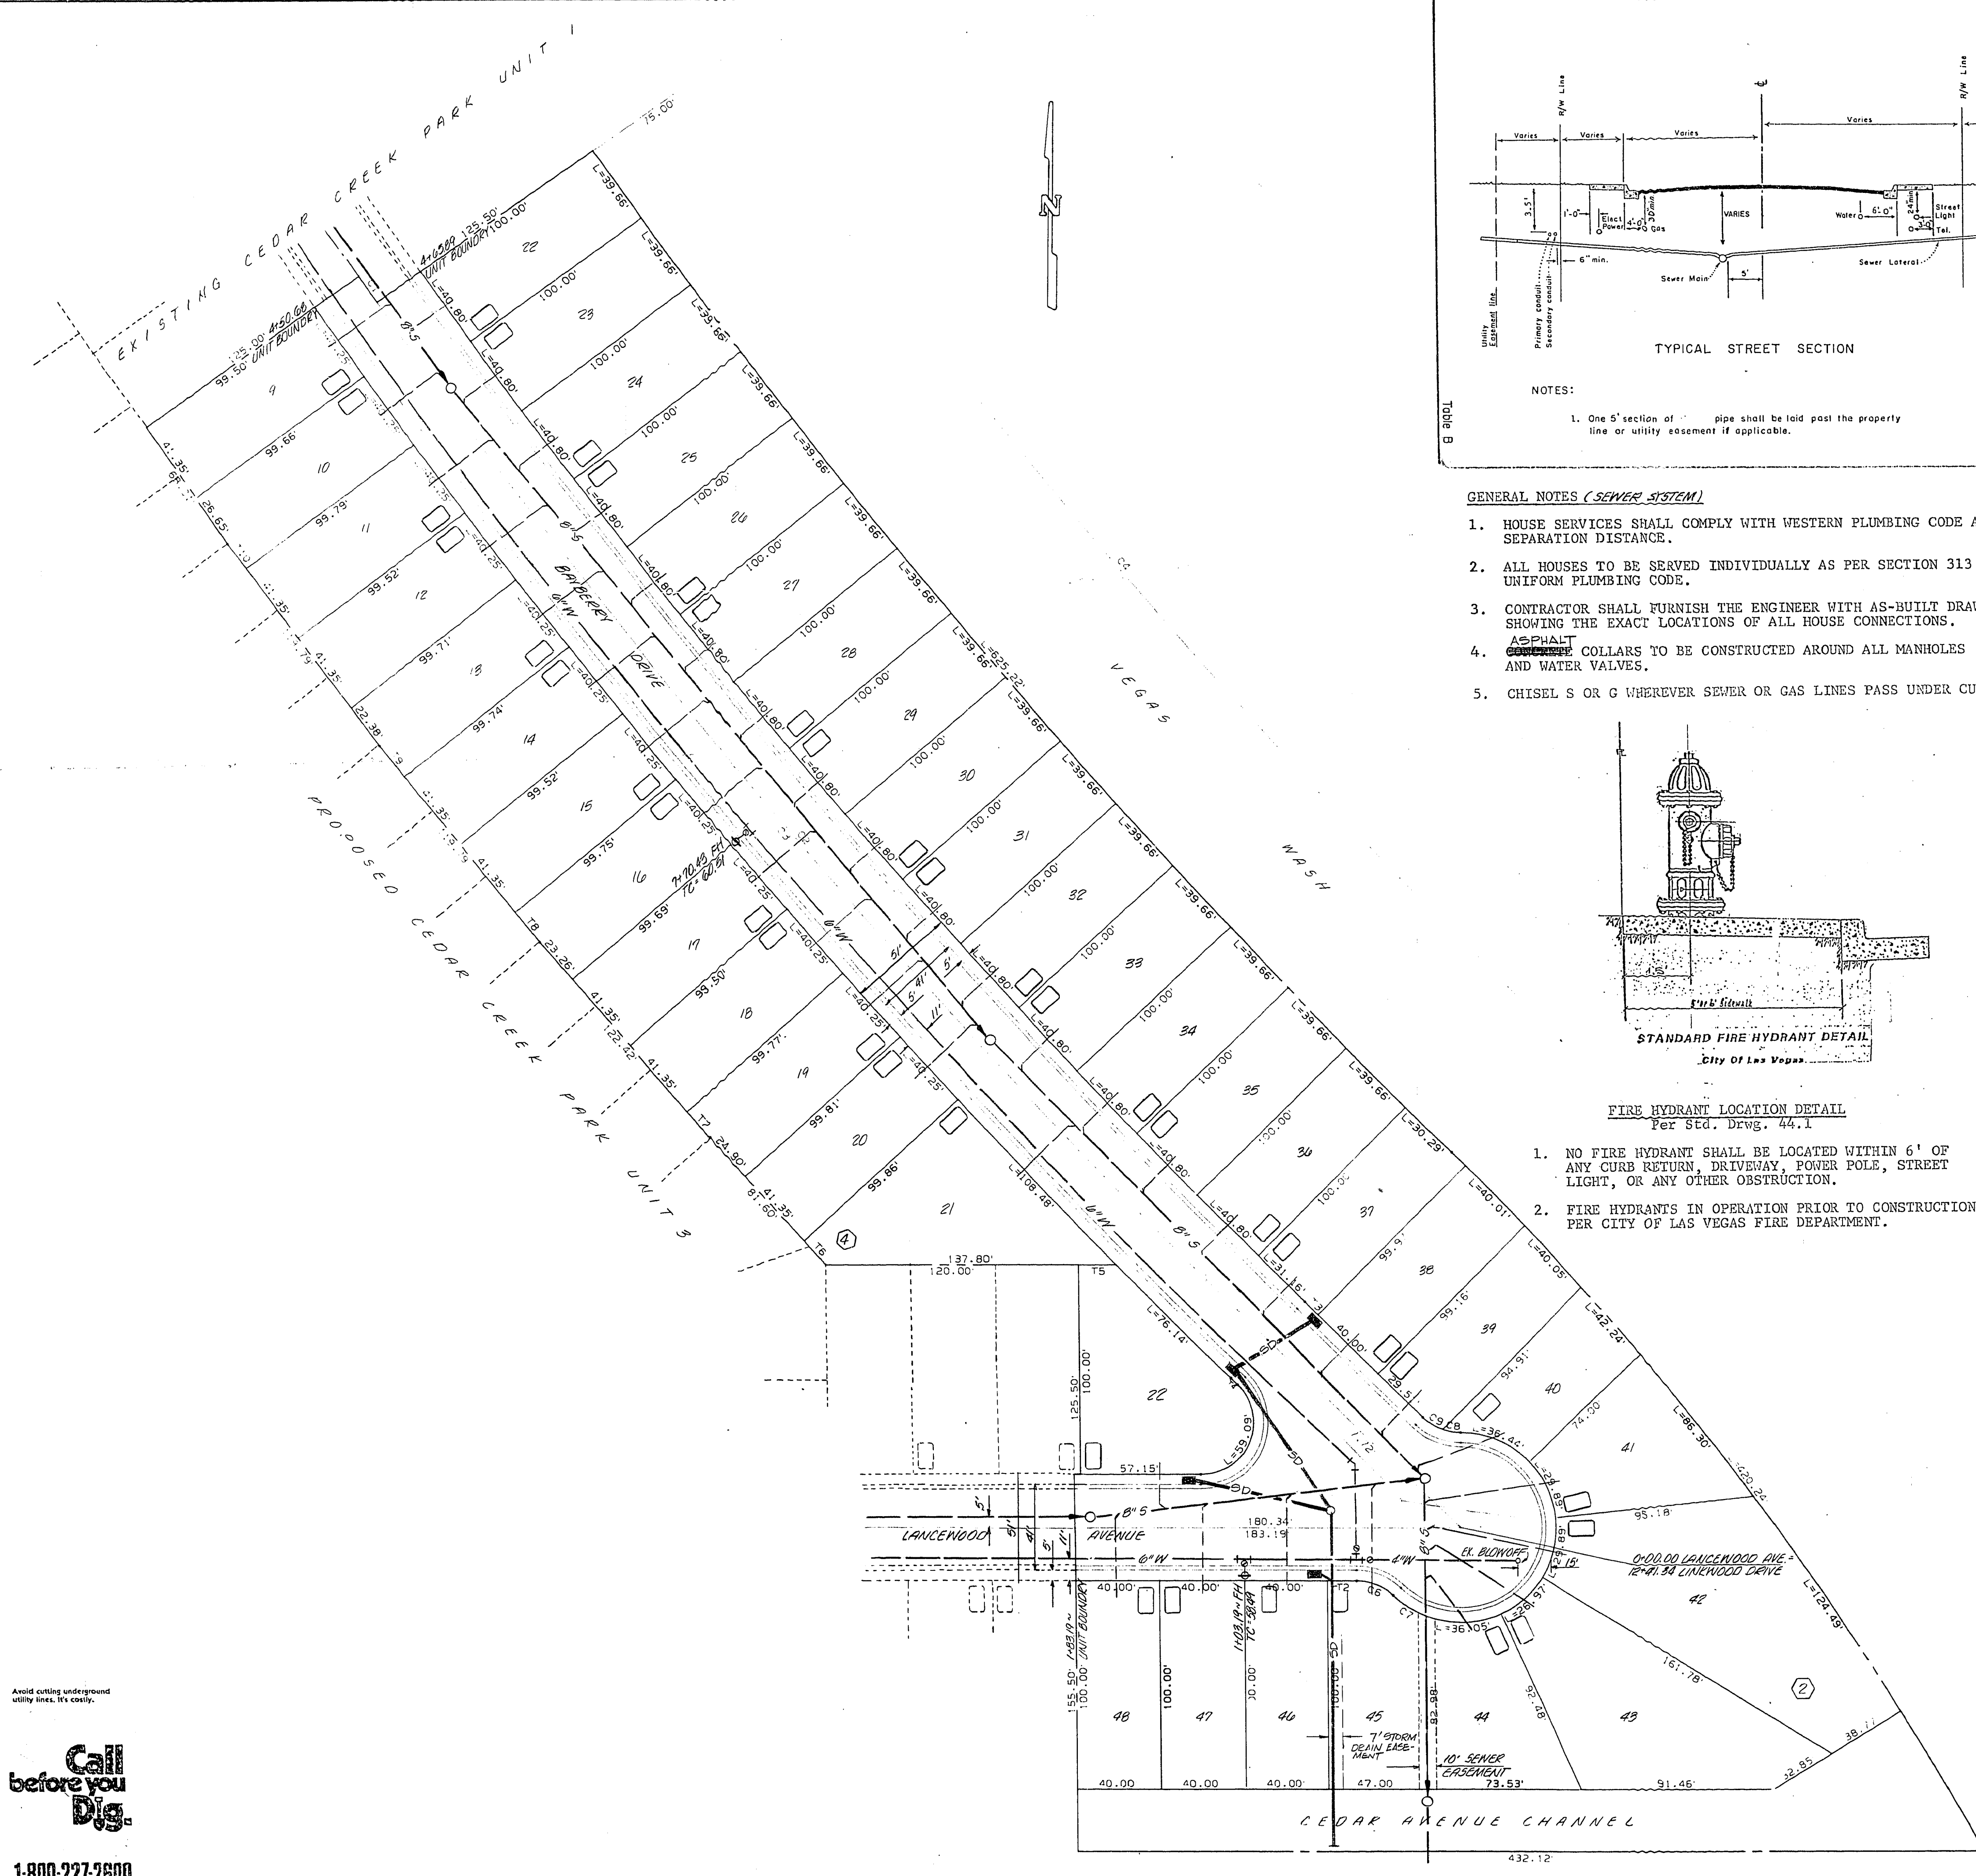

- GENERAL NOTES (SEWER SYSTEM)**
- HOUSE SERVICES SHALL COMPLY WITH WESTERN PLUMBING CODE AS THE SEPARATION DISTANCE.
 - ALL HOUSES TO BE SERVED INDIVIDUALLY AS PER SECTION 313 OF THE UNIFORM PLUMBING CODE.
 - CONTRACTOR SHALL FURNISH THE ENGINEER WITH AS-BUILT DRAWINGS SHOWING THE EXACT LOCATIONS OF ALL HOUSE CONNECTIONS.
 - ASPHALT COLLARS TO BE CONSTRUCTED AROUND ALL MANHOLES AND WATER VALVES.
 - CHISEL S OR G WHEREVER SEWER OR GAS LINES PASS UNDER CURB.

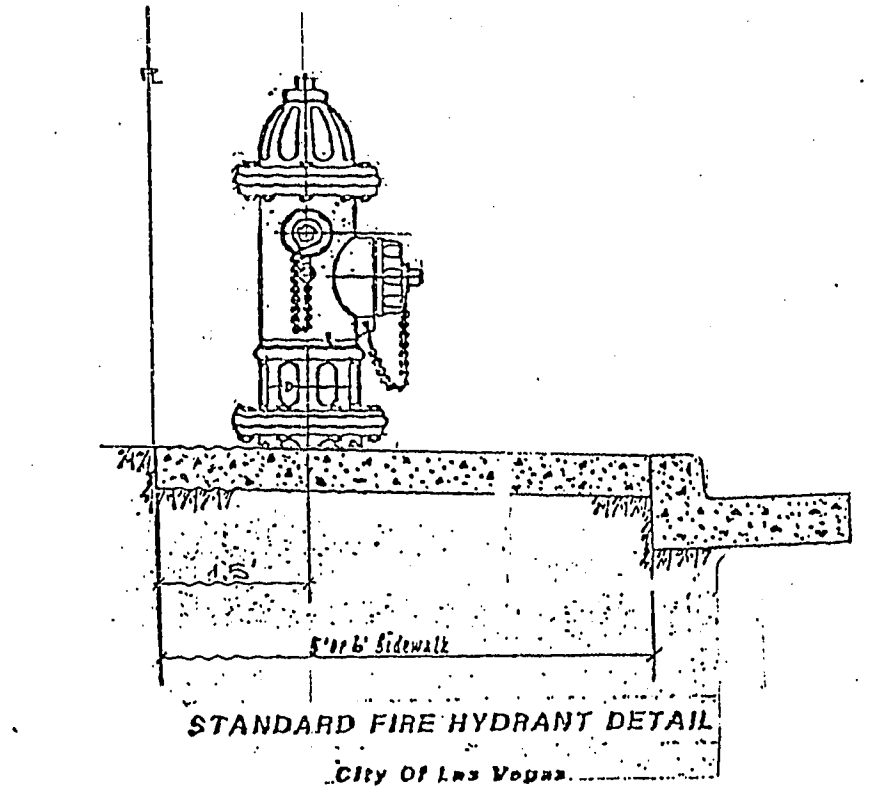

- FIRE HYDRANT LOCATION DETAIL**
Per Std. Draw. 44.1
- NO FIRE HYDRANT SHALL BE LOCATED WITHIN 6' OF ANY CURB RETURN, DRIVEWAY, POWER POLE, STREET LIGHT, OR ANY OTHER OBSTRUCTION.
 - FIRE HYDRANTS IN OPERATION PRIOR TO CONSTRUCTION PER CITY OF LAS VEGAS FIRE DEPARTMENT.

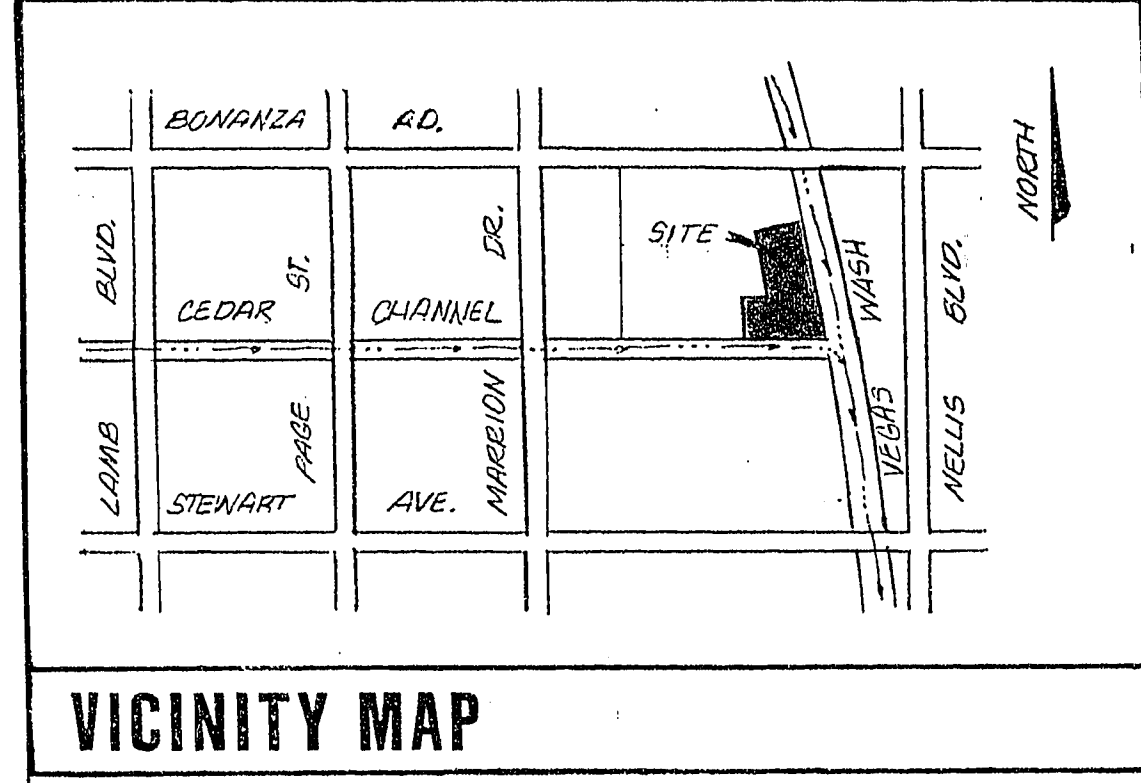

- LAS VEGAS VALLEY WATER DISTRICT NOTES**
- ALL WORK TO CONFORM TO LAS VEGAS VALLEY WATER DISTRICT STANDARD PLATES.
 - ALL WORK, EXCEPT AS MODIFIED HEREON BY NOTE NO. 1, SHALL BE DONE IN ACCORDANCE WITH THE MOST CURRENT DRAFT OR EDITION OF UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION OFF-SITE IMPROVEMENTS, CIVIL COUNTY AREA.
 - NOTICE TO BE GIVEN ENGINEERING DEPARTMENT OF THE LAS VEGAS VALLEY WATER DISTRICT 48 HOURS PRIOR TO ACTUAL CONSTRUCTION.
 - SERVICE SADDLES OR TAPPED COLLARS WILL BE REQUIRED ON ALL SERVICES. DOUBLE TAP COLLARS ARE NOT PERMITTED.
 - ALL LINES TO BE PRESSURE TESTED TO 200 PSI.
 - ALL VALVE BOXES SHALL HAVE CONCRETE COLLARS AT SURFACE OF PAVED AREAS.
 - DEFLECTION ANGLE SHALL NOT EXCEED 1/4 DEGREE PER 13 FOOT SECTION OF PIPE FOR PIPE SIZES SMALLER THAN 14\"/>

- GENERAL NOTES**
- ALL SEWER LATERALS ARE EXISTING TO 5' PAST IE.
 - A DOUBLE STRAP BRONZE SERVICE SADDLE OR ASBESTOS CEMENT FACTORY TAPPED COLLAR AND CORRUPTION STOP EXIST FOR EACH WATER SERVICE.
 - ALL SEWER AND WATER MAINS, MANHOLES, VALVES, AND FIRE HYDRANTS WERE BUNDLED FOR AND CONSTRUCTED WITH CEDAR CREEK PARK UNITS 1 & 4.
 - IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO PROTECT EXISTING SEWER AND WATER MAINS, MANHOLES, LATERALS, VALVES, AND HYDRANTS.
 - MANHOLE RIMS REQUIRING ADJUSTMENT SHALL CONFORM TO THE ELEVATIONS SHOWN ON SHEET 3 OF 6 AND 4 OF 6.

- LEGEND AND QUANTITIES ESTIMATE**
- 5/8\"/>

Signature
C.L.V. FLOOD CONTROL & LAND DEVELOPMENT
DATE 11/21/83

NOTE: 1. WATER MAIN WAS CONSTRUCTED WITH EXISTING UNIT #4. SEE C.L.V. DRAWING NO 567-Y-1020-4.
2. SEWER MAIN WAS CONSTRUCTED WITH EXISTING UNIT #1. SEE C.L.V. DRAWING NO 307-Y-1020-1.

CONSULTING ENGINEERS		PROJECT	
2800 WEST SAHARA AVENUE		BUILT	
LAS VEGAS, NEVADA 89102		PHONE	
neveda		UNIT 2	
MASTER SEWER AND WATER PLAN		CEDAR CREEK PARK	
UNIT 2		UNIT 2	
WO NO 5032-2		BY VCB	
DATE JUNE, 1983		SCALE 1\"/>	
SHEET		5	
OF 6 SHEETS		3074.1020-2	

Call before you Dig.
1-800-227-2600
UNDERGROUND SERVICE (USA)