



DURANGO DRIVE ITS INFRASTRUCTURE

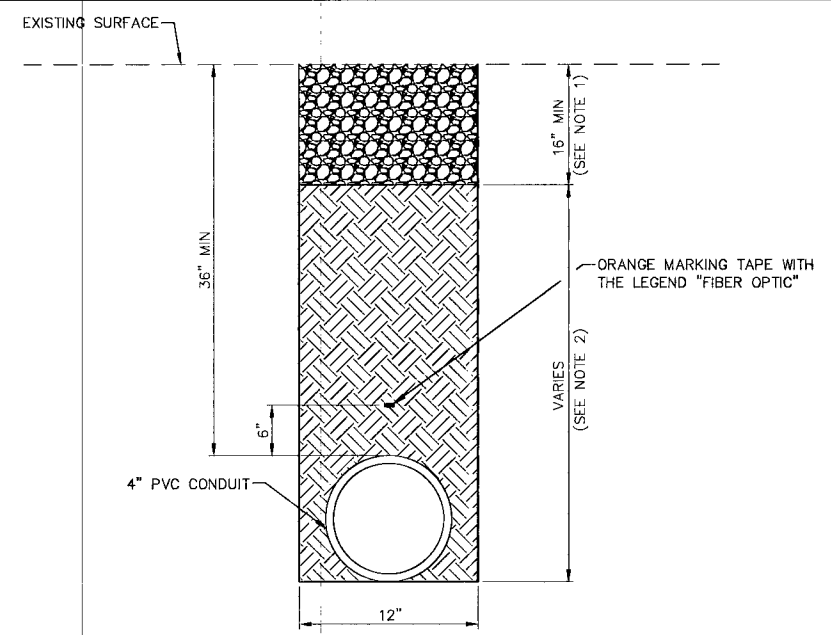


- NOTES:
1. BASE AGGREGATE (AS PER NDOT SPECIFICATIONS; SECTION 704). A MINIMUM OF 16 INCHES TO BE LAID IN MAXIMUM 8 INCH LOOSE LIFTS. 95% COMPACTION REQUIRED.
 2. BACKFILL WITH SELECT MATERIAL TO BOTTOM OF BASE AGGREGATE (AS PER NDOT SPECIFICATIONS; SECTION 207). 90% COMPACTION REQUIRED.

CONDUIT TRENCH DETAIL IN UNPAVED AREAS WITHIN NDOT RIGHT-OF-WAY

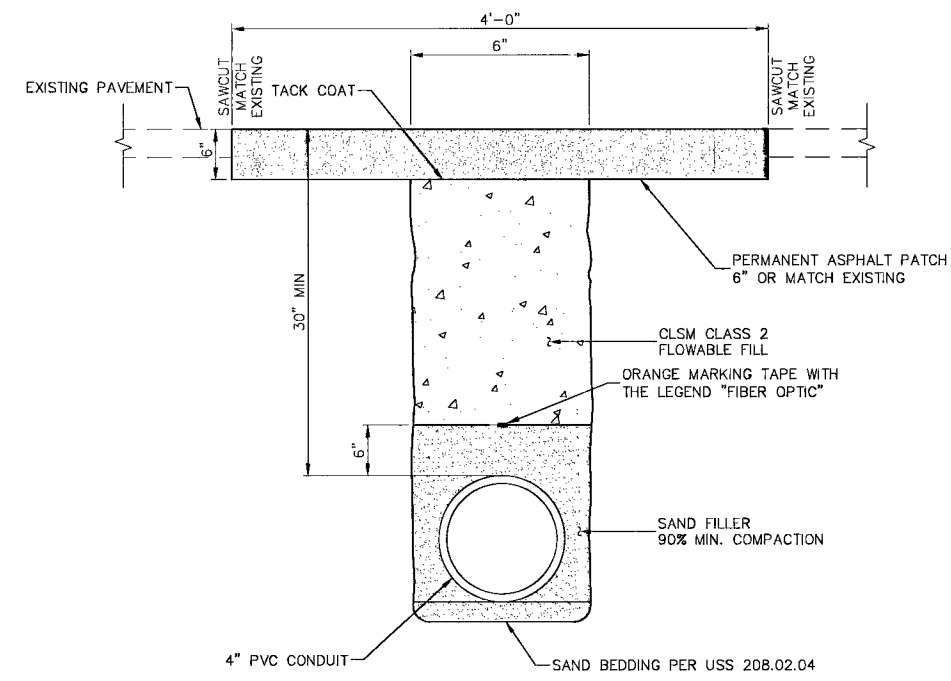

TRANSVERSE CONDUIT TRENCH DETAIL

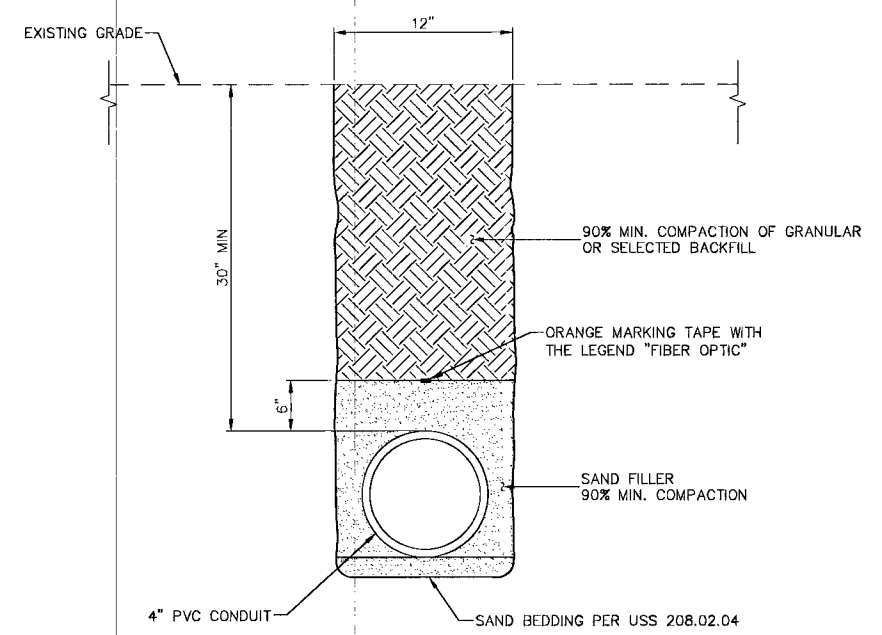

CONDUIT TRENCH DETAIL IN UNPAVED AREAS


107V5212-F1B

REV. NO.	DATE	DESCRIPTION	APPROVED

DURANGO DRIVE ITS INFRASTRUCTURE

TRENCH DETAILS

REGIONAL TRANSPORTATION COMMISSION OF SOUTHERN NEVADA



PROJECT No: 398-A240-3 DRAWN BY: JAS
 DESIGNED BY: JDM CHECKED BY: JSR
 APPROVED BY: _____

G.C. WALLACE COMPANIES
 ENGINEERS | PLANNERS | SURVEYORS
 6635 S. CIMARRON ROAD - LAS VEGAS, NV 89113
 T: 702.804.2000 F: 702.804.2299 GCWALLACE.COM

SCALE	4500094823-402-04
HORIZ: NONE	DRAWING NO.
VERT: NONE	DU-19
FIELD BOOK	
H34022	
SHT. 22 OF 26	

117039