

QUANTITY ESTIMATE

Number	Item	Amount
	5" ACP Water Line	1437LF
	5" CIP " "	120LF
	8" ACP " "	1700LF
①	6"x6" Tee	5
②	6"x6" Tee	4
③	6"x6" 90° Ell	1
④	6"x8" 90° Ell	1
⑤	6" Gate Valve & Box	13
⑥	6" Topping Gate Valve	1
⑦	8" Gate Valve & Box	3
⑧	6" Fire Hydrant	5
⑨	6" Cap	3
⑩	5" Cap	1
⑪	1 1/2" Blow-off Valve	2
⑫	Water Services 3/4" COB	54

NOTE: Hydrants on 51'±60' R/W Streets to be located back of sidewalk in 3' utility easement. Hydrant to be set in center of 3'x5'x4" concrete pad.

ALL WATER SERVICE LINES ARE 3/4" COPPER WITH 5/8"x3/4" WATER METERS.

Engineer: W. T. de Valcourt, Jr.
W. T. de Valcourt, Jr. R.C.E. 1816

Approved: B. Williams 5/6/64
Chief - C.L.V.F.D.

Approved: _____
Las Vegas Valley Water Dist.

Approved: B. J. ... 6-22-64
City Engineer

LAS VEGAS VALLEY WATER DISTRICT

By: W. T. de Valcourt, Jr. Date: 5/10/64
THIS SIGNATURE IS NOT AN OFFICIAL APPROVAL. IT INDICATES ONLY THAT THE TRACING WAS IN ACCORDANCE WITH THE APPROVED PRINT AT TIME OF SIGNATURE.


NO.	DATE	REVISIONS	BY	CK	APPROVAL
1	5/10/64	Moved Carey Ave. Sewer 25' South	W.T.	R.C.E.	

BUSINESS ENGINEERING ARCHITECTURE MANAGEMENT, INC.
LAS VEGAS, NEVADA

COLLEGE HEIGHTS #6
DOMESTIC WATER PLAN

beam, inc.

DRAWING NO. 567Y-1110-60

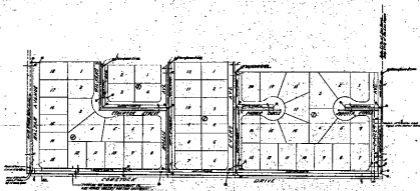

Relative Location



NOTE: All fixtures are STANDARD unless otherwise specified. All plumbing is to be installed in accordance with the latest plumbing code of the local authority having jurisdiction. All piping shall be of the type and size specified on the drawings.

Prepared by W. C. K. Smith
 U.S. ARCHITECTURAL SERVICE
 Approved by W. C. K. Smith W. C. K.
 U.S. ARCHITECT
 Checked by W. C. K. Smith
 U.S. ARCHITECT

BEAM, INC. 1225 N. 10th St. Phoenix, Arizona 85004 Phone: 254-1111	BEAM, INC. 1225 N. 10th St. Phoenix, Arizona 85004 Phone: 254-1111
BEAM, INC. 1225 N. 10th St. Phoenix, Arizona 85004 Phone: 254-1111	