



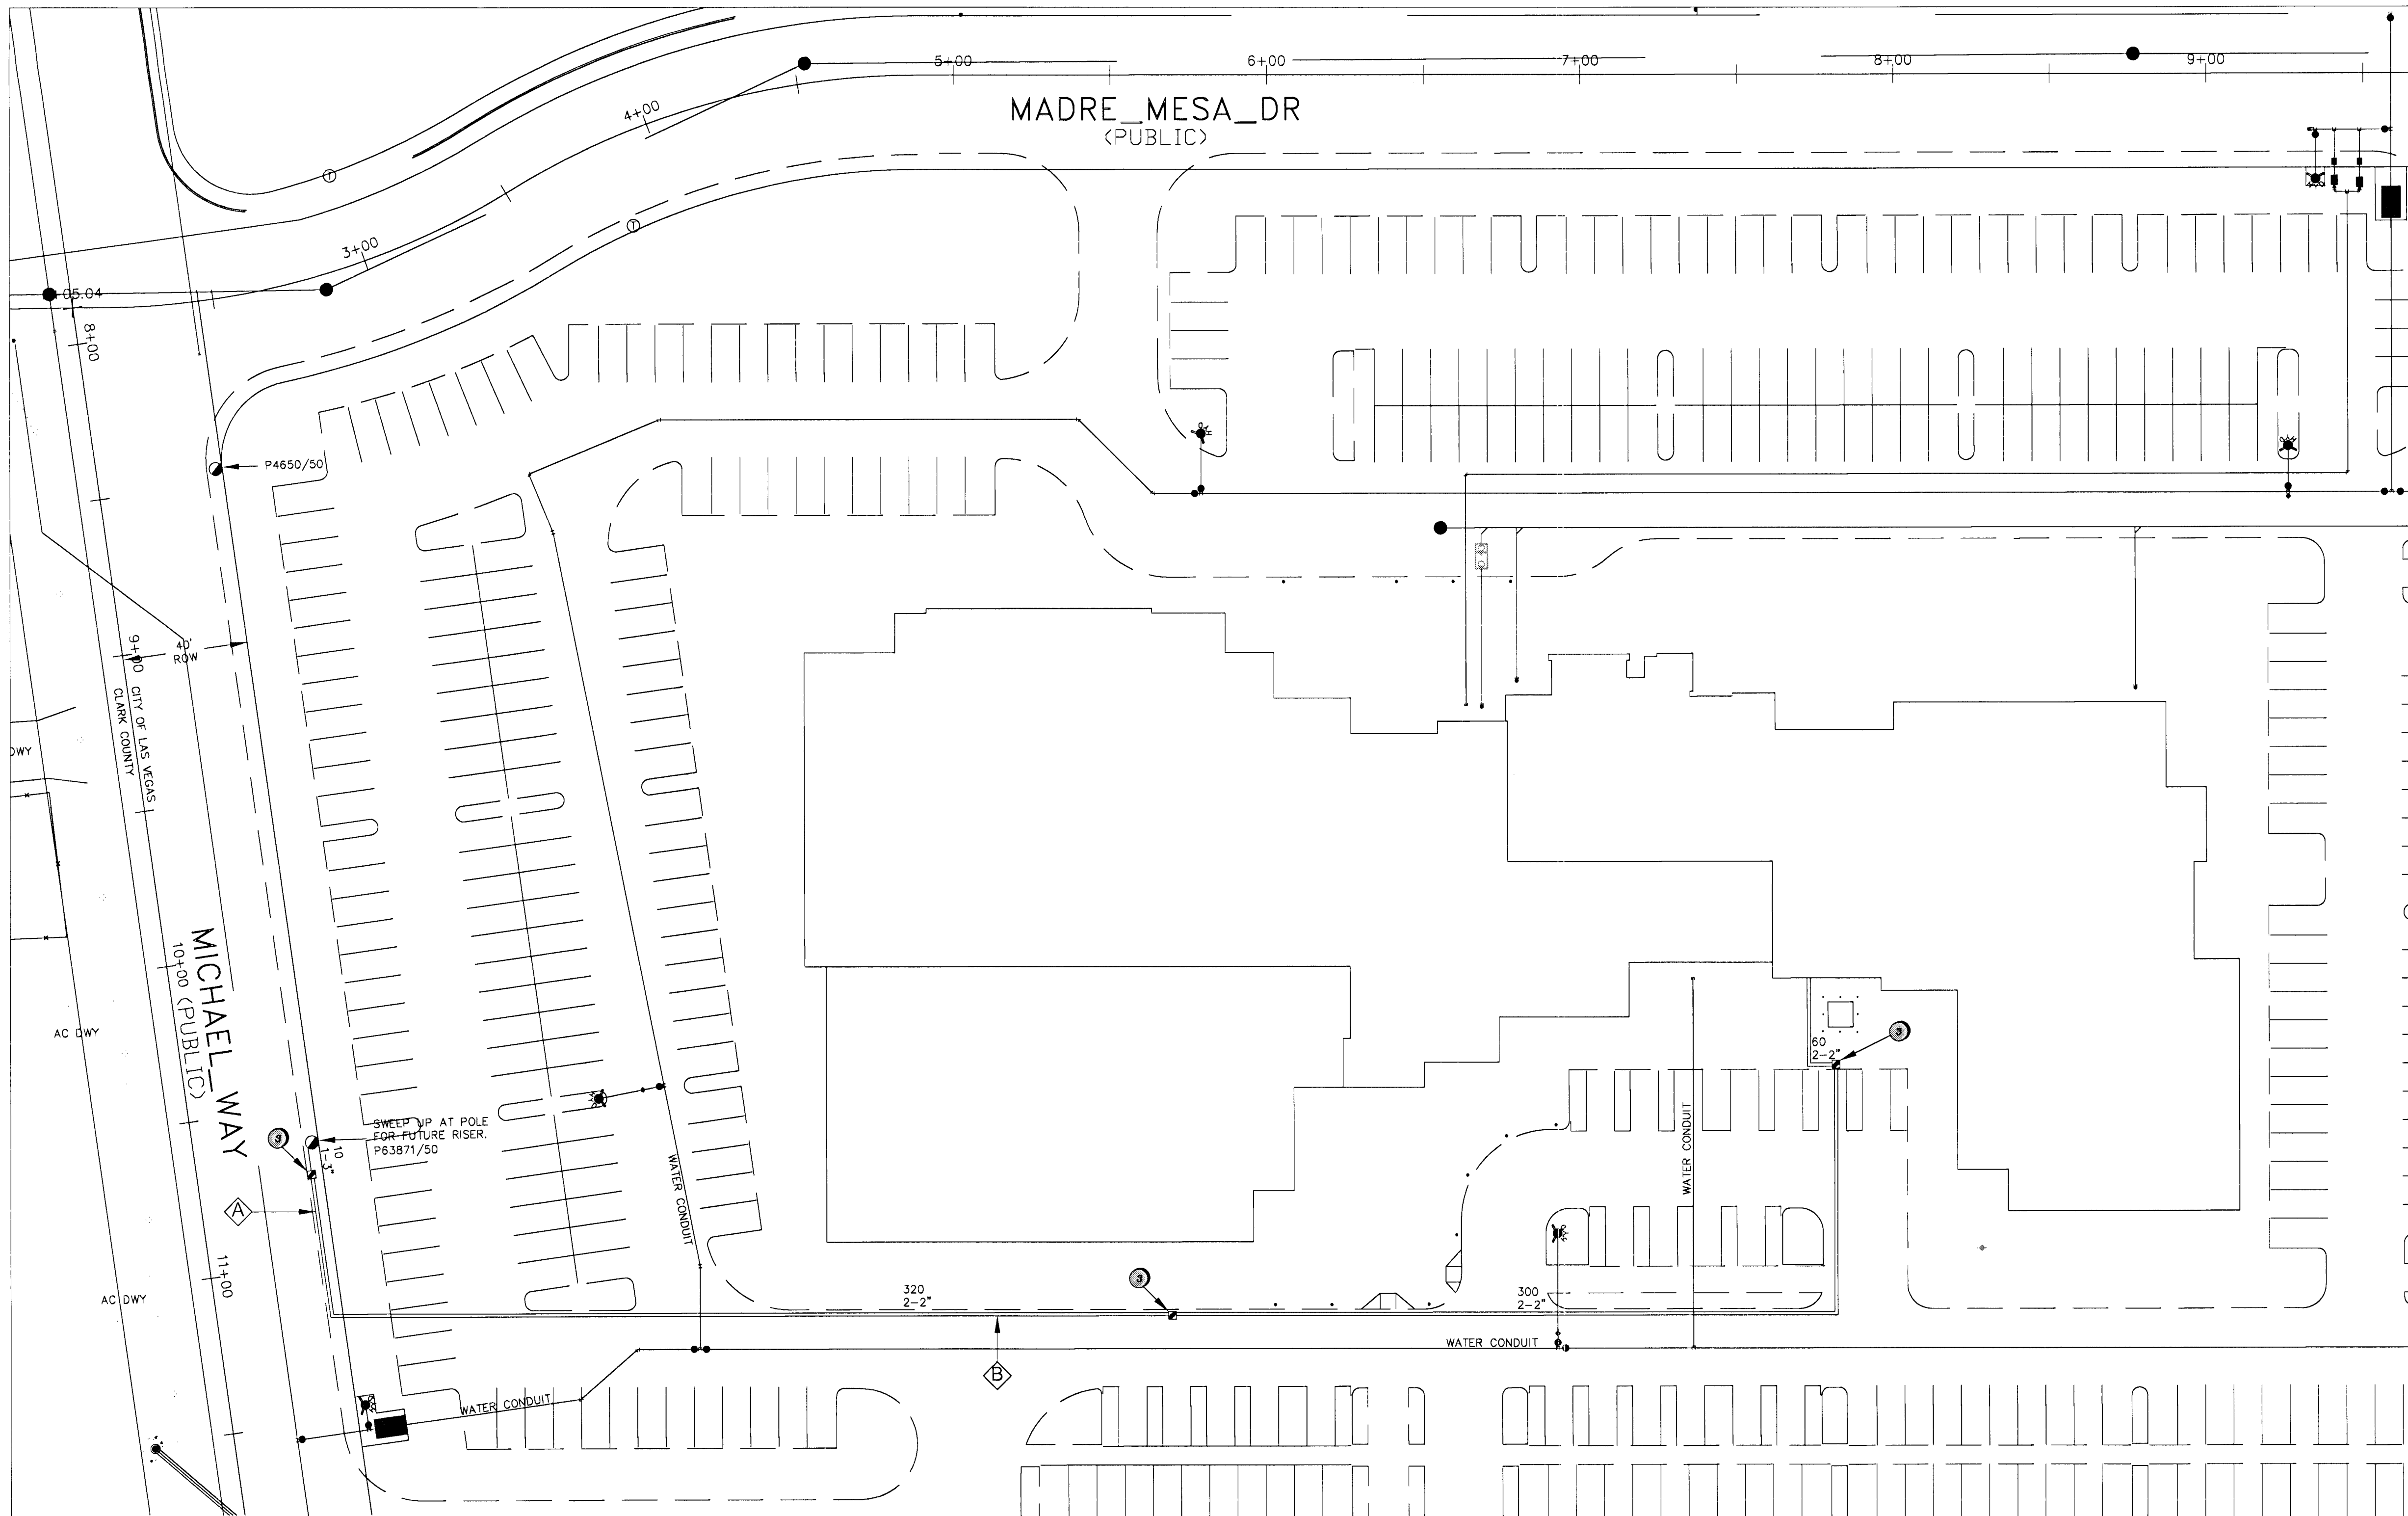

LEGEND	
1	R&R X'- S.W. SLAB(S) OR POTHOLE
2	INSTALL NEW B-50 PULL BOX (13"x24"x24")
2B	EXISTING B-50 PULL BOX (13"x24"x24")
3	INSTALL NEW B-100 PULL BOX (24"x36"x24")
3B	EXISTING B-100 PULL BOX (24"x36"x24")
4	INSTALL NEW T-200 CATV VAULT (30"x48"x36")
4B	EXISTING T-200 CATV VAULT (30"x48"x36")
5	INSTALL NEW T-400 CATV VAULT (36"x60"x36")
5B	EXISTING T-400 CATV VAULT (36"x60"x36")
6	INSTALL NEW T-600 CATV VAULT (48"x72"x36")
6B	EXISTING T-600 CATV VAULT (48"x72"x36")
7	INSTALL NEW CATV PEDESTAL
7B	EXISTING CATV PEDESTAL
8	EXISTING TELCO PULL BOX
8B	EXISTING NV ENERGY PULL BOX
9	EXISTING TELCO MANHOLE
10	INSTALL RHINO CABINET
11	C- SIDEWALK/DIRT TRENCH-INSTALL
12	C- ASPHALT/STREET TRENCH-INSTALL
13	B- PROPOSED BORE
14	X- EXISTING CATV CONDUIT(S)
15	--- RIGHT-OF-WAY LINE
16	--- LOT/PROPERTY LINE
17	----- EDGE OF PAVEMENT
18	-XOH- EXISTING OVERHEAD OF FIBER OPTIC CABLE OR COAX
19	-OH- PROPOSED OVERHEAD INSTALL OF FIBER OPTIC CABLE OR COAX
20	O EXISTING TELCO POLE
21	⊙ EXISTING POWER COMPANY POLE
22	⊗ EXISTING JOINT POLE
23	⊗ JOINT POLE WITH A TRANSFORMER
24	⊗ EXISTING NEVADA POWER TRANSFORMER/TRANSFORMER PAD
25	⊗ COX POWER SUPPLY (49"x24"x52")
26	⊗ RISER POLE/QUADRANT DETAIL RISER OWNERSHIP NOTED (C)CATV (T)TELCO
27	+++ RAILROAD
28	X EXISTING FACILITIES TO BE REMOVED OR ABANDONED

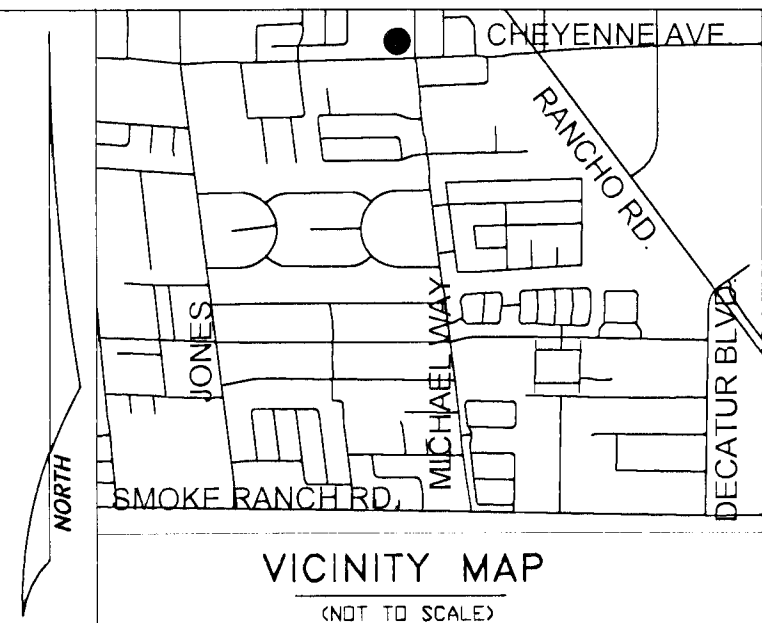

REVISIONS			
REV	DESCRIPTION	DATE	BY
1	MADE CORRECTIONS PER CLV	5/13/11	AFH

COX PROPRIETARY

Approved for Construction
THIS APPROVAL IS FOR WORK IN CLV R W OR CLV EASEMENTS ONLY. OBTAINING PERMISSIONS OR EASEMENTS FOR WORK SHOWN ON PRIVATE PROPERTY IS THE RESPONSIBILITY OF THE UTILITY.
David H. Jensen 5/19/2011
APPROVAL DATE

PERMIT #	DRAWN BY: AFH
DATE: 7/15/2010	SCALE: 1:30
NODE: NW390	W.O. # 193695
TECH # 928	APPROVED BY:

1700 Vegas Drive
Las Vegas, NV 89106
Fax: 702/545-2806

CITY ENTITY
CITY OF LAS VEGAS
731 SOUTH FOURTH STREET
LAS VEGAS, NEVADA 89101
(702) 229-6301

PROJECT LOCATION
SHEET NO.
SUB-CONTRACTOR
CITY NOLES: 11-38391 Pub 207 V 5608-1-47C
SHEET 2 of 3

AGUILAS CFC CHURCH
5355 MADRE MESA DR.
CITY NOLES: 11-38391 Pub 207 V 5608-1-47C
SHEET 2 of 3

DISCLAIMER NOTE
UTILITY LOCATIONS SHOWN HEREON ARE APPROXIMATE ONLY. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE EXACT HORIZONTAL AND VERTICAL LOCATION OF ALL EXISTING UNDERGROUND AND OVERHEAD UTILITIES PRIOR TO COMMENCING CONSTRUCTION. NO REPRESENTATION IS MADE THAT ALL EXISTING UTILITIES ARE SHOWN HEREON. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR UTILITIES NOT SHOWN OR UTILITIES NOT SHOWN IN THEIR PROPER LOCATION.


Avoid cutting underground utility lines. It's costly.

Call **811** before you Dig or 1-800-227-2600 UNDERGROUND SERVICE (USA)

Avoid overhead power line contact.

Call before you OVERHEAD 1-702-227-2929 NEVADA POWER ENVIRONMENT AND SAFETY SERVICES DEPARTMENT

TOTAL BORE -
TOTAL DIRT TRENCH -
TOTAL ASPHALT TRENCH -
TOTAL TRENCH -
SIDEWALK REMOVAL/REPAIR -
TOTAL S/W PANELS -
TOTAL LINEAR FOOTAGE -

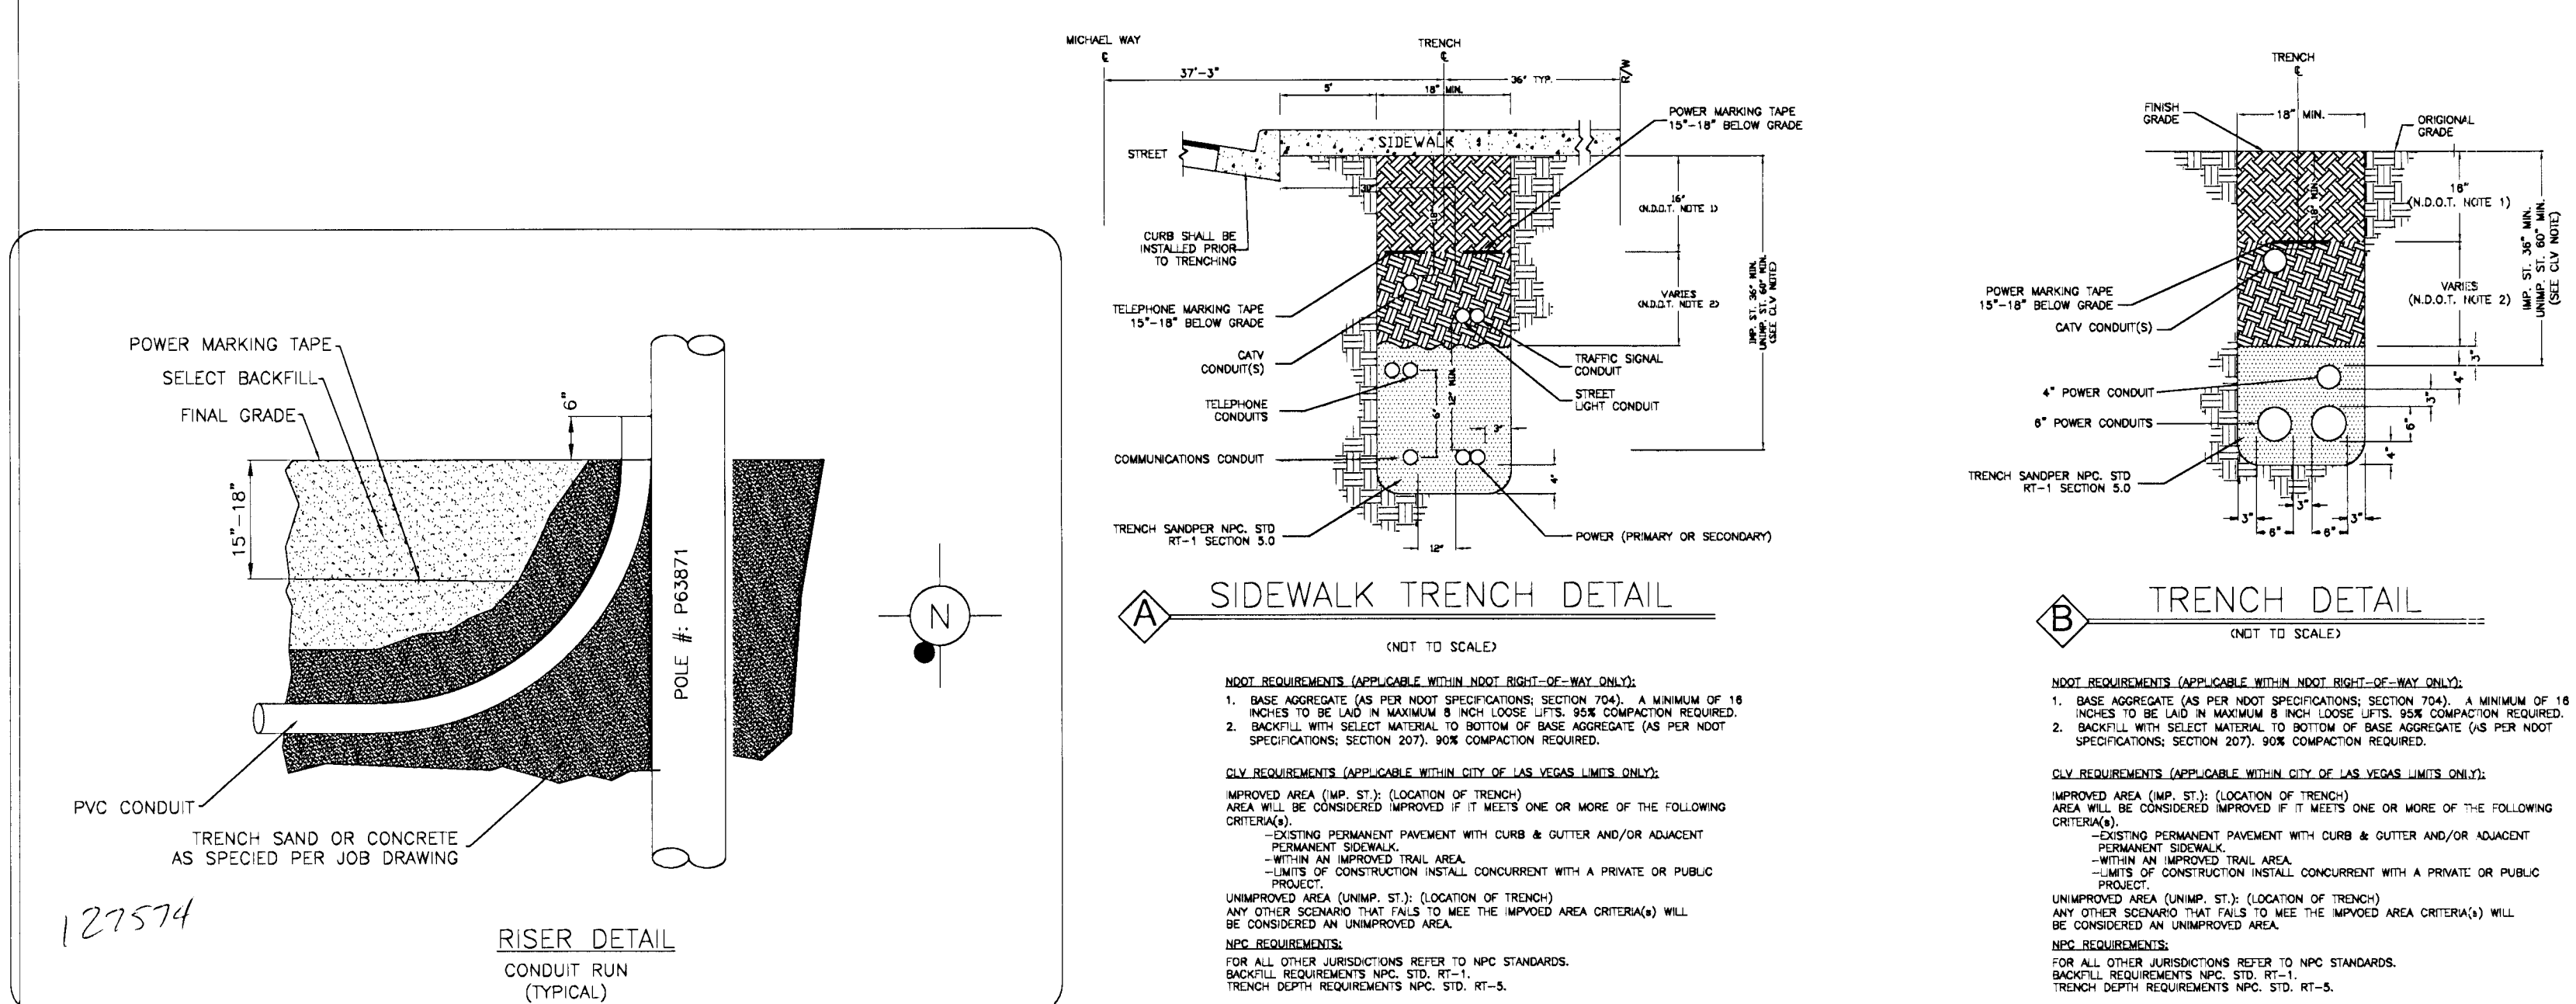

ALL CONSTRUCTION AND MATERIALS SHALL BE IN ACCORDANCE WITH THE "UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION OFF-SITE IMPROVEMENTS, CLARK COUNTY AREA NEVADA", LATEST ISSUE; THE "UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, CLARK COUNTY AREA NEVADA", LATEST ISSUE; AND OTHER APPLICABLE APPROVED STANDARDS ISSUED BY THE CONTROLLING AGENCY; ALL LOCAL CITY CODES AND ORDINANCES APPLICABLE.

