



U.S. SHIELDS - INDEPENDENT USE

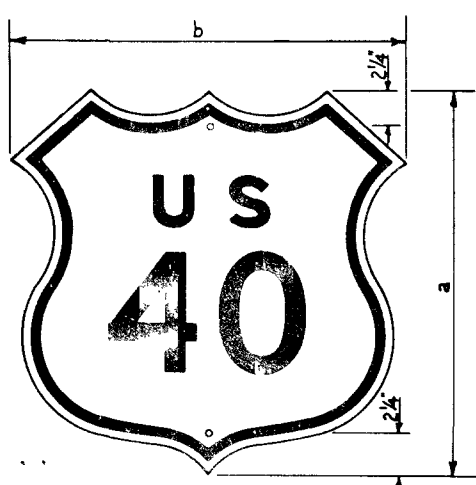

M 1-3

DIGITS	SHIELD SIZE	SQ. FT.
1 or 2	24" x 24"	4.00
3	28" x 24"	4.66

U.S. SHIELDS ON GUIDE SIGNS

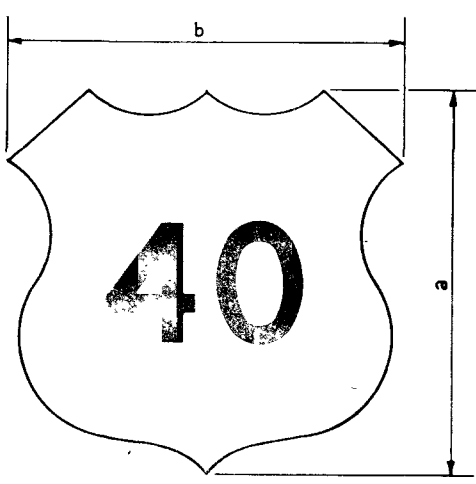


M1-4

2 DIGITS	SHIELD SIZE		SQ. FT.
	a	b	
10"	24"	28"	4.66
12"	30"	35"	7.30
15"	36"	42"	10.50
18"	42"	49"	14.28

3 DIGITS	SHIELD SIZE		SQ. FT.
	a	b	
10"	24"	36"	6.00
12"	30"	45"	9.38
15"	36"	54"	13.50
18"	42"	63"	18.38


59073
RURAL AND URBAN
Erection: Right-hand side of roadway; facing and at right angles to direction of traffic; construction signs 6' to 12' from edge of travel way. Signs on construction projects shall have warning lights at night. *Arvent*

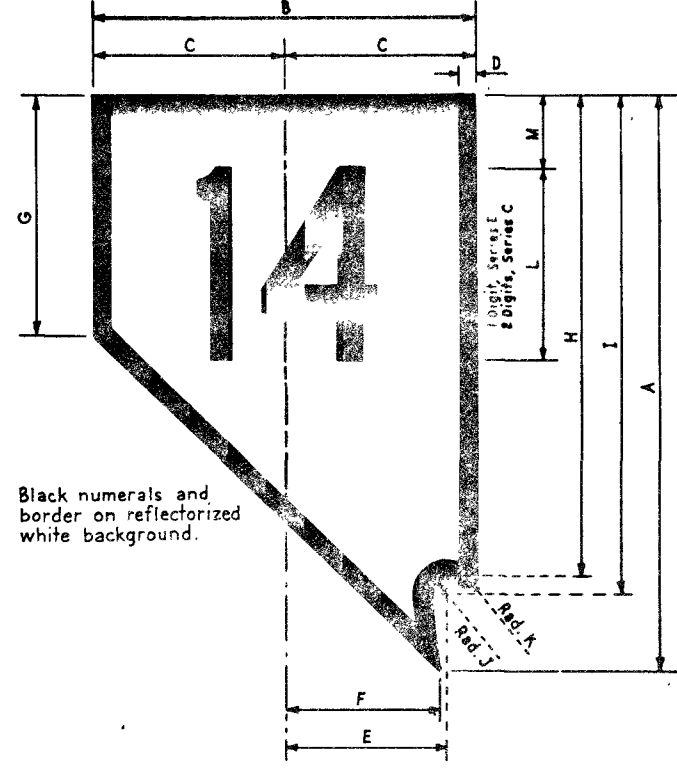

Black numerals and border on reflectorized white background.


Shield Size	A	B	C	D	E	F	G	H	I	J	K	L	M	SQ. FT.
	18"	18	12	6	3 1/16	5 1/16	4 1/8	8	15	15 1/2	1/2	3/16	6	
24"	24	16	8	3/4	6 3/4	6 1/2	10 3/4	20	20 3/4	3/4	7/16	8	3	2.66
36"	36	24	12	1 1/8	10 1/8	9 3/4	16	30	31 1/2	1	5/8	12	4 1/2	6.00

M1-5S

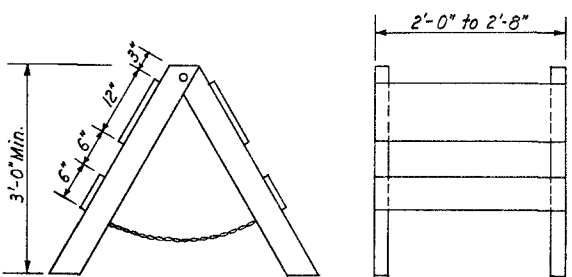


CLASS 2 BARRICADE
 (Minimum Requirements)

- NOTES:**
- Where striping is used each barricade rail shall be marked with alternate reflectorized black and white (or yellow) stripes of 4" to 6" width at a 45° angle.
 - Barricade may be rigid, hinged or demountable.
 - Warning lights and illumination for barricades shall be as directed by the Engineer.

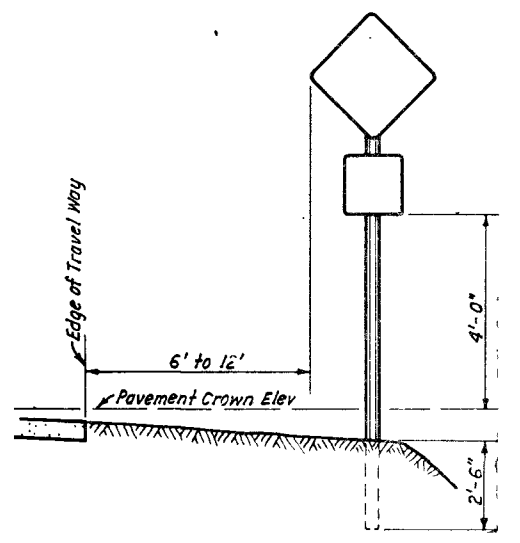


RURAL AREA

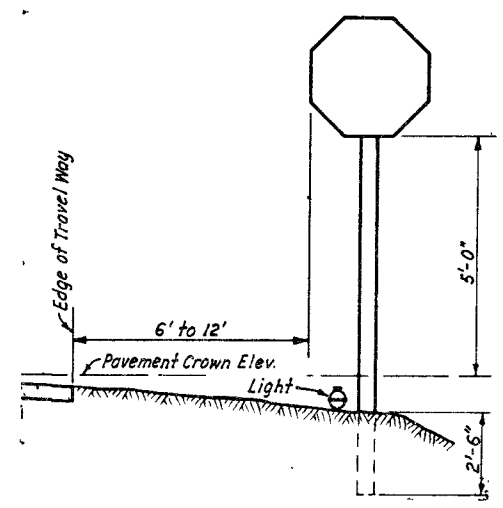

URBAN AREA


INTERSTATE SHIELD - INDEPENDENT USE

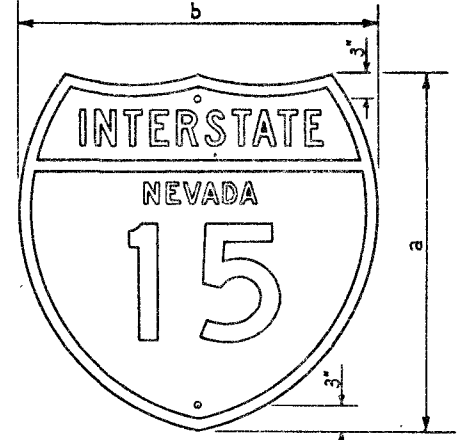

M1-7


2 DIGITS	SHIELD SIZE		SQ. FT.
	a	b	
6"	18"	21"	2.63
8"	24"	24"	4.00
12"	36"	36"	9.00

INTERSTATE SHIELDS ON GUIDE SIGNS


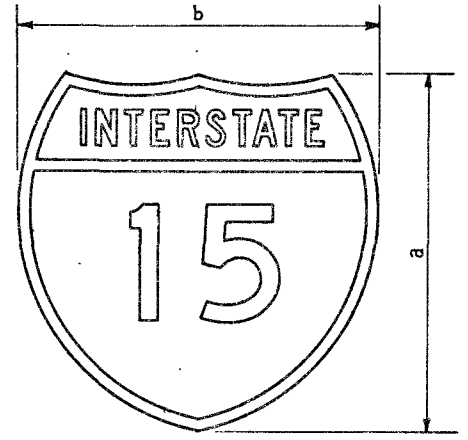


M1-8


2 DIGITS	SHIELD SIZE		SQ. FT.
	a	b	
10"	24"	24"	4.00
15"	36"	36"	9.00
18"	48"	48"	16.00

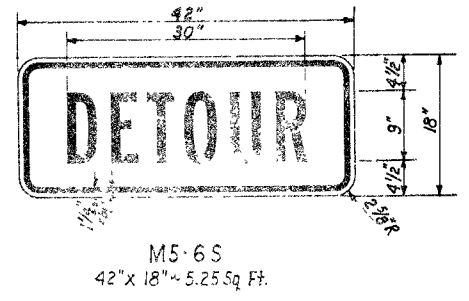

M5-6S
 42" x 18" ~ 5.25 Sq. Ft.


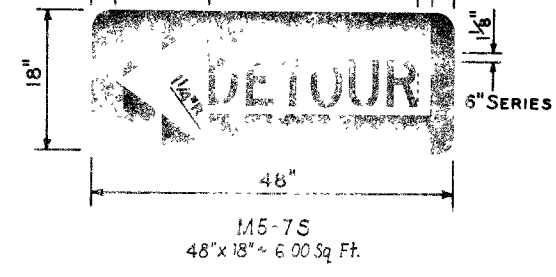
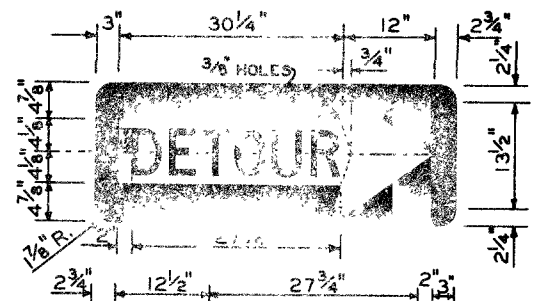


M5-7S
 48" x 18" ~ 6.00 Sq. Ft.

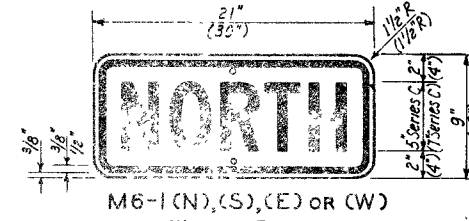


M6-1 (N), (S), (E) or (W)

Minor or Expressway
 18" x 9" - Black letters & border on white background.
 Interstate
 30" x 15" - White letters and border on blue background.
 21" x 9" ~ 1.31 Sq. Ft.
 30" x 15" ~ 3.13 Sq. Ft.

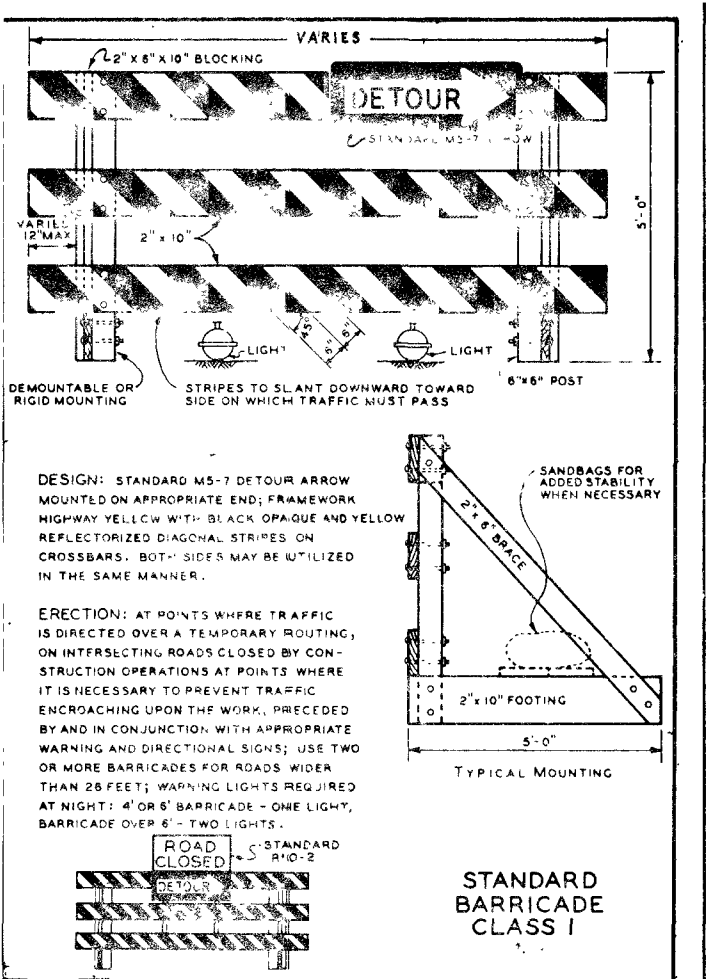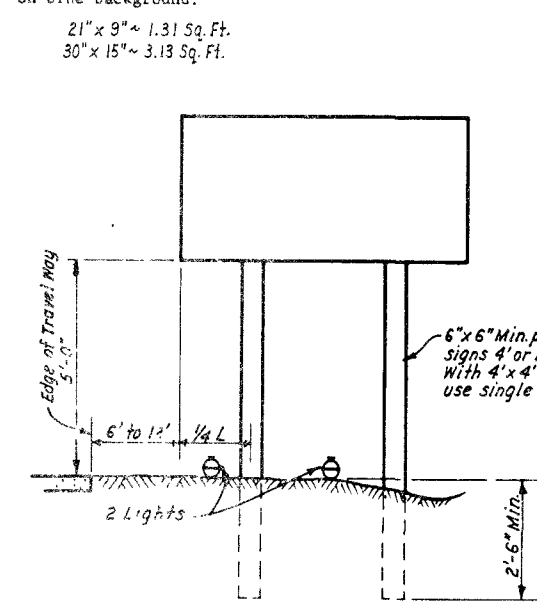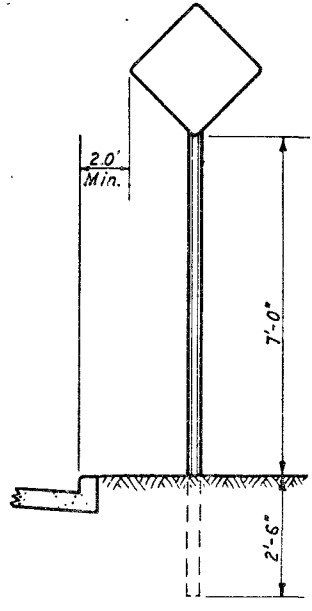

DESIGN: STANDARD M5-7 DETOUR ARROW MOUNTED ON APPROPRIATE END; FRAMEWORK HIGHWAY YELLOW WITH BLACK OPAQUE AND YELLOW REFLECTORIZED DIAGONAL STRIPES ON CROSSBARS. BOTH SIDES MAY BE UTILIZED IN THE SAME MANNER.


ERECTION: AT POINTS WHERE TRAFFIC IS DIRECTED OVER A TEMPORARY ROUTING, ON INTERSECTING ROADS CLOSED BY CONSTRUCTION OPERATIONS AT POINTS WHERE IT IS NECESSARY TO PREVENT TRAFFIC ENCROACHING UPON THE WORK, PRECEDED BY AND IN CONJUNCTION WITH APPROPRIATE WARNING AND DIRECTIONAL SIGNS; USE TWO OR MORE BARRICADES FOR ROADS WIDER THAN 26 FEET; WARNING LIGHTS REQUIRED AT NIGHT: 4' OR 6' BARRICADE - ONE LIGHT, BARRICADE OVER 6' - TWO LIGHTS.

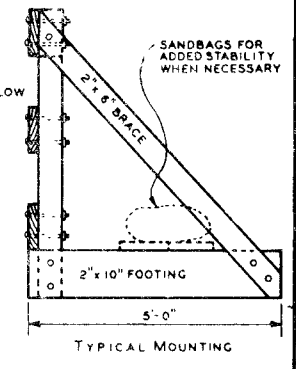

STANDARD BARRICADE CLASS I

GENERAL NOTES

- For signs not dimensioned see "Standard Highway Signs as Specified in the Manual on Uniform Traffic Control Devices 1961" and the "Manual for Signing and Pavement Marking of the National System of Interstate and Defense Highways".
- For installation of Permanent Signs see Standard Sign Support sheets.
- Incandescent lamps shall be 200 watts housed in a standard dome fixture and shall burn from dusk to dawn. Lamps shall burn (base up) in a vertical position. It shall be the contractor's responsibility to conform to the National Electric Code and local codes on all lighting installations. All lamps shall have a 15' mounting height.

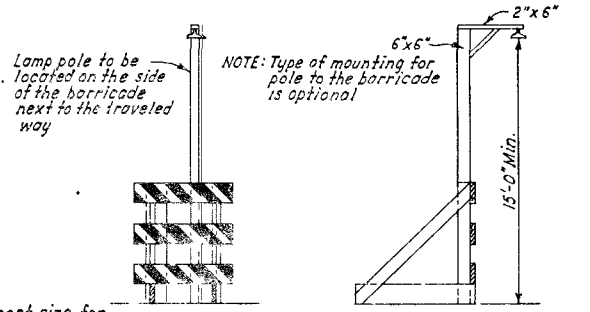

CLASS 1A BARRICADE
 107V 3833

173 STATE OF NEVADA DEPARTMENT OF HIGHWAYS
STANDARD ROUTE MARKERS BARRICADES AND CONSTRUCTION SIGN INSTALLATIONS