



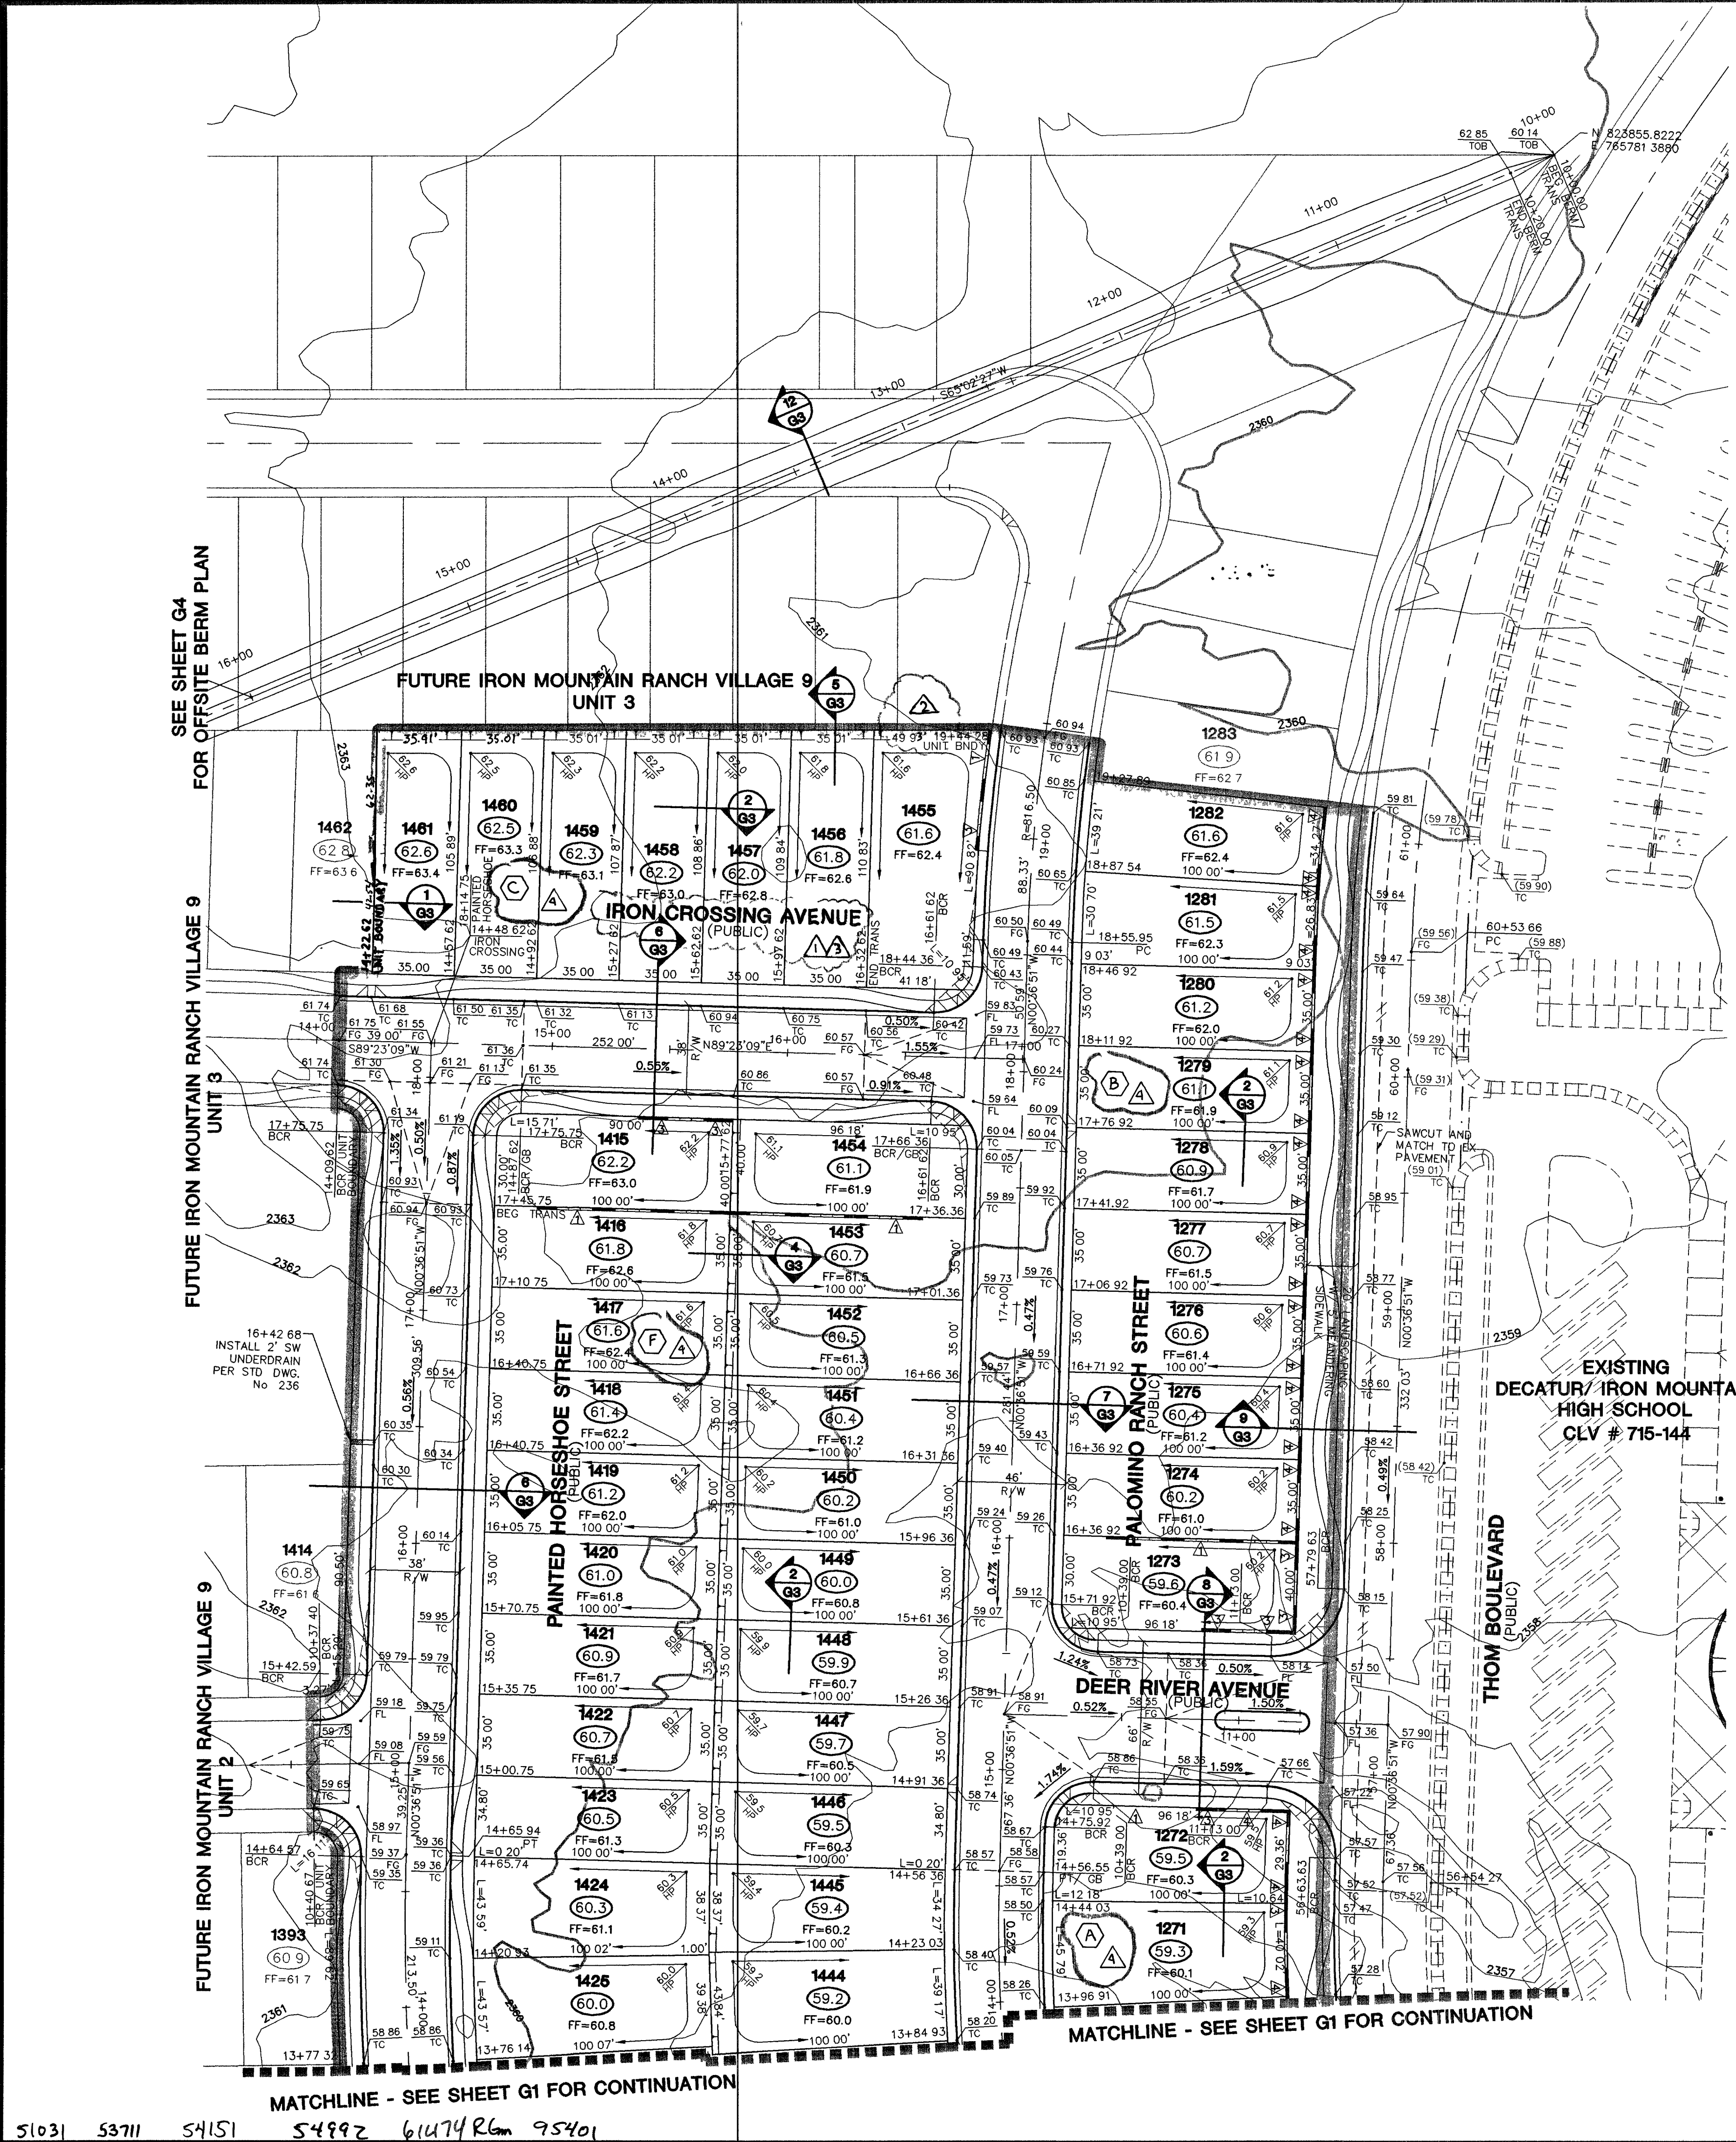

SIDEWALK RAMPS TABLE			
PER STD DWG 235 CASE 1			
NO.	DIM "A"	DIM "B"	CASE
1	8.0'	8.0'	1

NOTE:
ALL DRAINAGE EASEMENTS ARE COMMON LOTS AND PUBLIC DRAINAGE EASEMENTS TO BE PRIVATELY MAINTAINED BY THE HOME OWNERS ASSOCIATION.

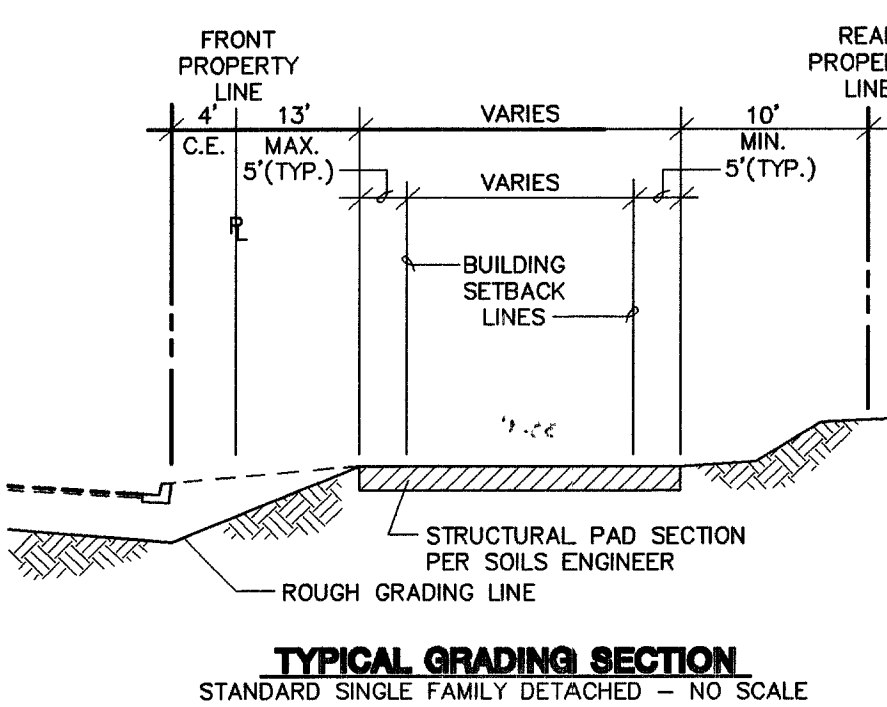

- NOTES:**
1. STRUCTURAL PAD SHALL BE 5' BEYOND BLDG. SETBACK SEE TYPICAL GRADING SECTION.
 2. REFER TO GENERAL NOTE 1.
 3. REAR LOT CORNER GRADES ARE EQUAL TO ADJACENT LOTS UNLESS SHOWN OTHERWISE.
 4. MINIMUM SIDEYARD X-SLOPE SHALL BE 2%.
 5. MAXIMUM REAR YARD SLOPE IS 2:1 AS SHOWN, EXCEPT THAT WITHIN 15' OF THE HOUSE, THE MAXIMUM SLOPE IS 12:1.
 6. MAXIMUM SIDEYARD SLOPE IS 5:1 AS SHOWN EXCEPT THAT WITHIN 5' OF THE HOUSE, THE MAXIMUM SLOPE IS 12:1.
 7. MINIMUM 1% DRAINAGE AWAY FROM BUILDING PAD.

NOTE: ALL OF THE RETAINING WALL HEIGHTS ARE DETERMINED WITH THE TOP OF THE FOOTING BEING APPROXIMATELY 4" BELOW EXISTING GRADE, WITH THE EXCEPTION OF RETAINING WALLS WHICH ARE NEXT TO A SIDEWALK, ALL OF THESE ARE FIGURED TO HAVE THE TOP OF FOOTING BEING 8" BELOW THE TOP OF THE SIDEWALK.

TOP OF RETAINING WALL TO BE AT OR ABOVE UPPER PAD ELEVATION.



RETAINING WALL CONVERSION TABLE		
STANDARD RETAINER	RETAINER NEXT TO SIDEWALK	
1	0.4-0.7'	N/A
2	0.71-0.83'	N/A
3	0.84-1.5'	0.7-1.17'
4	1.51-2.17'	1.18-1.83'
5	2.18-2.83'	1.84-2.5'
6	2.84-3.5'	2.51-3.17'
7	3.51-4.17'	3.18-3.83'
8	4.18-4.83'	3.84-4.5'
9	4.84-5.5'	4.51-5.17'
10	5.51-6.17'	5.18-5.83'
11	6.18-6.83'	5.84-6.5'
12	6.84-7.5'	6.51-7.17'

Call before you Overhead
1-702-593-6111

Call before you Dig
1-800-227-2600

"I CERTIFY THAT THIS GRADING PLAN IS IN CONFORMANCE WITH THE APPROVED DRAINAGE STUDY ON FILE AT THE CITY OF LAS VEGAS FOR THIS PROJECT"

Ken Nicholson PE# 10539 DATE 1-15-03

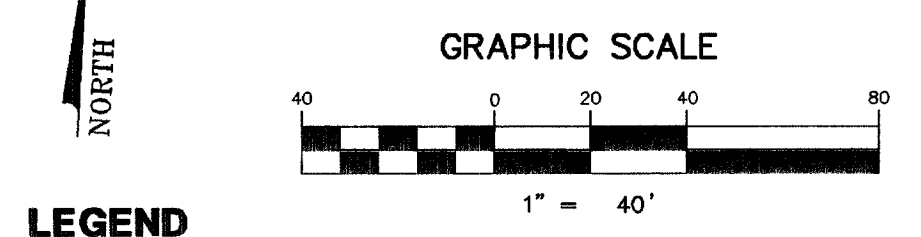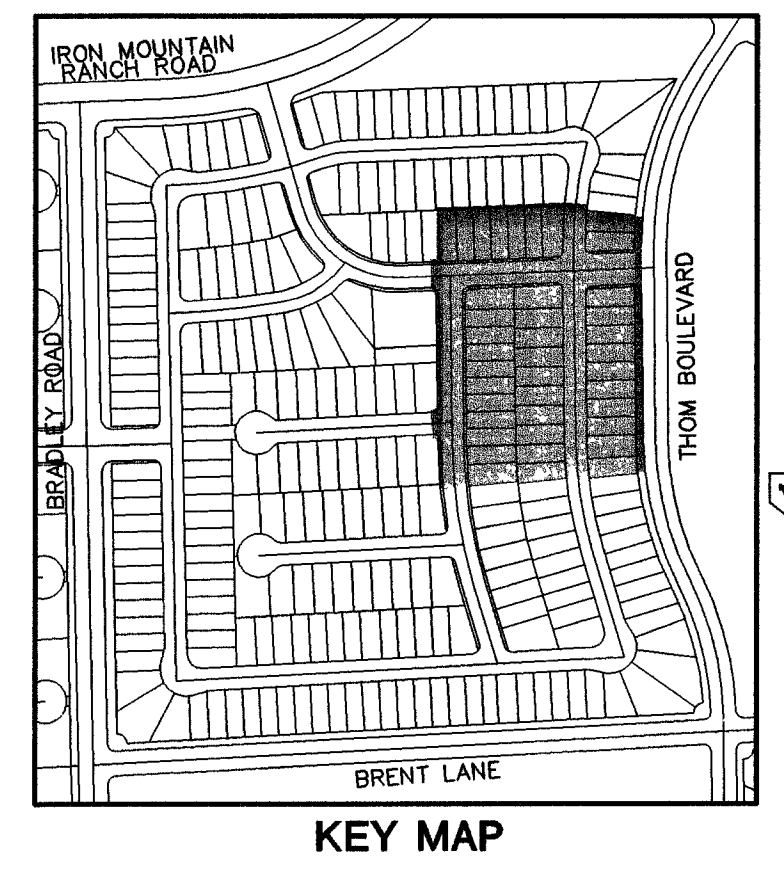

- LEGEND**
- | | | |
|--------|---------------------------------|--------------------------|
| FG | FINISH GRADE | EX. CONTOUR(5' INTERVAL) |
| FL | FLOW LINE | EX. CONTOUR(1' INTERVAL) |
| TC | TOP OF CURB | PROPOSED CONTOUR |
| TRC | TOP OF ROLL CURB | PROPOSED PAD GRADE |
| EAC | EDGE OF ASPHALT PAVEMENT | FUT./EXIST. PAD GRADE |
| FUT. | FUTURE | SLOPE AND FLOW DIRECTION |
| EXIST | EXISTING (EX) | EDGE OF EXIST. A.C. |
| VO | VALLEY CUTTER | SAW CUT & MATCH A.C. |
| NG | NATURAL GROUND | SIDEWALK RAMP |
| H.P. | HIGH POINT | PAD SWALE SLOPES |
| L.P. | LOW POINT | SCARP AREA |
| C/L | CENTER LINE | LOT NUMBER |
| O/C | OFFSET CROWN | BLOCK NUMBER |
| BC | BACK OF CURB | RETAINING HEIGHT (FEET) |
| BCR | BEGIN CURB RETURN | SIGHT VISIBILITY ZONES |
| TF | TOP OF FOOTING | PROJECT BOUNDARY LINE |
| GS | GRADE BREAK | R/W OR P/L |
| PC | POINT OF CURVATURE | EXIST. IMPROVEMENTS |
| PT | POINT OF TANGENCY | FUTURE IMPROVEMENTS |
| PRC | POINT OF REVERSE CURVATURE | CENTER LINE |
| PCC | POINT OF COMPOUND CURVATURE | RETAINING WALL |
| BVC | BEGIN VERTICAL CURVE | CONC. BLOCK WALL |
| MVC | MID-POINT OF VERTICAL CURVE | EXIST. CONC. BLOCK WALL |
| EVC | END VERTICAL CURVE | EXIST. DIRT ROAD |
| PRVC | POINT OF REVERSE VERTICAL CURVE | EXIST. AC |
| VPI | VERTICAL POINT OF INTERSECTION | |
| TPW | TOP OF PLANTER WALL | |
| TRW | TOP OF RETAINMENT WALL | |
| TOE | TOP OF CHANNEL/SCARP | |
| TOB | TOP OF BOX | |
| PP | POWER POLE | |
| TRANS. | TRANSITION | |
| RET. | RETAINMENT | |
| INT. | INTERSECTION | |
| D.G. | DESIGN GRADE | |
| TSW | TOP OF SIDEWALK | |
| FF | FINISH FLOOR | |
| OFF | BASE FLOOD ELEVATION | |
| R/W | RIGHT-OF-WAY | |
| S/W | SIDEWALK | |

CITY OF LAS VEGAS GRADING NOTES

1. IN THE EVENT THAT ANY UNFORESEEN CONDITIONS NOT COVERED BY THESE NOTES ARE ENCOUNTERED DURING GRADING OPERATIONS, THE OWNER/ENGINEER SHALL BE IMMEDIATELY NOTIFIED FOR DIRECTION.
2. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PERFORM ALL NECESSARY CUTS AND FILLS WITHIN THE LIMITS OF THIS PROJECT AND THE RELATED OFF-SITE WORK, SO AS TO GENERATE THE DESIRED SUBGRADE, FINISH GRADES AND SLOPES SHOWN.
3. CONTRACTOR SHALL TAKE RESPONSIBILITY FOR ALL EXCAVATION, ADEQUATE SHORING SHALL BE DESIGNED AND PROVIDED BY THE CONTRACTOR TO PREVENT UNDERMINING OF ANY ADJACENT FEATURES OR FACILITIES AND/OR CAVING OF THE EXCAVATION.
4. THE CONTRACTOR IS WARNED THAT AN EARTHWORK BALANCE WAS NOT NECESSARILY THE INTENT OF THIS PROJECT. ANY ADDITIONAL MATERIAL REQUIRED OR LEFTOVER MATERIAL FOLLOWING EARTHWORK OPERATIONS BECOMES THE RESPONSIBILITY OF THE CONTRACTOR.
5. THE GRADING CONTRACTOR IS RESPONSIBLE TO COORDINATE WITH THE OWNER TO PROVIDE FOR THE REQUIREMENTS OF THE PROJECT STORM WATER POLLUTION PREVENTION PLAN (SWPPP) AND ASSOCIATED.
6. CONTRACTOR SHALL GRADE TO THE LINES AND ELEVATIONS SHOWN ON THE PLANS WITHIN THE FOLLOWING HORIZONTAL AND VERTICAL TOLERANCES AND DEGREES OF COMPACTION, IN THE AREAS INDICATED:

HORIZONTAL VERTICAL COMPACTION	
A. PAVEMENT AREA SUBGRADE	0.1" +0.0' to -0.1'
B. ENGINEERED FILL	0.5" +0.1' to -0.1'
C. CONCRETE	0.1" +0.1' to -0.1'

COMPACTION TESTING WILL BE PERFORMED BY THE OWNER OR HIS REPRESENTATIVE.
7. ALL CUT AND FILL SLOPES SHALL BE PROTECTED UNTIL EFFECTIVE EROSION CONTROL HAS BEEN ESTABLISHED.
8. THE USE OF POTABLE WATER WITHOUT A SPECIAL PERMIT FOR BUILDING OR CONSTRUCTION PURPOSES INCLUDING CONSOLIDATION OF BACKFILL OR DUST CONTROL IS PROHIBITED. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS FOR CONSTRUCTION WATER.
9. THE CONTRACTOR SHALL MAINTAIN THE STREETS, SIDEWALKS AND ALL OTHER PUBLIC RIGHT-OF-WAY IN A CLEAN, SAFE AND USABLE CONDITION. ALL SPILLS OF SOIL, ROCK OR CONSTRUCTION DEBRIS SHALL BE PROMPTLY REMOVED FROM ALL THE PUBLICLY OWNED PROPERTY DURING CONSTRUCTION AND UPON COMPLETION OF THE PROJECT. ALL ADJACENT PROPERTY, PRIVATE OR PUBLIC SHALL BE MAINTAINED IN A CLEAN, SAFE AND USABLE CONDITION.
10. IN THE EVENT THAT ANY TEMPORARY CONSTRUCTION ITEM IS REQUIRED THAT IS NOT SHOWN ON THESE DRAWINGS, THE OWNER AGREES TO PROVIDE AND INSTALL SUCH ITEM AT HIS OWN EXPENSE AND AT THE DIRECTION OF THE CITY ENGINEER. TEMPORARY CONSTRUCTION INCLUDES DITCHES, BERMS, ROAD SIGNS AND BARRICADES, ETC.

PROJECT BENCHMARK

PROJECT DATUM: NAVD88
(OLD) CITY OF LAS VEGAS BENCHMARK 1LV90-13NES
NAVD88 ELEVATION: 710.9608 METERS (2332.54 FEET)
PROJECT DESIGNED USING OLD BENCHMARK
(NEW) CITY OF LAS VEGAS BENCHMARK 1LV90-13NES
NAVD88 ELEVATION: 710.9181 METERS (2332.40 FEET)
(-0.14 FEET) TO GET NEW PUBLISHED DATUM

ONLY BM 413148, NAVD 88 ELEV=710.953 METERS (2332.52 FEET) 1" DIAMETER CONCRETE MONUMENT 77 FEET SOUTH & 54 FEET WEST OF N.E. CORNER OF 1/4 SECTION 36, T13N R96E 10' EAST OF LARGE POWER POLE.

BASIS OF BEARINGS

THE BASIS OF BEARINGS FOR THIS PROJECT IS GRID NORTH AS DEFINED BY THE NEVADA COORDINATE SYSTEM OF 1983 (NCS83), EAST ZONE, (2701), DETERMINED BY CLARK COUNTY GIS CONTROL POINTS 802, 803, 804, AND 805, AS SHOWN ON A RECORD OF SURVEY ON FILE IN THE CLARK COUNTY, NEVADA, RECORDER'S OFFICE, IN BOOK 88 OF SURVEYS, AT PAGE 53.

KB HOME 750 PILOT ROAD, SUITE F LAS VEGAS, NV 89119 (702) 614-2500		GRADING PLAN		IRON MOUNTAIN RANCH VILLAGE 9 UNIT 1	
DESIGNED BY: R.M.S.	MAY '02	CHECKED BY: KEN	MAY '02	PROJECT NO: 2975-1	SCALE: 1"=40' HORIZ. N/A VERT.
SHEET 8 OF 27 SHEETS DRAWING NO. 1074-4604-9-1					