


ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED, ALL STATIONS ARE IN METERS.

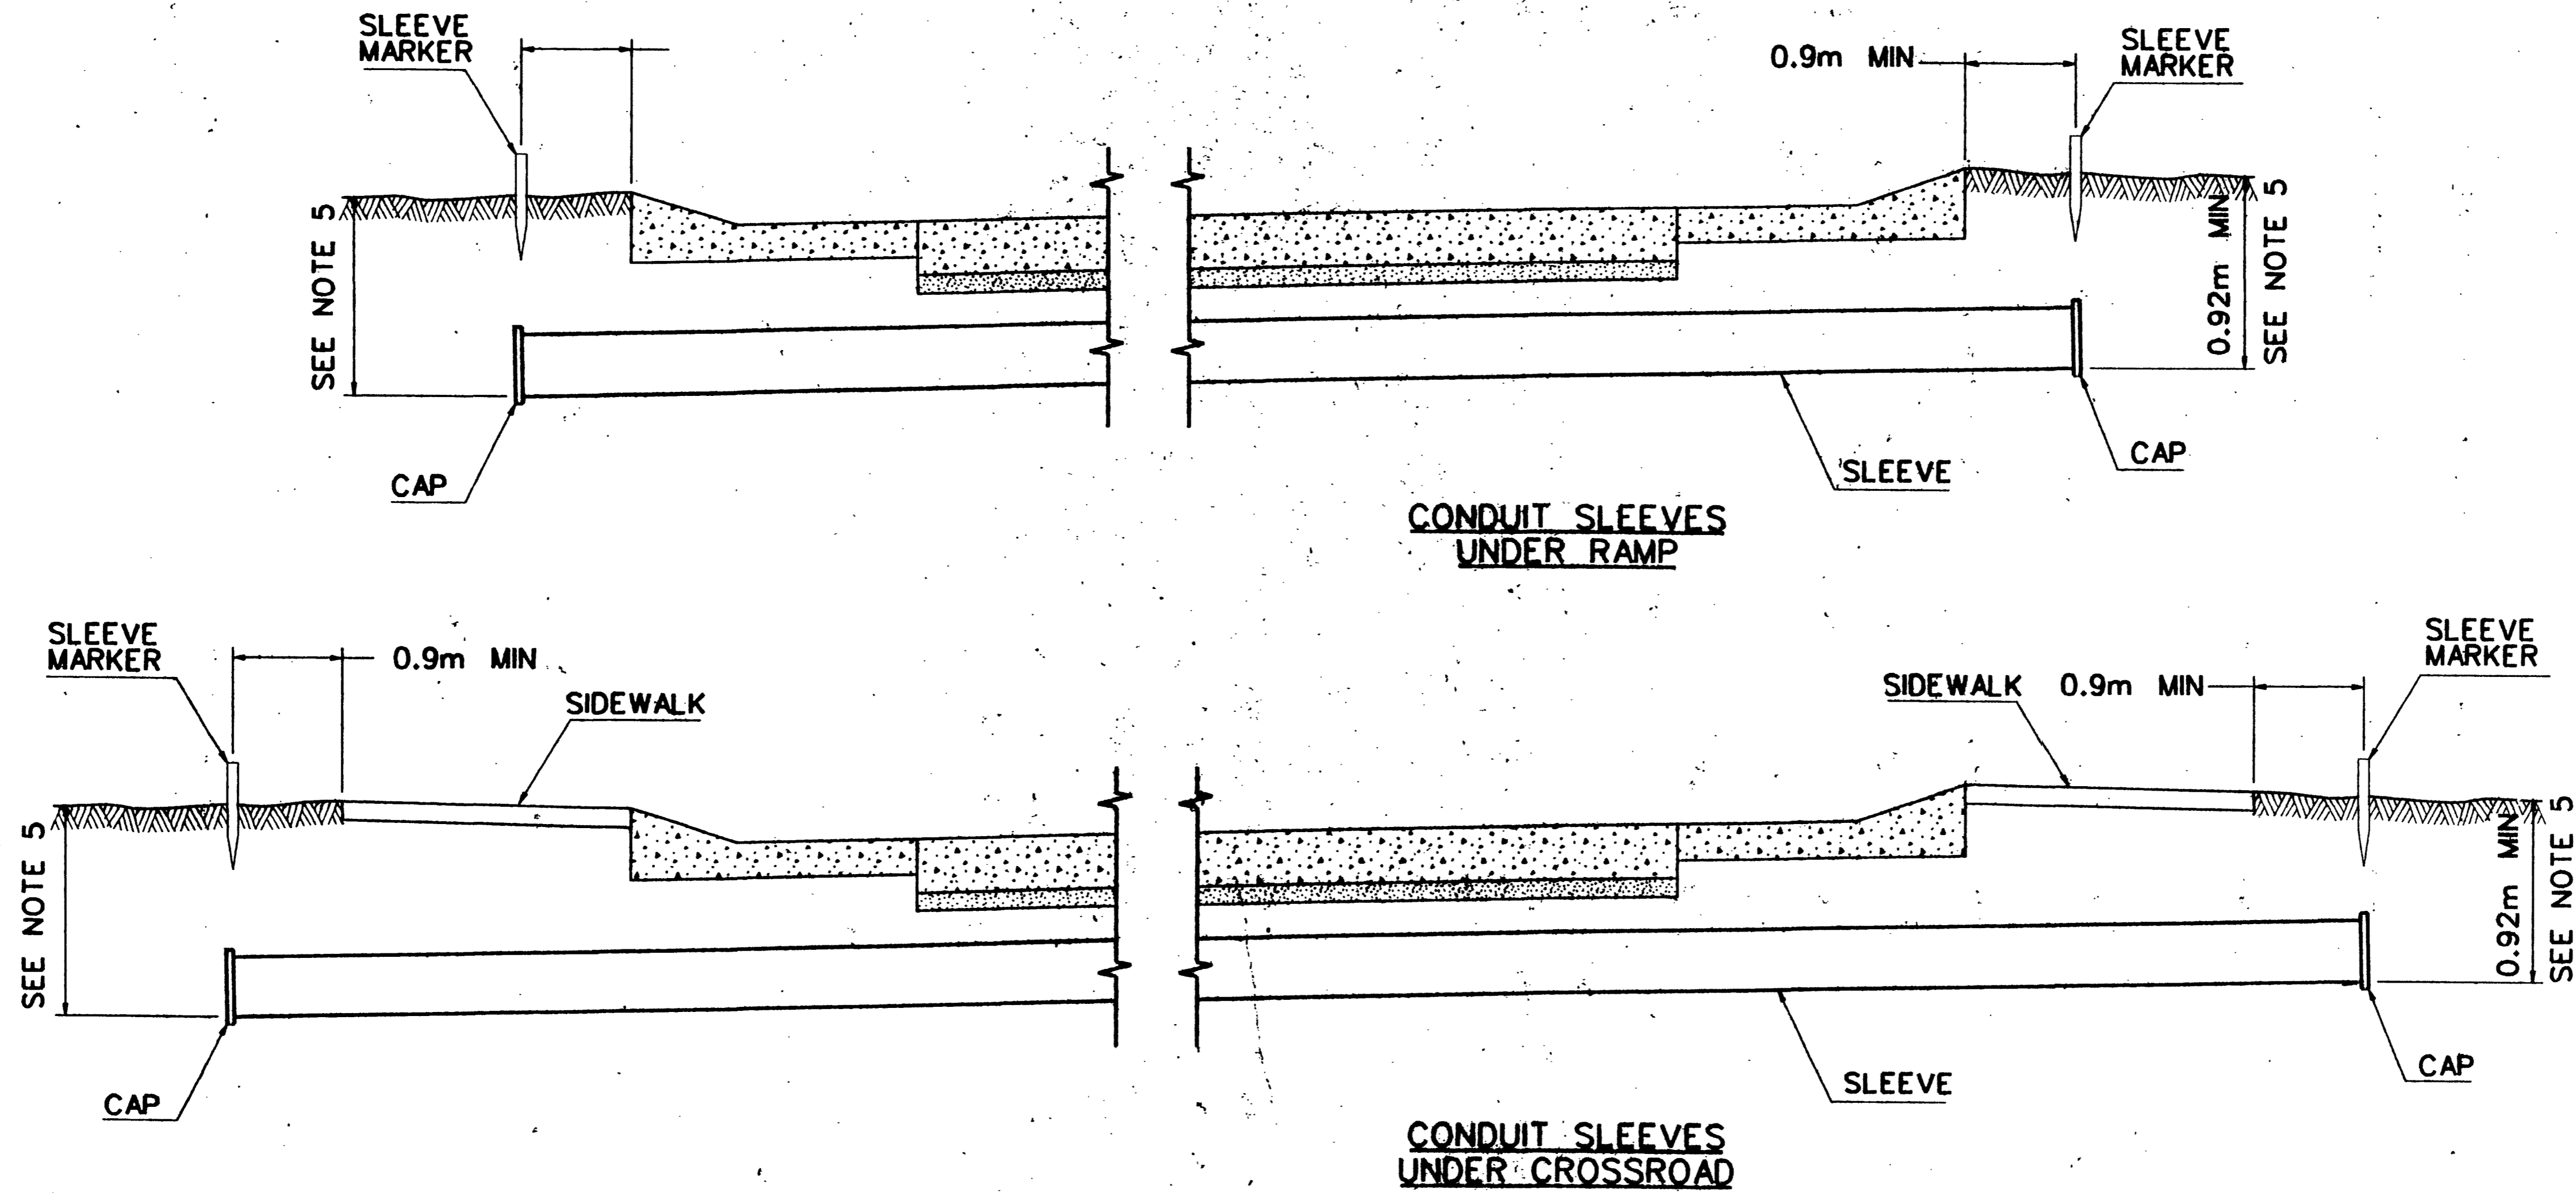

NOTES:

1. SLEEVES SHALL BE INSTALLED BY A METHOD APPROVED BY THE ENGINEER.
2. SLEEVE INSTALLATION SHALL CONFORM TO THE NDOT STANDARD SPECIFICATIONS.
3. SLEEVES SHALL BE BLACK STEEL PIPE.
4. SLEEVES SHALL HAVE A MINIMUM 0.25m INSIDE DIAMETER.
5. THE DEPTH OF SLEEVE INSTALLATION VARIES DEPENDING ON CONFLICTS WITH EXISTING UTILITIES AND OBSTRUCTIONS. THE CONTRACTOR SHALL DETERMINE THE REQUIRED DEPTH. THE MINIMUM DEPTH SHALL BE 0.92m.
6. SLEEVES SHALL BE NOMINALLY SLOPED TO DRAIN. SLOPE IN SUPER ELEVATED SECTIONS MAY APPROXIMATE ROADWAY CROSS-SLOPE.

DATE	
REVISIONS	
DESIGN BY	W.A. *
DATE	1500
FULL SCALE	1500
DATE	
HALF SCALE	11000
F.L.D. No. *	
Kimley-Horn and Associates, Inc. Engineering, Planning, and Environmental Consultants © 1993	
DEPARTMENT OF PUBLIC WORKS I-15 FREEWAY CHANNEL ITS INFRASTRUCTURE CONDUIT SLEEVE INSTALLATION	
DRAWING NO.	IT-5