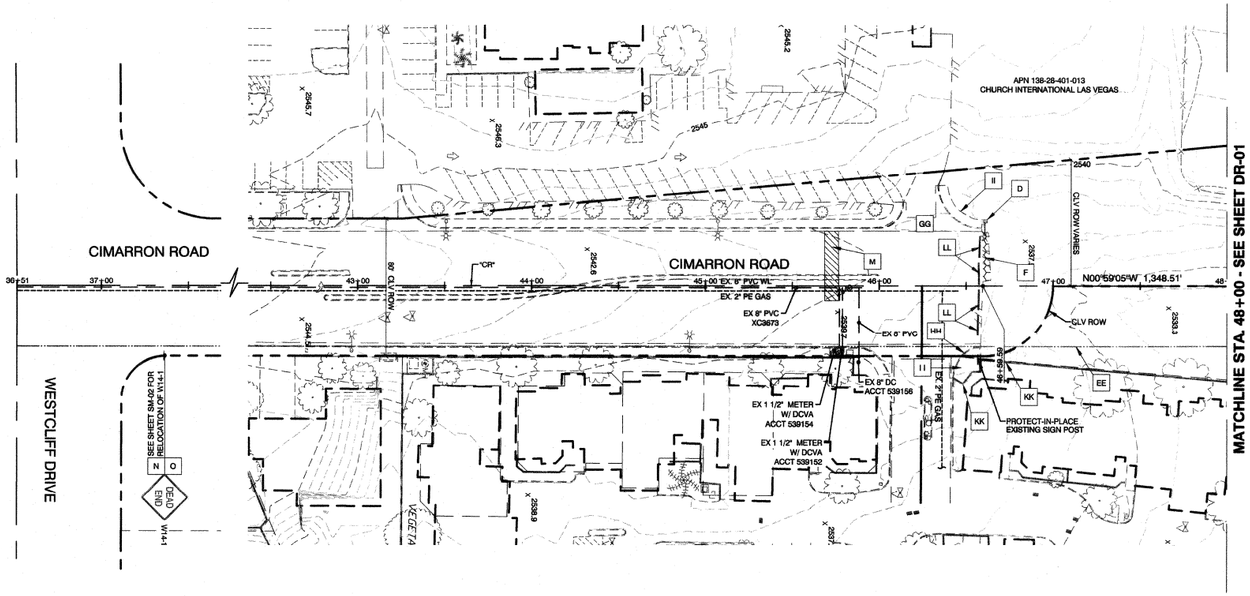

PROTECT IN PLACE AND ADJUST LVVWD EXISTING FACILITIES TO FINISHED GRADE. ALL LVVWD FACILITIES SHALL BE ACCESSIBLE AT ALL TIMES.
ESN. 078 01/05/15

APPROVED FOR CONSTRUCTION
LAS VEGAS VALLEY WATER DISTRICT ENGINEERING SERVICES MANAGER
DATE: 1/17/18 PROJECT# 125044
SHEETS: CV-00, GN-01, GN-02, GN-03, DR-02, UT-01

NORTH

GRAPHIC SCALE
40 0 20 40 80
(IN FEET)

CALL BEFORE CONSTRUCTION

BEFORE YOU DIG	USA NORTH	811 OR 800-227-2600
BEFORE YOU UNDERGROUND	F.A.S.T.	702-432-5300
	CLARK COUNTY TRAFFIC OPERATIONS	702-455-7511
	CITY OF LAS VEGAS T.E.F.O.	702-229-6611
BEFORE YOU OVERHEAD	NV ENERGY	702-227-2929

DEMOLITION NOTES

- AA PROTECT-IN-PLACE EX 6' CHAIN LINK FENCE
- BB PROTECT-IN-PLACE EX CONCRETE SCREEN WALL
- CC PROTECT IN PLACE EX IRRIGATION VALVE BOX
- DD REFER TO NV ENERGY FOR RELOCATION
- EE PROTECT-IN-PLACE EX BURIED ELECTRICAL
- FF PROTECT-IN-PLACE EX AREA LIGHT
- GG PROTECT-IN-PLACE EX CROSS GUTTER
- HH PROTECT-IN-PLACE EX CURB AND GUTTER
- II PROTECT-IN-PLACE EX SIDEWALK
- JJ PROTECT IN PLACE EX UTILITY BOX/VAULT (NOT USED)
- KK PROTECT-IN-PLACE EX WALL
- LL RESET BARRIERS AS SHOWN ON SHEET SM-02. EXTRA BARRIERS TO BE SALVAGED TO THE OWNER. COORDINATE WITH STREETS AT 702-229-6227.
- A REMOVE & DISPOSE OF EX 6' CHAIN LINK FENCE
- B REMOVE & DISPOSE OF EX SANITARY SEWER MANHOLE
- C REMOVE & DISPOSE EX SANITARY SEWER (SEE SHEET SS-01)
- D REPLACE EXISTING STREETLIGHT FIXTURE HEAD WITH 400W LED-EQUIVALENT LUMINAIRE PER SPECIAL PROVISION SECTION 623L.02.03
- E REMOVE & DISPOSE EX TREE / BRUSH / LANDSCAPING
- F SAWCUT EXISTING ASPHALT PAVEMENT AS SHOWN. REMOVE AND DISPOSE OF EXISTING ASPHALT AND AGGREGATE BASE TO LIMITS OF NEW CONSTRUCTION PER GRADING PLANS.
- G REMOVE EXISTING NVE MANHOLE AND CONDUIT PER NV ENERGY DRAWINGS
- J RELOCATE PER UTILITY PLAN (SHEET UT-01). NEW CONNECTION MUST BE IN PLACE PRIOR TO SPLICING. COORDINATE WITH FAST.
- K REMOVE & DISPOSE OF EX CONCRETE CURB, GUTTER, AND SIDEWALK (NOT USED)
- L REMOVE EXISTING STREET LIGHT ASSEMBLY AND FOUNDATION TO A MINIMUM OF 24 INCHES BELOW GRADE. SALVAGE AND RETURN EXISTING POLES AND APPURTENANCES TO THE CLV.
- M 8-FOOT WIDE TRANSVERSE PATCH AT PROPOSED UTILITY TRENCH LOCATION PER UNIFORM STANDARD DRAWING NO. 500.5 (SEE SHEET UT-01). REMOVE AND REPLACE MEDIAN ISLAND PER UNIFORM STANDARD DRAWING NO. 218.
- N REMOVE AND RELOCATE EX TRAFFIC SIGN
- O REMOVE EX SIGN POST

FEDERAL PROJECT NUMBER: CM-0003(180)

NO.	DATE	REVISIONS

PREPARED BY
DEPARTMENT OF PUBLIC WORKS
CAPITAL PROJECT MGMT

POGGEMEYER DESIGN GROUP
6950 Smoke Ranch Road - Suite 110
Las Vegas, Nevada 89128 - (702) 255-8100

PREPARED FOR
CITY OF LAS VEGAS

H# 48938 BID# 17.48938
DATE: JANUARY 2018 DESIGNED BY: MAS
SUBMITTAL STAGE: 100% FINAL DRAWN BY: MAS
CHECKED BY: AP

TITLE
CIMARRON PEDESTRIAN BRIDGE AT SUMMERLIN PARKWAY

SHEET
DEMOLITION PLAN
CIMARRON ROAD

PROFESSIONAL ENGINEER - STATE OF NEVADA
ADAM P. PILARZ
Exp. 12-31-18
CIVIL
No. 21404

SHEET
DR-02
10 OF 86
DRAWING NO.
076-22

PROJ.#:125044 AGREE#:116229 QS:138-28-SW

12/27/17 G:\14078 CIMARRON PEDESTRIAN BRIDGE\H48938\SHEET SET\DWG\H48938-02-DR00.DWG