

### TRAIL CONSTRUCTION SCHEDULE

TRAIL AMENITIES		QTY. **	DESCRIPTION	DETAILS	SHEET
HS-1	ASPHALTIC CONCRETE TRAIL	6,629 S.F.	NEW ASPHALTIC CONCRETE TRAIL. SEE CIVIL DRAWINGS FOR DETAILS AND STRIPING.		

\* ALL QUANTITIES SHOWN ARE APPROXIMATE. CONTRACTOR TO VERIFY QUANTITIES.

### TRAIL CONSTRUCTION NOTES

- CONTRACTOR SHALL OBTAIN AND COORDINATE ALL NECESSARY PERMITS, INSPECTIONS AND APPROVALS REQUIRED FOR THIS WORK. ALL CONSTRUCTION SHALL BE PERFORMED ACCORDING TO LOCAL CODES AND ORDINANCES.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE ACCURATE LAYOUT OF THE PROJECT. FOR ESTABLISHING ALL REFERENCE POINTS AND MARKERS FOR CONSTRUCTION. SEE CIVIL DRAWINGS FOR HORIZONTAL CONTROL, GRADING AND UTILITY DRAWINGS. VERIFY ALL EXISTING CONDITIONS PRIOR TO CONSTRUCTION. BRING ALL DISCREPANCIES TO THE ATTENTION OF THE CONSTRUCTION MANAGER PRIOR TO CONSTRUCTION.
- VERIFY THE LOCATIONS OF ALL UNDERGROUND UTILITIES AND SERVICES PRIOR TO ANY EXCAVATION OR CONSTRUCTION. CONTRACTOR TO COORDINATE WITH OFF-SITE IMPROVEMENTS AND UTILITIES, INCLUDING STREET LIGHTING. CONTRACTOR ASSUMES FULL RESPONSIBILITY FOR ALL DAMAGE CAUSED BY THE FAILURE TO DO SO.

### PLANTING LEGEND


TREES	SYMBOL	BOTANICAL NAME COMMON NAME	QTY.	CALIPER MINIMUM SIZE
		CELTIS RETICULATA CANYON HACKBERRY STANDARD TRUNK	7	1-1/2" 24" BOX
		PROSOPIS GLANDULOSA TEXAS HONEY MESQUITE THORNLESS MULTI-TRUNK	4	1-1/2" 24" BOX

SHRUBS	SYMBOL	BOTANICAL NAME COMMON NAME	QTY.	MINIMUM SIZE
		CAESALPINIA PULCHERRIMA RED BIRD OF PARADISE	11	5 GALLON
		DALEA FRUTESCENS 'SIERRA NEGRA' TM BLACK DALEA	20	5 GALLON
		DASYLIRION WHEELERI DESERT SPOON	16	5 GALLON
		ENCELIA FARINOSA BIRTLBUSH	11	5 GALLON
		EREMOPHILA MACULATA 'VALENTINE' BIRD BUSH	11	5 GALLON

LANDSCAPE ELEMENTS		QTY.	DETAIL
	DECORATIVE ROCK. SIZE: 6"-12" COLOR: GOLD INSTALL IN AREAS TO RECEIVE 6" MINIMUM DEPTH LAYER UNLESS OTHERWISE NOTED. SEE NOTE #2.	11,816 SF.	F' L1.03
	LANDSCAPE GRANITE BOULDERS IN AREAS TO RECEIVE 6" DEPTH LAYER UNLESS OTHERWISE NOTED. SEE NOTE #2. COLOR TO MATCH DECORATIVE ROCK.	40 TOTAL	B' L1.03
	BOULDER SCHEDULE		
	SYMBOL	SIZE	QUANTITY
	A	3'X3'X2'	13
	B	3'X2'X2'	12
	C	2'X2'X2'	15
	6" WIDE X 6" TALL CONCRETE MOW CURB.	185 L.F.	H' L1.03

### PLANTING NOTES

- SEE SHEET L1.03 FOR PLANTING DETAILS.
- DECORATIVE ROCK (DR) - INSTALL THE MINIMUM LAYER OF DECORATIVE ROCK IN ALL LANDSCAPE AREAS WITHIN LANDSCAPE LIMIT OF WORK EXCEPT WHERE OTHERWISE NOTED. CONTRACTOR TO VERIFY THE SHOWN QUANTITIES FOR APPROVAL PRIOR TO CONSTRUCTION. CONTRACTOR TO APPLY SUBGRADE TO 85% AND APPLY PRE-EMERGENT HERBICIDE TO SOIL. AFTER PLACING ROCK, WET TO ENTIRE DEPTH. ALLOW TO DRY. APPLY A SECONDARY APPLICATION OF PRE-EMERGENT HERBICIDE TO TOP OF ROCK. DO NOT ALLOW ROCK TO TOUCH THE TRUNK OF ANY TREE. TO BE INSTALLED AFTER INSTALLATION OF PLANT MATERIAL.
- ANY TREE PLANTED WITHIN 5 FEET OF A SIDEWALK OR WALL SHALL BE PLANTED WITH A ROOT GUARD DESIGNED TO DIRECT ROOT GROWTH DOWNWARD. SEE DETAIL 'E', SHEET L1.03.
- CONTRACTOR TO PROTECT IN PLACE EXISTING UTILITIES. CONTRACTOR TO VERIFY ALL UTILITIES PRIOR TO CONSTRUCTION. CONTRACTOR TO USE CAUTION. CALL BEFORE YOU DIG AND CALL BEFORE YOU OVER HEAD.

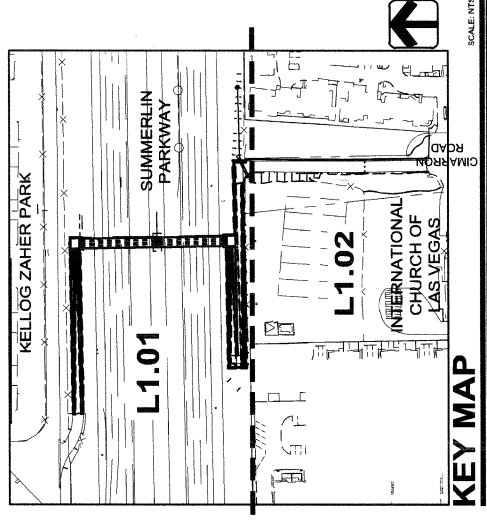

KEY MAP

TITLE  
CITY OF LAS VEGAS  
DEPARTMENT OF  
PUBLIC WORKS  
CAPITAL PROJECT MGMT

PREPARED FOR

DATE: JANUARY 2018  
SUBMITTAL STAGE: 100% FINAL

DESIGNED BY: MED  
DRAWN BY: MED  
CHECKED BY: SMS

#H 48938  
BID# 17.48938

REVISIONS

LANDSCAPE LEGEND  
AND NOTES

SHEET  
**L1.00**  
63 OF 86  
DRAWING NO.  
**676-22**

REGISTERED ARCHITECT  
STATE OF NEVADA  
1985

PREPARED BY  
SOUTHWICK  
LANDSCAPE ARCHITECTS  
7730 W. HIGHLAND BLVD., SUITE 200  
LAS VEGAS, NV 89118  
702.272.1100  
WWW.SOUTHWICK.COM