

1 PROPOSED 2" PE SERVICE



2 PROPOSED 2" PE FULL FLOW TEE #140-3074

1. SUGGESTED GAS LOCATIONS ARE TO CLEAR SUBSTRUCTURES LOCATE IN FIELD.
2. ALL PIPELINE CONSTRUCTION SHALL CONFORM TO APPLICABLE JURISDICTION SPECIFICATIONS.
3. DO NOT SCALE THIS DRAWING.
4. CHANGE IN PROPOSED MAIN LOCATION MUST BE AUTHORIZED BY SWG ENGINEER PRIOR TO INSTALLATION.
5. GAS MAINS SHALL BE PURGED PER OPERATIONS MANUAL.
6. ALL MAIN TIE-INS REQUIRING TEES ARE TO BE FULL FLOW TEES UNLESS OTHERWISE STATED.
7. TRENCHING AND BACKFILL TO CONFORM WITH UNIFORM STANDARD SPECS. SECTION 208, AND RTC STANDARD(s) 503 AND 500.2

PAVEMENT REPAIR AND / OR BACKFILL SHALL CONFORM TO RTC:

A1 500.2

A2 503

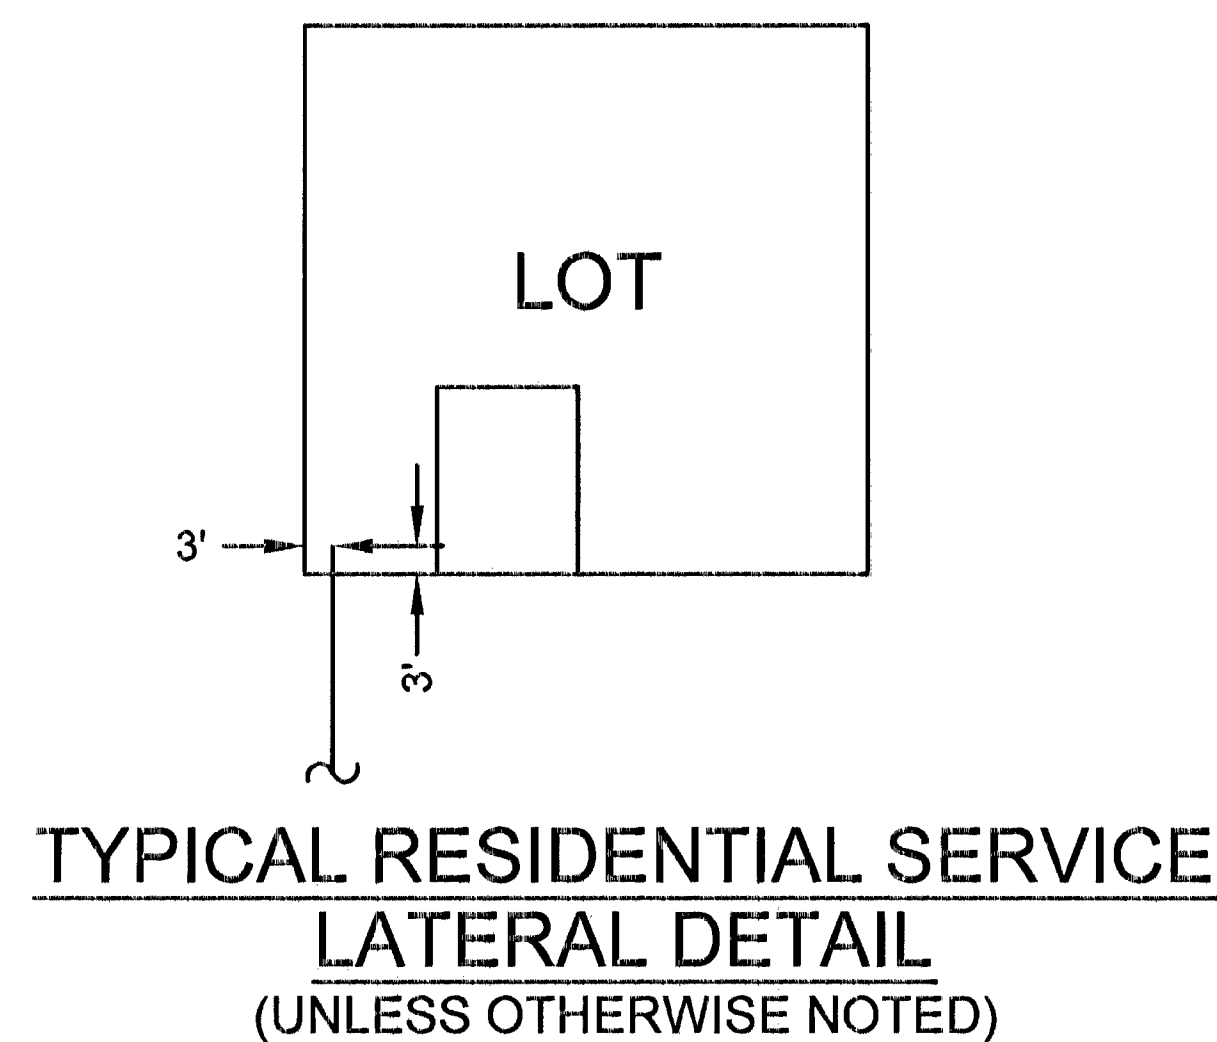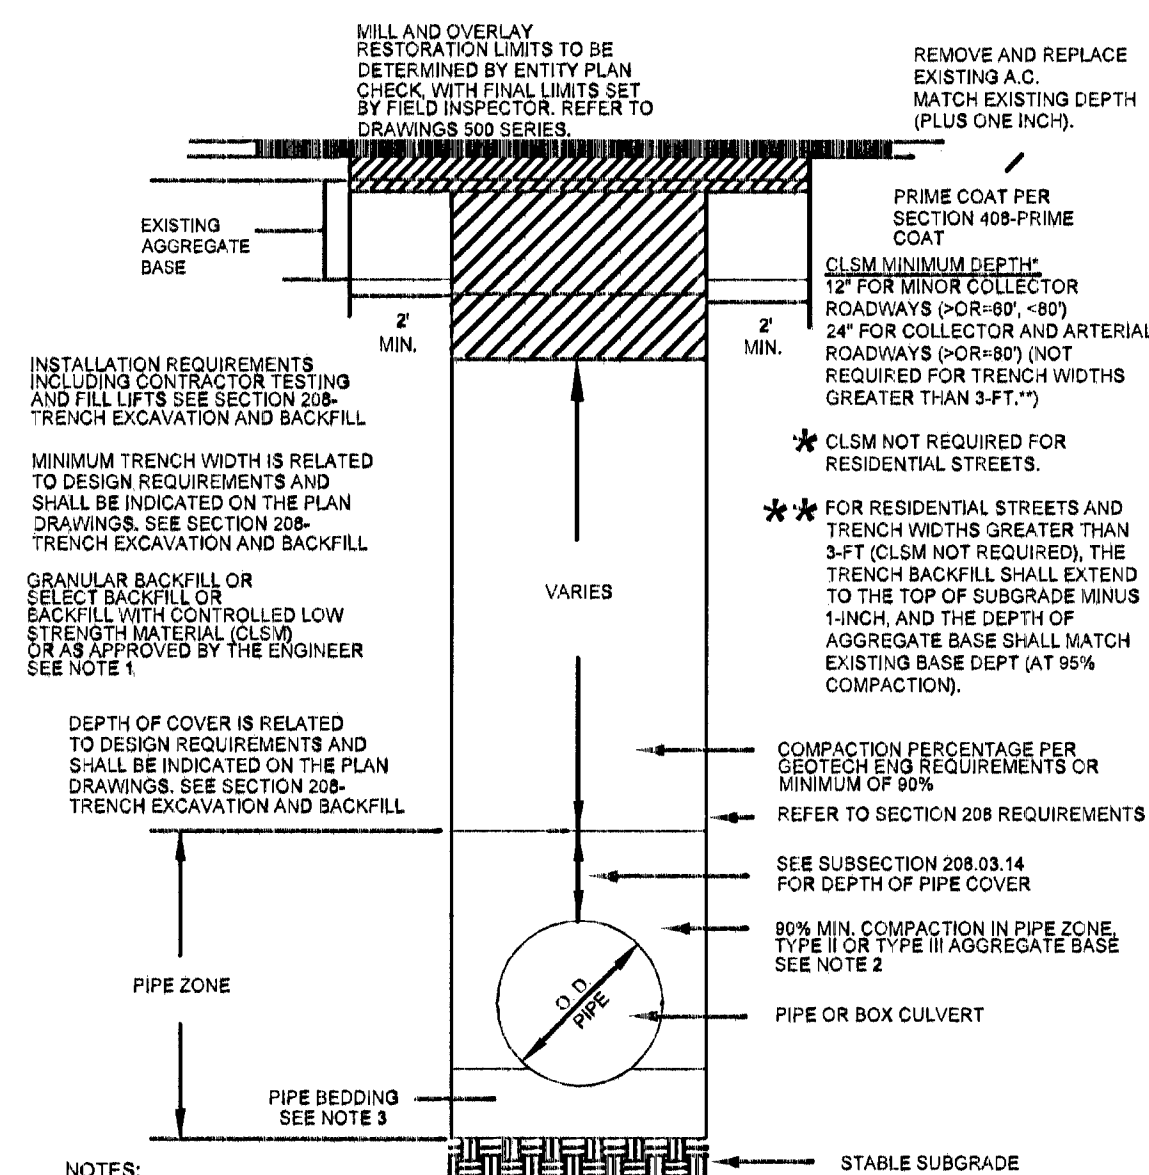

SYSTEM	D_VALLEY_WIDE
DR. NO.	21DR10002377
SEGMENT M.A.O.P.	N/A
SYSTEM M.A.O.P.	43 PSIG
SYSTEM M.O.P.	43 PSIG

PURGE PLAN WAS COMPLETED IN ACCORDANCE
WITH THE OPERATIONS MANUAL GUIDELINES BY:

PRINT: _____ DATE: _____

SIGNATURE: _____

RTC STD DWG 503

[illegible]