Improvement Drawings for ASCOT PARK

General Notes

1. ALL CONSTRUCTION AND MATERIALS SHALL BE IN ACCORDANCE WITH THE "UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION OFF-SITE IMPROVEMENTS, CLARK COUNTY AREA NEVADA", LATEST ISSUE; THE "UNIFORM STANDARD DRAWINGS FOR PUBLIC WORKS CONSTRUCTION, CLARK COUNTY AREA NEVADA", LATEST ISSUE; ANY OTHER APPLICABLE APPROVED STANDARDS ISSUED BY THE CONTROLLING AGENCY; THE UNIFORM BUILDING CODE; AND ALL LOCAL CITY CODES AND ORDINANCES APPLICABLE. EXCEPT AS NOTED ON THIS SHEET.

2. THE EXISTENCE AND LOCATION OF ANY UNDERGROUND UTILITY PIPES OR STRUCTURES SHOWN ON THESE PLANS ARE OBTAINED BY A SEARCH OF THE AVAILABLE RECORDS. THE CONTRACTOR IS REQUIRED TO TAKE PRECAUTIONARY MEASURES TO PROTECT THE UTILITY LINES SHOWN AND ANY OTHER LINES NOT OF RECORD OR NOT SHOWN ON THESE DRAWINGS. EXISTING UTILITIES ARE LOCATED ON PLANS ONLY FOR THE CONVENIENCE OF THE CONTRACTOR. EXISTING UTILITY SERVICE LATERALS ARE NOT SHOWN ON THE PLANS.

3. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONARY MEASURES NECESSARY TO PROTECT EXISTING IMPROVEMENTS WHICH ARE TO REMAIN IN PLACE, FROM DAMAGE, AND ALL SUCH IMPROVEMENTS OR STRUCTURES DAMAGED BY THE CONTRACTOR'S OPERATIONS SHALL BE REPAIRED OR RECONSTRUCTED SATISFACTORY TO THE OWNER AT THE EXPENSE OF THE CONTRACTOR.

4. THE CONTRACTOR SHALL NOT BACKFILL ANY TRENCHES IN WHICH WATERLINES HAVE BEEN UNCOVERED UNTIL THE WATERLINES HAVE BEEN INSPECTED BY THE LAS VEGAS VALLEY WATER DISTRICT. THE WATER DISTRICT SHALL BE NOTIFIED 48 HOURS IN ADVANCE OF CONSTRUCTION IN THE VICINITY OF WATER LINES.

5. ALL CONSTRUCTION SHALL BE AS SHOWN ON THESE PLANS, ANY ALTERATIONS SHALL HAVE THE PRIOR WRITTEN APPROVAL OF THE CITY ENGINEER.

6. TYPE V CEMENT SHALL BE USED IN ALL OFF-SITE CONCRETE WORK. CONCRETE TO BE DESIGNED FOR A 5.5 SACK MIX WITH A MAXIMUM WATER/CEMENT RATIO OF 0.45 (OR AS DESIGNATED BY THE SOILS ENGINEER). MIX DESIGN TO BE APPROVED BY THE QUALITY CONTROL DIVISION PRIOR TO USE ON THE PROJECT.

7. THE CONTRACTOR SHALL, AT HIS OWN EXPENSE, LOCATE ALL OVERHEAD INTERFERENCES WHICH MAY AFFECT HIS OPERATION DURING CONSTRUCTION AND SHALL TAKE ALL NECESSARY PRECATIONS TO AVOID DAMAGE TO SAME. THE CONTRACTOR SHALL USE EXTREME CAUTION WHEN WORKING NEAR OVERHEAD OR UNDERGROUND POWER AND/OR TELEPHONE FACILITIES SO AS TO SAFELY PROTECT ALL PERSONNEL AND EQUIPMENT, AND SHALL BE RESPONSIBLE FOR ALL COSTS AND LIABILITY IN CONNECTION THEREWITH.

8. PERMITS ARE REQUIRED FOR ANY WORK IN THE PUBLIC RIGHT OF WAY. THE CONTRACTOR SHALL SECURE ALL PERMITS AND INSPECTIONS REQUIRED FOR THIS CONSTRUCTION.

9. EXPANSION JOINTS REQUIRED, MAXIMUM EVERY 300' IN EXTRUDED CURB.

10. AC PAVEMENT TO BE 1/2" ABOVE LIP OF ALL GUTTER & VALLEY GUTTER AFTER COMPACTION.

11. APPLY FOG SEAL ONLY AFTER ALL CORRECTIONS AND ADJUSTMENTS HAVE BEEN MADE.

12. CURB & GUTTER WITH A GRADE OF LESS THAN FOUR TENTHS OF ONE PERCENT SHALL BE CONSTRUCTED BY FORMING. EACH JOINT SHALL BE CHECKED FOR GRADE PRIOR TO CONSTRUCTION AND WATER TESTED AS SOON AS POSSIBLE AFTER CONSTRUCTION.

13. WHEELCHAIR RAMPS SHALL BE CONSTRUCTED IN EACH QUADRANT OF AN INTERSECTION PER STANDARD DRAWING 235. EXACT LOCATION OF RAMPS MAY BE ADJUSTED IN THE FIELD BY A CITY INSPECTOR.

14. CONTRACTOR SHALL PROVIDE ALL NECESSARY HORIZONTAL AND VERTICAL TRANSITIONS BETWEEN NEW CONSTRUCTION AND EXISTING SURFACES TO PROVIDE FOR PROPER DRAINAGE AND FOR INGRESS AND EGRESS TO SAID CONSTRUCTION. EXTENT OF TRANSITIONS TO BE AS SHOWN ON PLANS, OR AS DESIGNATED IN THE FIELD BY A CITY INSPECTOR.

15. ALL GRADING WORK SHALL CONFORM TO THE SOILS REPORT AS PREPARED BY THE SOILS ENGINEER AND APPROVED BY THE CITY ENGINEER.

16. EXACT LOCATION OF ALL SAW CUT LINES MAY BE DETERMINED IN THE FIELD BY A CITY OF LAS VEGAS INSPECTOR IF LOCATION ON PLANS IS NOT CLEARLY SHOWN, OR EXISTING PAVEMENT CONDITION REQUIRED RELOCATION.

17. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONS NECESSARY TO PROTECT EXISTING PERMANENT SURVEY MONUMENTS. ANY MONUMENTS DISTURBED SHALL BE REPLACED AND ADJUSTED PER AVAILABLE RECORDS IN ACCORDANCE WITH N.R.S. STATUTE NO. 625.550.

QUANTITY ESTIMATE

PAVING / DRAINAGE QUANTITIES

3" A.C. PAVEMENT	0
2" A.C. PAVEMENT	46332SY
TYPE II AGGREGATE	5097 CY
TYPE I AGGREGATE	7722CY
ROLL TYPE C. & G.	Ø
"L" TYPE C. & G.	19305LF
"A" TYPE CURB	280 LF
VALLEY GUTTER	8530 SF
5.0' SIDEWALK	96525 SF

Sheet Index

1...COVER SHEET
2...DETAIL SHEET
3...GRADING PLAN
4...GRADING PLAN
5...GRADING PLAN
6...STREET & SEWER PLAN & PROFILE CHAPARRAL SUMMIT DRIVE
7...STREET & SEWER PLAN & PROFILE CHAPARRAL SUMMIT DRIVE
8...STREET & SEWER PLAN & PROFILE NORTHERN DANCER DRIVE
9...STREET & SEWER PLAN AND PROFILE COUNTRY HOLLOW DRIVE
10..STREET & SEWER PLAN & PROFILE HITCHING RAIL DRIVE
11..STREET & SEWER PLAN & PROFILE DERBY HILL CIRCLE, ENGLISH SADDLE CIRCLE
12..STREET & SEWER PLAN & PROFILE LOST COLT CIRCLE, POLO CIRCLE
13..STREET & SEWER PLAN & PROFILE HORSE BACK CIRCLE, BOOT STRAP CIRCLE
14..STREET & SEWER PLAN & PROFILE UNBRIDLED CIRCLE, SADDLE ROCK CIRCLE, GOLDENSPUR LN.
15..STREET & SEWER PLAN & PROFILE TRAIL RIDER DRIVE
16 STREET & SEWER PLAN & PROFILE GOLDENSPUR LANE
17...MASTER SEWER PLAN
18...MASTER WATER PLAN
19...MASTER WATER PLAN
20..MASTER WATER PLAN
21..MASTER LIGHTING PLAN

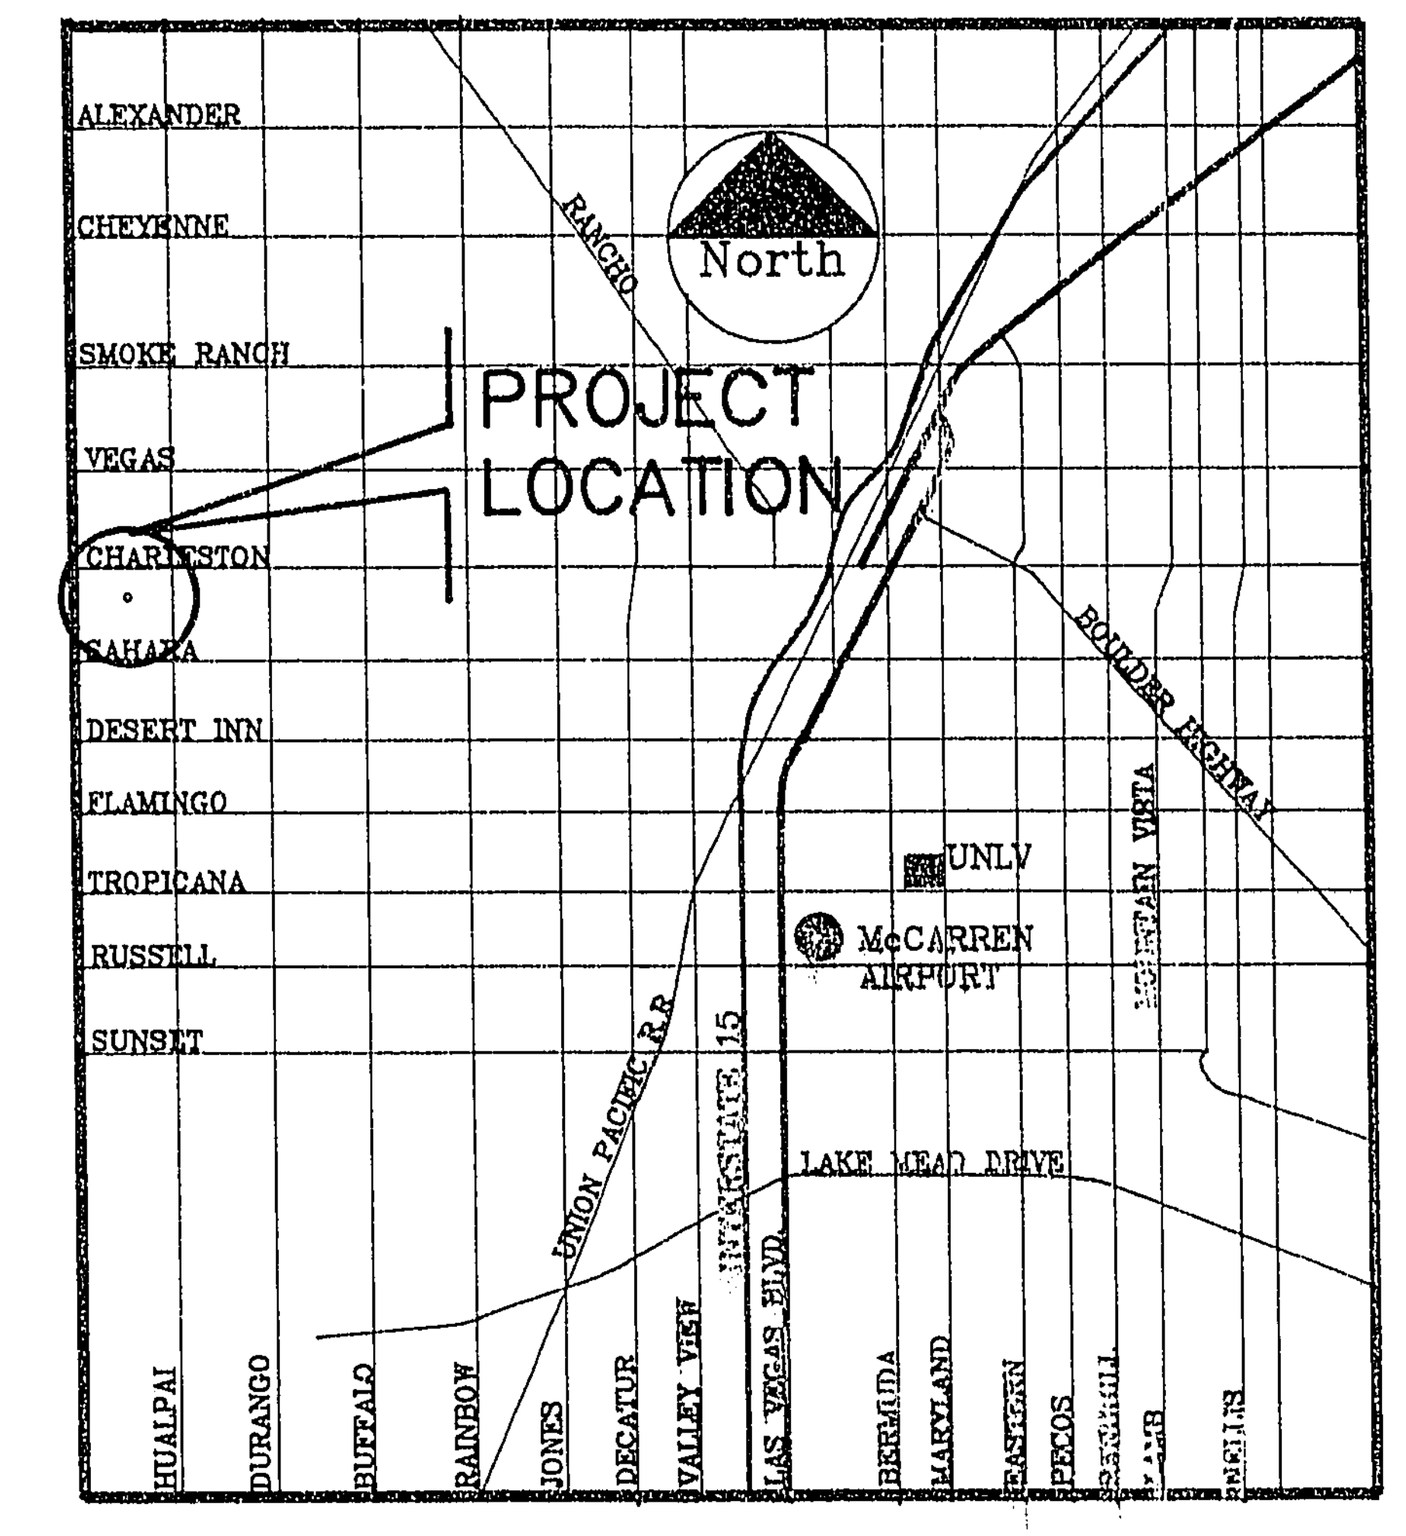

Location Map

DEVIATIONS FROM S... ...

1. SIDEWALK TO BE CONSTR... SIDE OF THE ... ONLY

2. MODIFIED STD DET #205, ... MEDIAN PER STD DET # 215 W/ LANDSCAPED INTERIOR

3. SIDEWALK ... ONE SIDE OF STD DET #206

4 ALL INTERIOR ... ARE PRIVATE.

City of Las Vegas, Nevada

APPROVED BY:

12-4-90

CITY OF LAS VEGAS DATE
GARY A. PRESSWOOD P.E. CITY ENGINEER

LEGAL DESCRIPTION

LOT 10 OF PECCOLE RANCH SUBDIVISION AS RECORDED IN BOOK 44, AT PAGE 72 OF PLATS, CLARK COUNTY RECORDS: OF SECTION 6, T. 21 S., R. 60 E., M.D.B. & M., CITY OF LAS VEGAS, COUNTY OF CLARK, STATE OF NEVADA.

BASIS OF BEARING

N 89 41' 18" E BEING THE NORTH LINE OF THE NORTHEAST QUARTER OF SEC. 6 T. 21 S., R. 60 E., M.D.M., CITY OF LAS VEGAS, CLARK COUNTY, NEVADA AS SHOWN BY A MAP ON FILE IN THE OFFICE OF THE COUNTY RECORDER IN FILE 36 OF RECORDS OF SURVEYS, PAGE 89

BENCHMARK

CLARK COUNTY BENCHMARK CIONE05, B.L.M. BRASS CAP IN CHARLESTON BLVD. LOCATED 55 FEET WEST, 50 FEET NORTH OF THE NORTHWEST CORNER OF FENCED IN NEVADA POWER YARDELEVATION = 2663.94 CLARK COUNTY DATUM

Developer

TAYLOR WOODROW HOMES, NEVADA, LTD.
3900 PARADISE ROAD
SUITE 287
LAS VEGAS, NEVADA 89109
PHONE: 702-794-4412

NO.	DATE	BY	REVISION DESCRIPTION
1	10/21/90	WW	REVISED PER CITY MARKUPS

DATE 8/13/90

SOUTHWEST ENGINEERING
LAND PLANNING•MAPPING•DEVELOPMENT
5426 W. VEGAS DRIVE
LAS VEGAS, NEVADA 89108
PHONE (702) 648-9700

TITLE: COVER SHEET
PROJECT: ASCOT PARK

WORK ORDER NO: 890619
DESIGN BY: CHILDS
DATE: 5-90
SCALE: NONE
SHEET 1 OF 21 SHEETS

10-14-94 107Y-4150