


SEC. 14.2.4
PUBLIC SIDEWALK
CURB RAMPS

PUBLIC SIDEWALK CURB RAMPS SHALL BE PERPENDICULAR TO THE CURB AT STREET CROSSINGS AND EACH SHALL HAVE A LEVEL LANDING AT THE TOP.

SEC. 14.2.4(2)
TYPES OF PUBLIC
SIDEWALK CURB
RAMPS

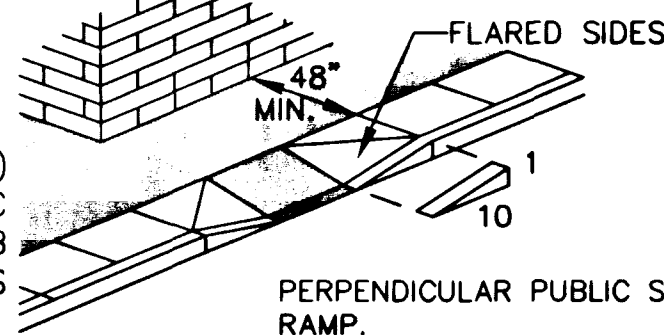

SEC. 4.8.7
EDGE
PROTECTION

WITH VERTICAL GUARDRAIL

WITH PROJECTING SURFACES

13

SECTION 4.8 RAMPS

SCALE: NONE

SEC. 14.2.6
VEHICULAR WAYS
AND FACILITIES

SEC. 14.2.6(3)
PASSENGER
LOADING ZONES

SEC. 14.2.6(3)(a)
SIGNAGE

SEC. 4.6.6
PASSENGER
LOADING ZONES

SECTION 4.6
PARKING AND PASSENGER LOADING ZONES


SCALE: NONE

17 SECTION 14 PUBLIC RIGHTS-OF-WAY


SCALE: NONE

SEC. 14.2.4
PUBLIC SIDEWALK
CURB RAMPS

SEC. 14.2.4(2)
TYPES OF PUBLIC
SIDEWALK CURB
RAMPS (TYPE B)

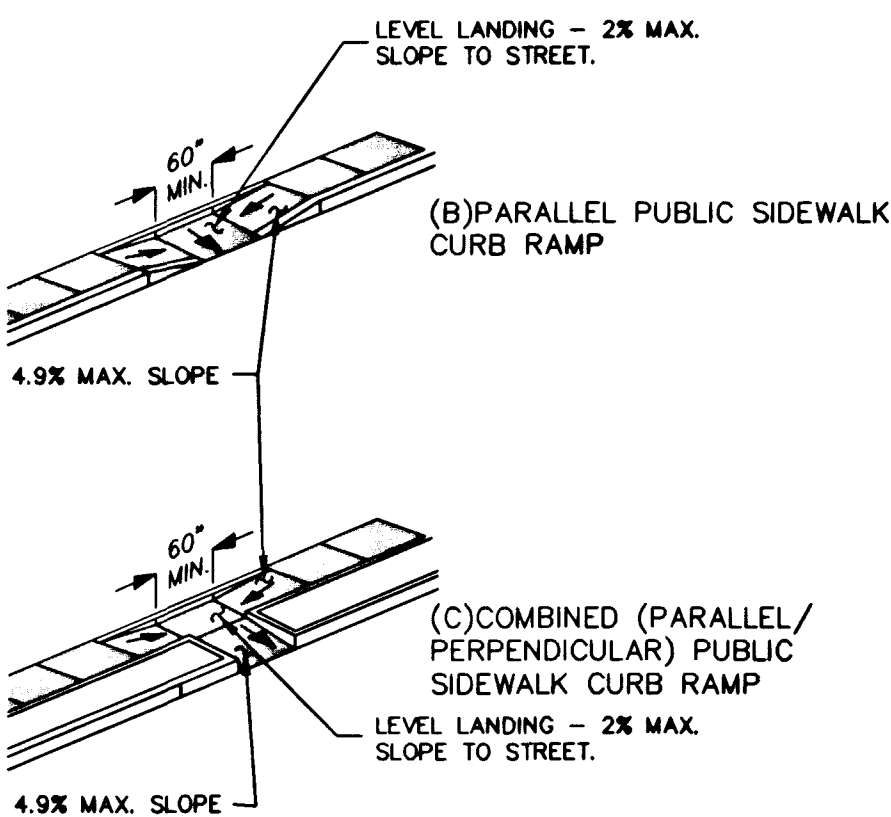

SEC. 4.29.5
DETECTABLE
WARNINGS AT
HAZARDOUS
VEHICULAR AREAS



DETECTABLE WARNINGS REQUIRED BY 4.1 AND 4.7 SHALL COMPLY WITH 4.29.

DETECTABLE WARNINGS AT HAZARDOUS VEHICULAR AREAS. IF A WALK CROSSES OR ADJOINS A VEHICULAR WAY, AND THE WALKING SURFACES ARE NOT SEPARATED BY CURBS, RAILINGS OR OTHER ELEMENTS BETWEEN THE PEDESTRIAN AREAS AND THE VEHICULAR AREAS, THE BOUNDARY BETWEEN THE AREAS SHALL BE DEFINED BY A CONTINUOUS DETECTABLE WARNING WHICH IS 36 IN. WIDE.

SEC. 4.8.1*
GENERAL

ANY PART OF AN ACCESSIBLE ROUTE WITH A SLOPE GREATER THAN 1:20 SHALL BE CONSIDERED A RAMP.

SEC. 4.8.2*
SLOPE AND RISE

THE MAXIMUM SLOPE OF A RAMP IN NEW CONSTRUCTION SHALL BE 1:12 (8.33%).

THE MAXIMUM RISE OF ANY RUN SHALL BE 30 IN.


THE MAXIMUM RUN OF ANY RAMP CAN BE 40 FEET WHEN THE SLOPE IS FROM 1:16 TO 1:20.

THE MAXIMUM RUN OF ANY RAMP CAN BE 30 FEET WHEN THE SLOPE IS FROM 1:12 TO 1:16.

18 SECTION 14 PUBLIC RIGHTS-OF-WAY

SCALE: NONE

SEC. 14.2.5
PEDESTRIAN STREET
CROSSINGS

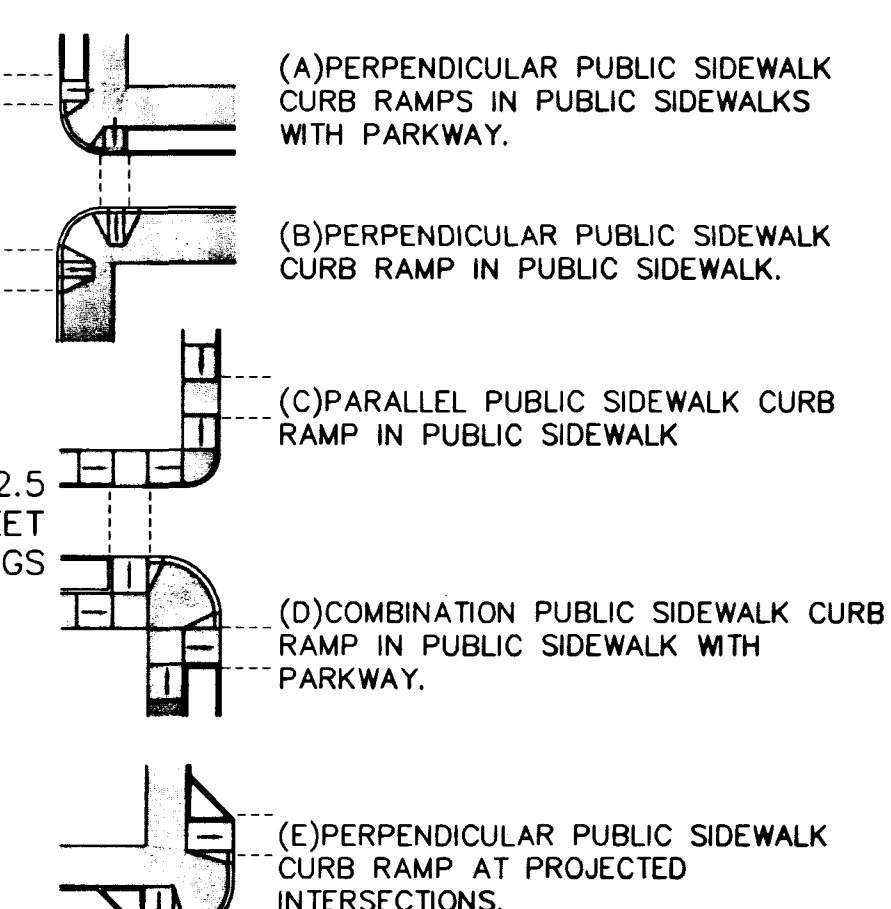

14

SECTION 4.8 RAMPS





SCALE: NONE

SEC. 4.30.1*
GENERAL

SEC. 4.30.2*
CHARACTER
PROPORTION

SEC. 4.30.5*
FINISH AND
CONTRAST

SEC. 4.30.7*
SYMBOLS OF
ACCESSIBILITY



FACILITIES AND ELEMENTS REQUIRED TO BE IDENTIFIED AS ACCESSIBLE BY 4.1 SHALL USE THE INTERNATIONAL SYMBOL OF ACCESSIBILITY.

18" x 24" SPECIAL HANDICAP SIGN (WHITE LETTERS ON HANDICAP BLUE BACKGROUND) WITH 1 1/2" LETTERS AND INTERNATIONAL HANDICAP SYMBOL.





18" x 6" ADVISORY PLATE WITH 2" LETTERS.

SPECIAL 18" x 6" HANDICAP SIGN ADVISORY PLATE WITH 2" LETTERS.

SPECIAL 18" x 6" HANDICAP SIGN ADVISORY PLATE WITH 2" LETTERS.

SPECIAL 18" x 6" HANDICAP SIGN DIRECTIONAL ARROW(S) 2"

SEC. 4.8.4*
LANDINGS



RAMPS SHALL HAVE LEVEL LANDINGS AT BOTTOM AND TOP OF EACH RAMP AND EACH RAMP RUN.

THE LANDING SHALL BE AT LEAST AS WIDE AS THE RAMP RUN LEADING TO IT.





THE LANDING LENGTH SHALL BE A MINIMUM OF 60 IN. CLEAR.

IF RAMPS CHANGE DIRECTION AT LANDINGS, THE MINIMUM LANDING SIZE SHALL BE 60 IN. BY 60 IN.

11 SECTION 4.8 RAMPS

SCALE: NONE

SEC. 4.8.5*
HANDRAILS



IF A RAMP RUN HAS A RISE GREATER THAN 6 IN. OR A HORIZONTAL PROJECTION GREATER THAN 72 IN., THEN IT SHALL HAVE HANDRAILS ON BOTH SIDES.

HANDRAILS SHALL BE PROVIDED ALONG BOTH SIDES OF RAMP SEGMENTS. THE INSIDE HANDRAIL ON SWITCHBACK OR DOGLEG RAMPS SHALL ALWAYS BE CONTINUOUS.

IF HANDRAILS ARE NOT CONTINUOUS, THEY SHALL EXTEND AT LEAST 12 IN. BEYOND THE TOP AND BOTTOM OF THE RAMP SEGMENT AND SHALL BE PARALLEL WITH THE FLOOR OR GROUND CLEARANCE.

THE CLEAR SPACE BETWEEN THE HANDRAIL AND THE WALL SHALL BE 1 1/2" IN.


TOP OF HANDRAIL GRIPPING SURFACES SHALL BE MOUNTED BETWEEN 34 IN. AND 38 IN. ABOVE RAMP SURFACES.

THE CROSS SLOPE OF RAMP SURFACES SHALL BE NO GREATER THAN 1:50.

19 SECTION 14 PUBLIC RIGHTS-OF-WAY

SCALE: NONE


SEC. 14.2.5(2)*
MARKED
CROSSINGS

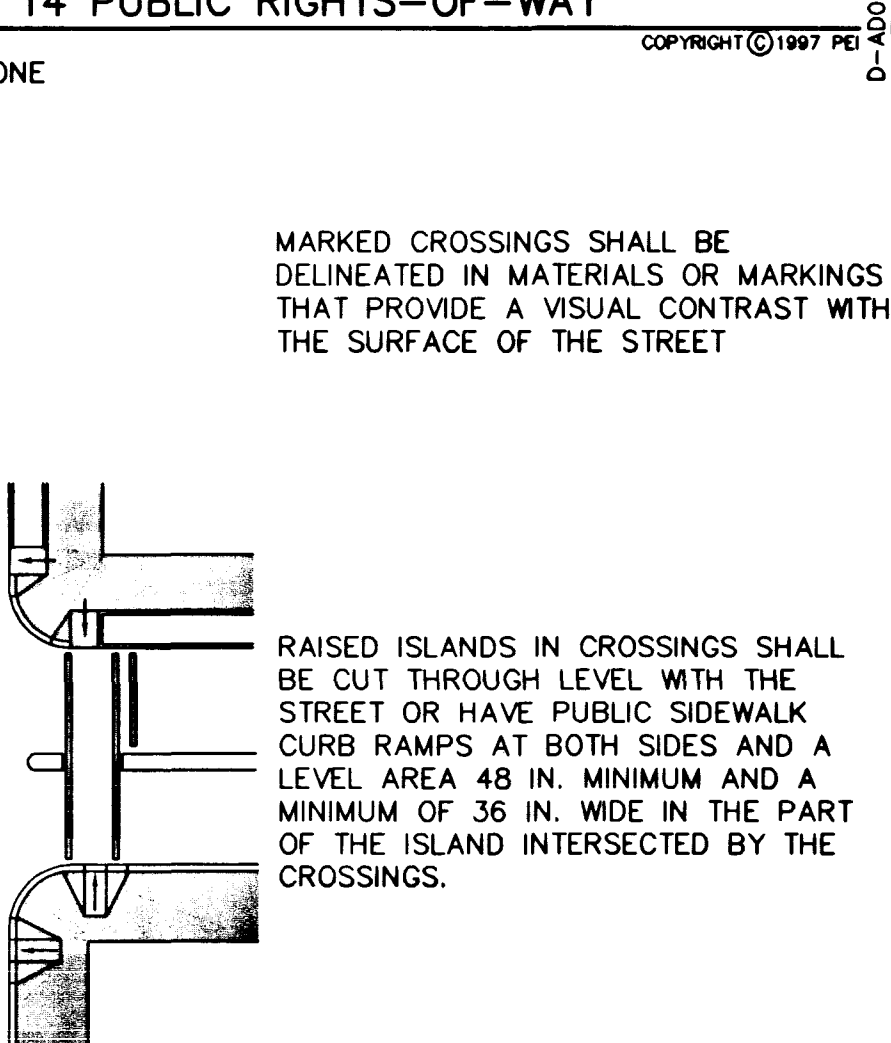

SEC. 14.1*
GENERAL

SEC. 14.2*
NEW CONSTRUCTION
REQUIREMENTS

SEC. 14.2.1*
PUBLIC SIDEWALKS

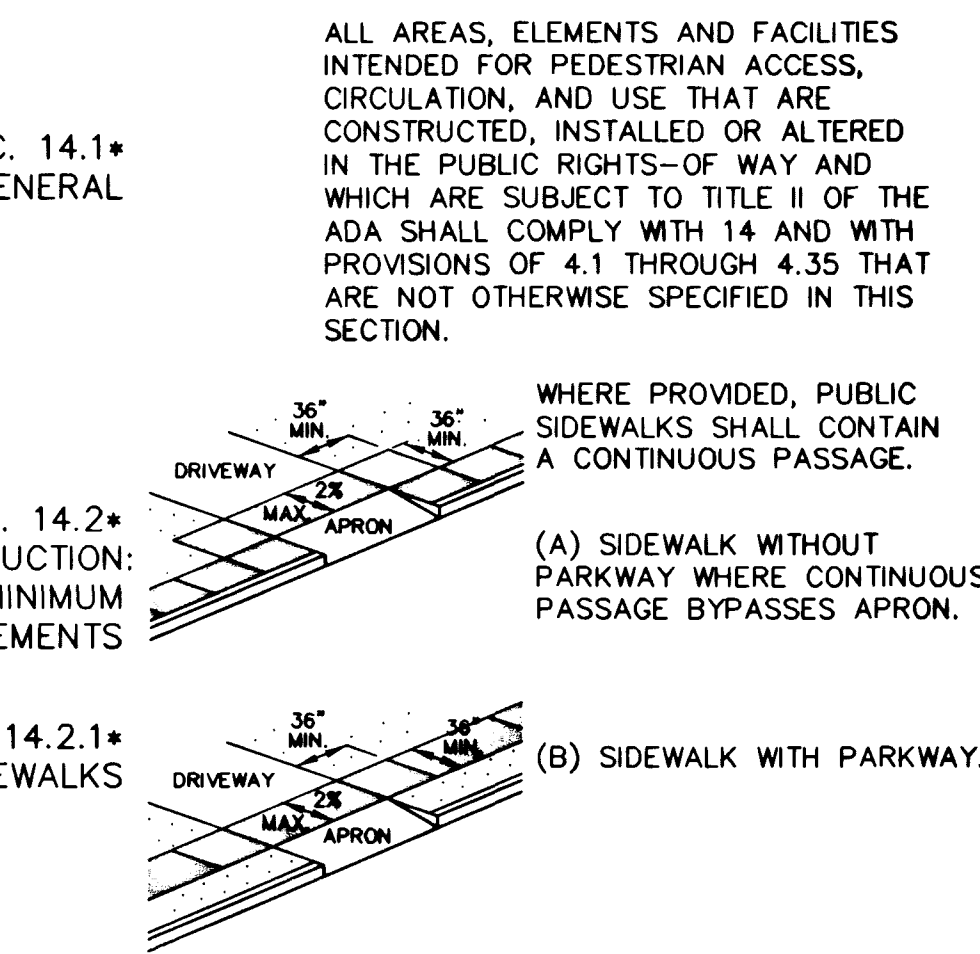


12 SECTION 4.8 RAMPS

SCALE: NONE

20 SECTION 14 PUBLIC RIGHTS-OF-WAY

SCALE: NONE

SEC. 14.2.5(3)*
ISLANDS

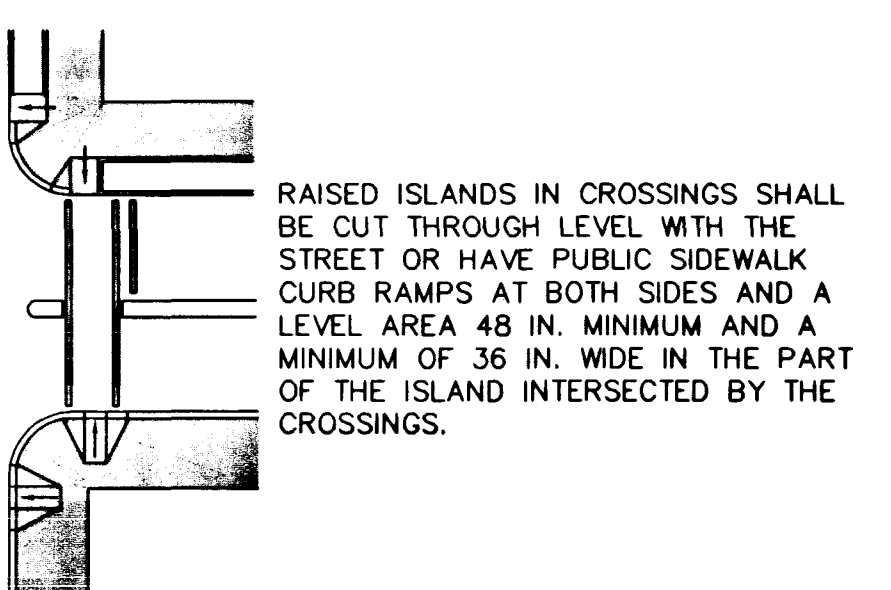

16

SECTION 14 PUBLIC RIGHTS-OF-WAY

SCALE: NONE

SEC. 4.6.4*
SIGNAGE

(INSTANCE "B")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "C")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "D")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "E")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "F")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "G")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "H")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "I")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "J")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "K")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "L")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "M")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "N")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "O")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "P")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "Q")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "R")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "S")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "T")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "U")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "V")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "W")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "X")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "Y")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "Z")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AA")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AB")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AC")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AD")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AE")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AF")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AG")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AH")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AI")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AJ")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AK")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AL")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AM")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AN")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AO")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AP")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AQ")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AR")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AS")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AT")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AU")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AV")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AW")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AX")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AY")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "AZ")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BA")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BB")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BC")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BD")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BE")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BF")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BG")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BH")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BI")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BJ")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BK")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BL")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BM")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BN")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BO")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BP")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BQ")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BR")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BS")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BT")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BU")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BV")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BW")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BX")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BY")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "BZ")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CA")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CB")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CC")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CD")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CE")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CF")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CG")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CH")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CI")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CJ")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CK")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CL")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CM")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CN")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CO")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CP")

SEC. 4.6.4*
SIGNAGE

(INSTANCE "CQ")

SEC. 4.6.4*
SIGNAGE

