

NOTE:
CONTRACTOR SHALL COORDINATE WITH THE CONSTRUCTION PROJECT REPRESENTATIVE TO DETERMINE WHICH 2'x2'x2' CONCRETE PILASTERS SHALL REQUIRE REMOVAL. NOTE: PILASTERS TO BE REMOVED SHALL BE GIVEN TO THE CITY.

- CONSTRUCTION NOTES**
- 1 PAINT CURB RED IN DRIVEWAY AREAS (TYP.).
 - 2 PAINT 4" WIDE WHITE PARKING STRIPE AS SHOWN (TYP.).
 - 3 3M HANDICAP SYMBOL AS SHOWN (TYP.). - SEE DETAIL 5 SHEET SD-1
 - 4 PAINT HANDICAP ACCESS STALL AS SHOWN (TYP.). SEE DETAIL 6 SHEET SD-1
 - 5 INSTALL HANDICAP SIGN (TYP.). SEE DETAIL 1 SHEET SD-3.
 - 6 INSTALL 6" CONCRETE WHEEL BLOCKS WHERE SHOWN. BLOCKS TO BE CENTERED 30" FROM FACE OF CURB.
 - 7 PAINT 4" WIDE YELLOW PARKING STRIPE AS SHOWN (TYP.).
 - 8 RESTRICTED PARKING SIGN - SEE DETAIL 2, SHEET SD-3.
 - 9 PAINT CURB YELLOW ALONG LENGTH OF 4" STRIPE.
 - 10 FIRELANE SIGN - SEE DETAIL 3, SHEET SD-3.

- CONTRACTOR SHALL RELOCATE APPROXIMATELY 90 LF OF CONCRETE/CHAIN BARRIER ALONG NEW SIDEWALK. CONTRACTOR SHALL PERFORM THE FOLLOWING:
1. DISCONNECT CHAIN LINKING FROM EACH CONCRETE 2'x2'x2' PLASTER.
 2. CAREFULLY MOVE AND PLACE PLASTER ALONG NEW WALKWAY EDGE. SECURE ON A FIRM, COMPACTED SOIL SURFACE. TRUE AND SQUARE WITH EACH OTHER.
 3. RE-CONNECT CHAIN. REPAIR ANY LINKS ACCORDINGLY IN KIND.
 4. INSURE CHAIN SECTIONS ARE TIGHT (NO SLACK).
- NOTE: CONTRACTOR SHALL COORDINATE WITH THE CONSTRUCTION PROJECT REPRESENTATIVE TO DETERMINE WHICH CONCRETE PILASTERS SHALL REQUIRE RELOCATION.


LINE TABLE

No.	BEARING	DISTANCE
L1	S14°49'03"E	13.8
L2	N75°10'57"E	6.67
L3	S75°10'57"W	12.47
L4	N14°49'03"W	6.9
L5	S75°10'57"W	8
L6	S14°49'03"E	9
L7	N14°49'03"W	13
L8	S14°49'03"E	6.9
L9	N75°10'57"E	20.01
L10	S14°49'03"E	6.88
L11	N75°10'57"E	13.34
L12	S75°10'57"W	6.67
L13	N14°49'03"W	6.88
L14	N00°11'13"E	5.01
L15	N00°11'13"E	3.88
L16	N75°10'57"E	5.75
L17	S14°49'03"E	9
L18	N75°10'57"E	13
L19	S75°10'57"W	13
L20	N75°10'57"E	14.5
L21	S14°49'03"E	18.5
L22	S75°10'57"W	14.5
L23	N14°49'03"W	2.38
L24	S14°49'03"E	2.88
L25	N14°49'03"W	8
L26	N75°10'57"E	10.75
L27	N14°49'03"W	2.88
L28	N14°49'03"W	9
L29	S14°49'03"E	9
L30	S75°10'57"W	15
L31	N75°10'57"E	15
L32	N75°10'57"E	17.9
L33	S14°49'03"E	2.38
L34	N00°11'13"E	2
L35	N00°11'13"E	9
L36	N75°10'57"E	13.59


NOTE: ANY BEARING LISTED AS "NORTH", "SOUTH", "EAST", OR "WEST" INDICATES 00°00'00" IN THE DIRECTION INDICATED.

CURVE TABLE

No.	RADIUS	DELTA	LENGTH	TANGENT
C1	1.5'	90°00'00"	2.36'	1.5'
C2	4.5'	90°00'00"	7.07'	4.5'
C3	8.48'	139°31'59"	15.81'	17.67'
C4	14.48'	148°12'42"	36.96'	47.69'
C5	8'	161°39'42"	22.57'	49.56'
C6	2'	90°00'00"	3.14'	2'
C7	50.5'	46°20'17"	40.84'	21.61'
C8	17'	42°27'57"	12.6'	6.61'
C9	1.5'	95°35'55"	2.5'	1.69'
C10	53.5'	90°00'00"	84.04'	53.5'
C11	45.5'	90°00'00"	71.47'	45.5'
C12	21.5'	118°44'18"	44.56'	36.31'
C13	21.5'	74°59'44"	28.14'	16.9'
C14	22'	55°44'37"	21.4'	11.63'
C15	10'	90°00'00"	15.71'	10'
C16	20'	90°00'00"	31.42'	20'
C17	18.5'	74°59'44"	21.6'	12.68'
C18	45.5'	46°20'17"	36.8'	19.4'

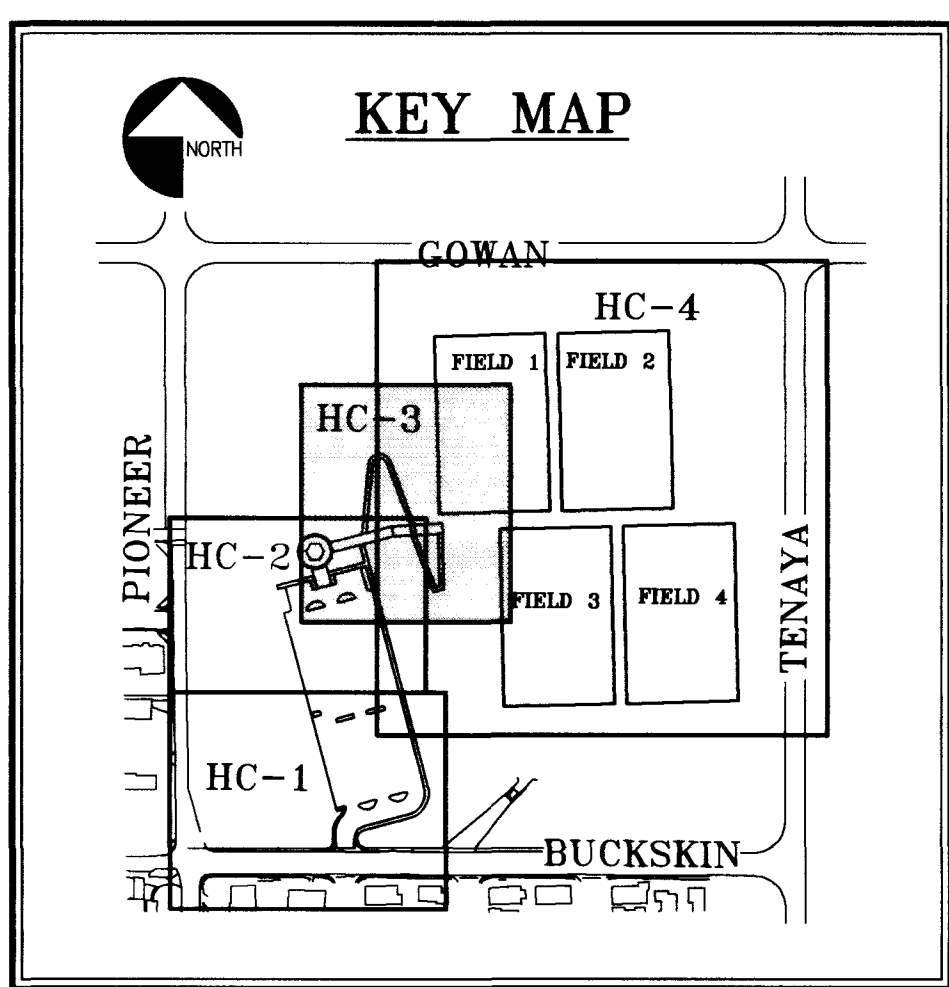

NOTE: ALL DIMENSIONS ARE FROM BACK OF CURB OR FACE OF BUILDING UNLESS NOTED OTHERWISE.

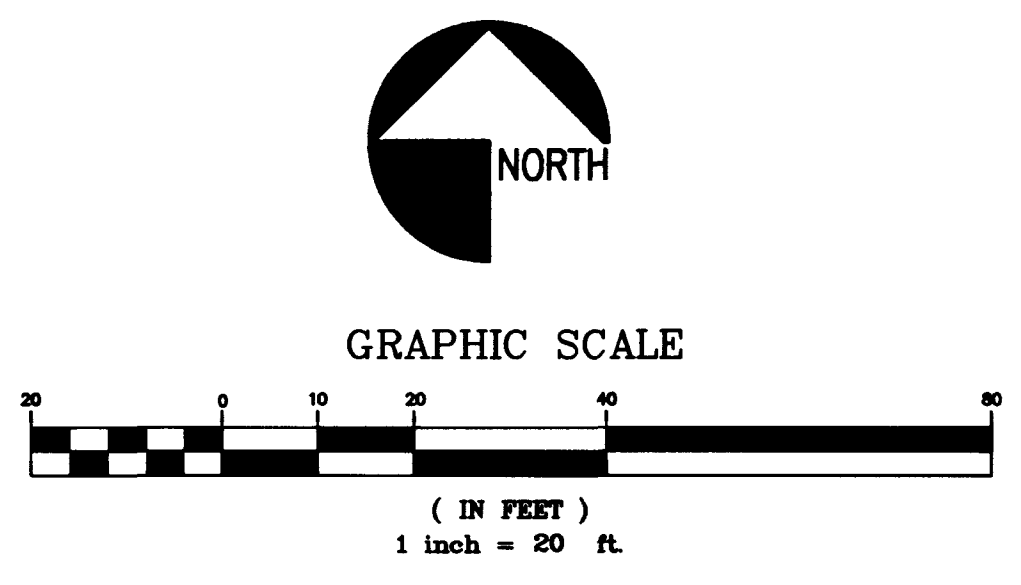

DATE: _____

REVISIONS: _____

DESIGN BY: CKB DRAWN BY: JAH

DATE: 07/01/97 JOB No. 860096.00

SCALE (H): 1"=20' SCALE (V): NA

PROJECT: DEPARTMENT OF PARKS & LEISURE ACTIVITIES

SHEET: HORIZONTAL PLAN

PROJECT: GOWAN SOCCER FIELD COMPLEX

REGISTERED PROFESSIONAL ENGINEER - STATE OF CALIFORNIA

STEPHEN R. HEYER

No. 4414

DRAWING NO. HC-3

675-V31

12

57

