


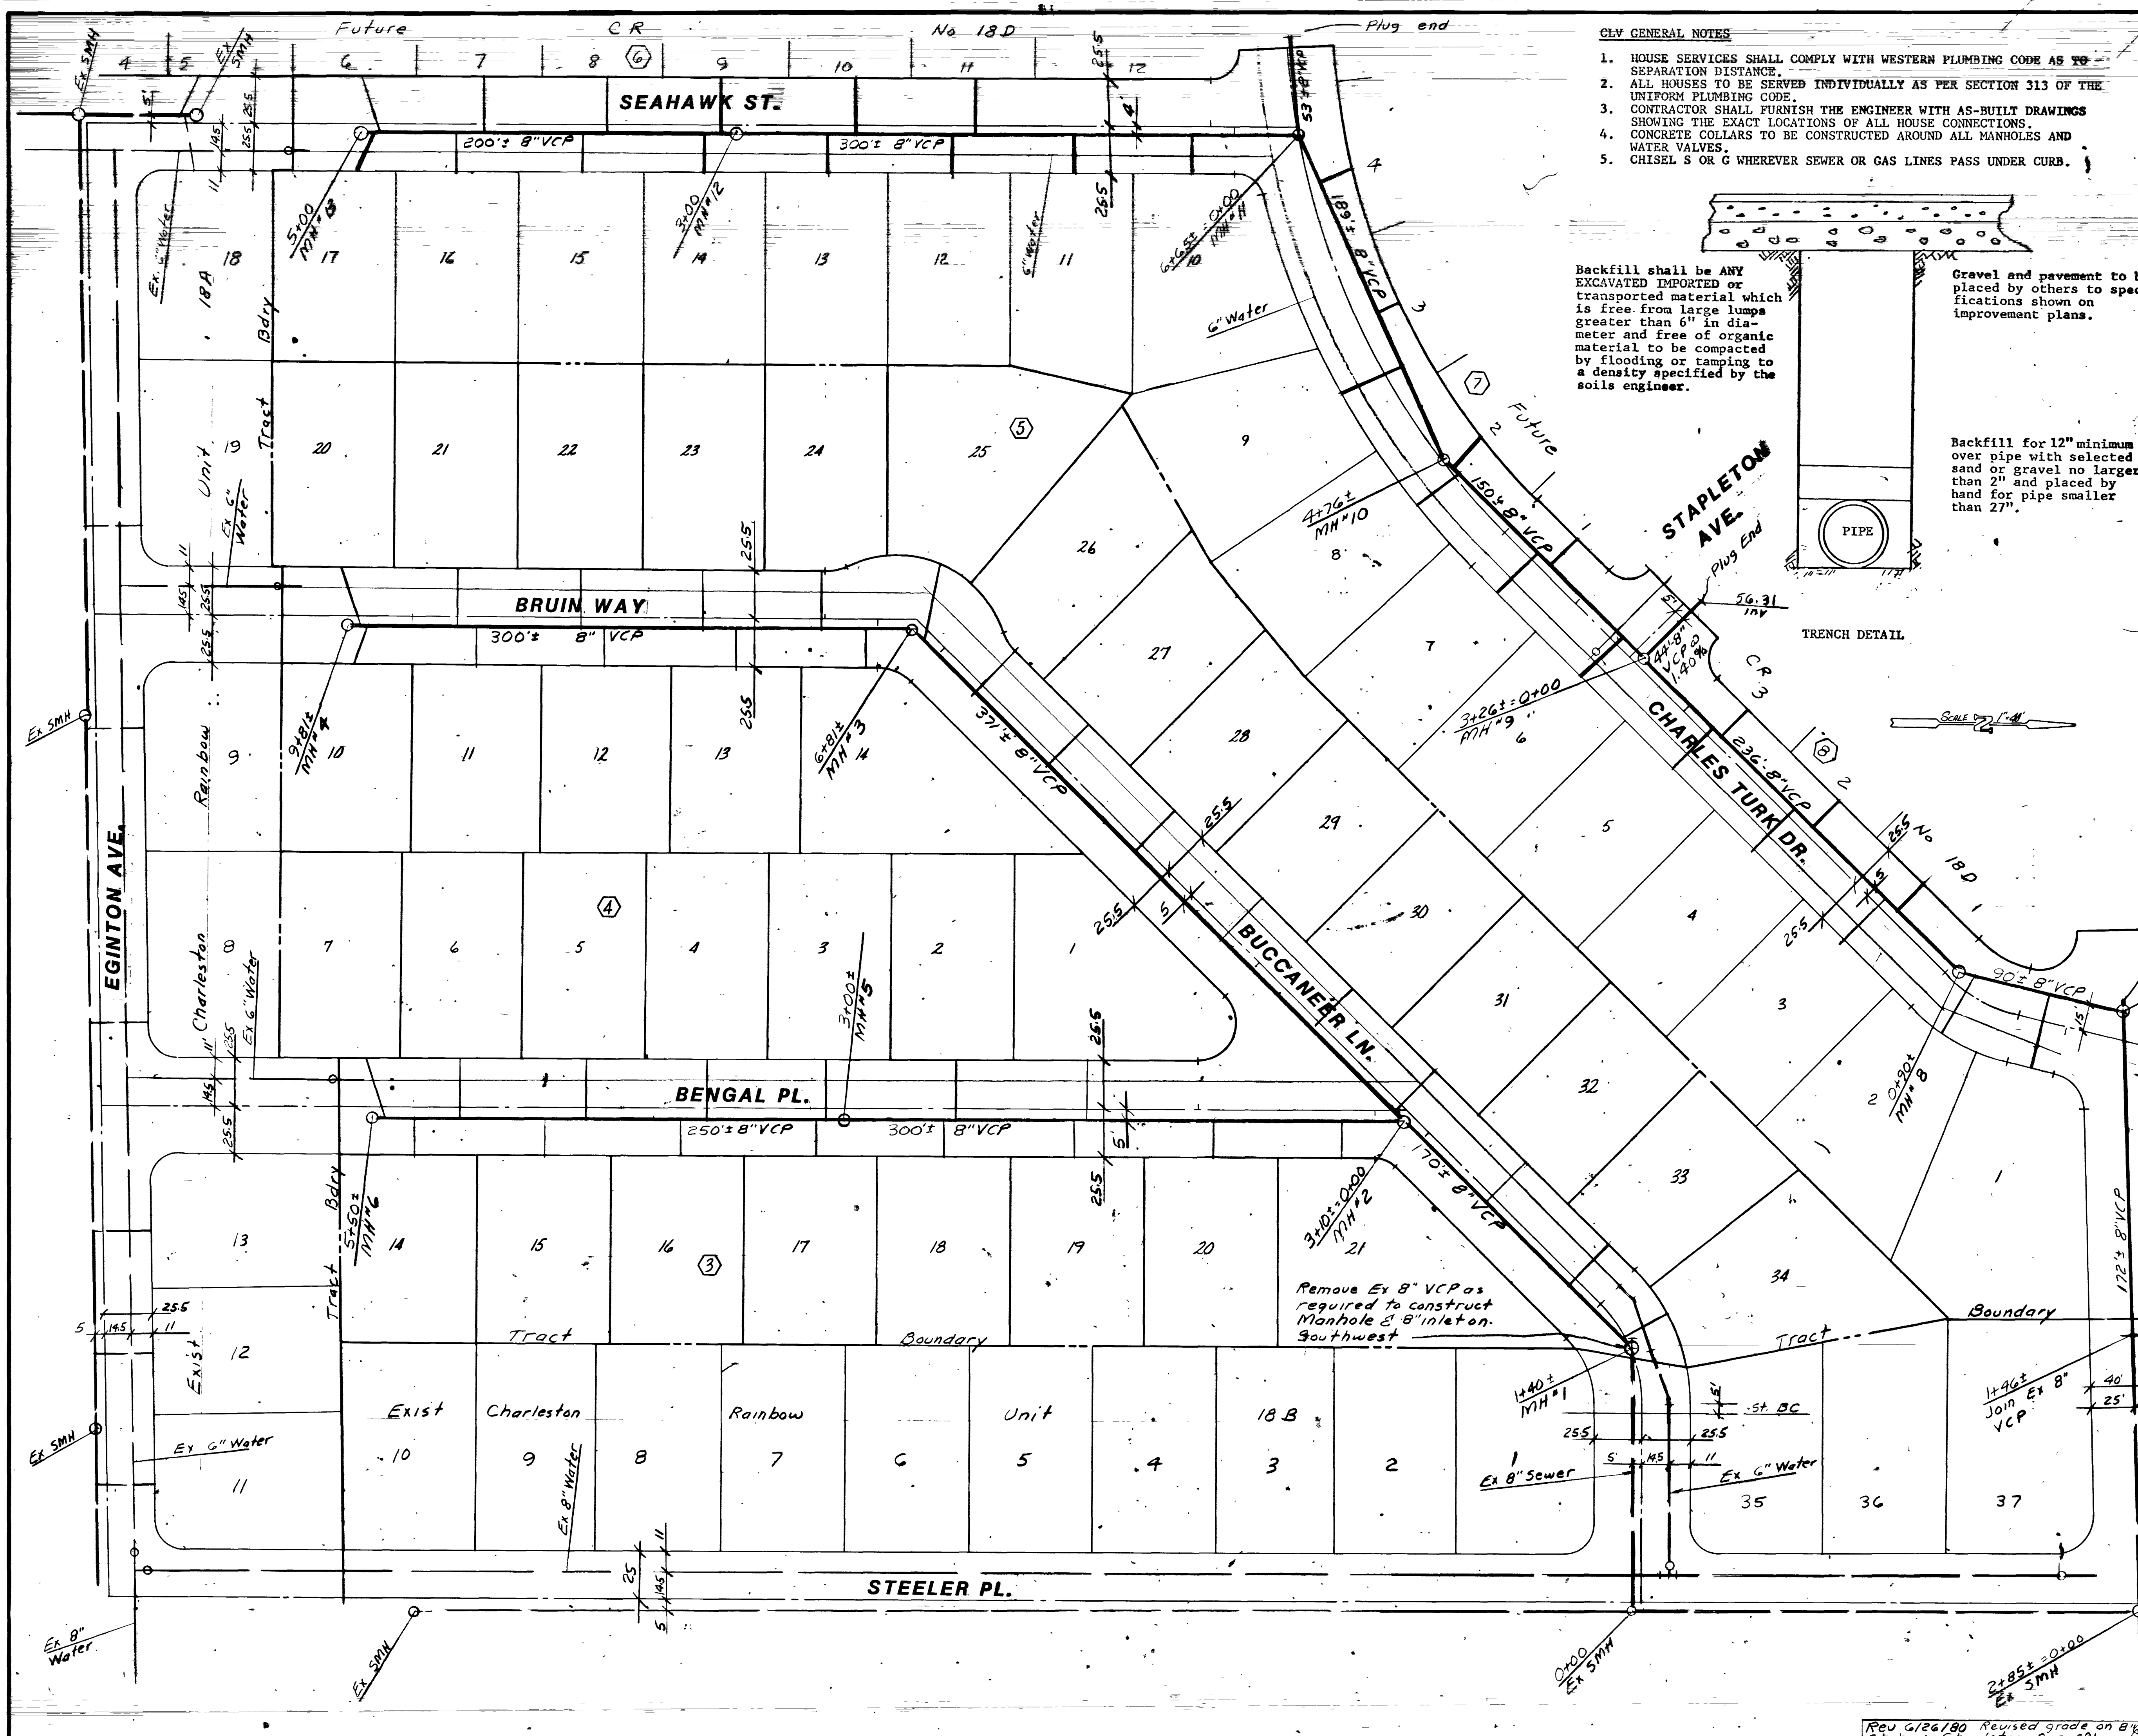

- CLV GENERAL NOTES
1. HOUSE SERVICES SHALL COMPLY WITH WESTERN PLUMBING CODE AS TO SEPARATION DISTANCE.
 2. ALL HOUSES TO BE SERVED INDIVIDUALLY AS PER SECTION 313 OF THE UNIFORM PLUMBING CODE.
 3. CONTRACTOR SHALL FURNISH THE ENGINEER WITH AS-BUILT DRAWINGS SHOWING THE EXACT LOCATIONS OF ALL HOUSE CONNECTIONS.
 4. CONCRETE COLLARS TO BE CONSTRUCTED AROUND ALL MANHOLES AND WATER VALVES.
 5. CHISEL S OR C WHEREVER SEWER OR GAS LINES PASS UNDER CURB.


Backfill shall be ANY EXCAVATED IMPORTED or transported material which is free from large lumps greater than 6" in diameter and free of organic material to be compacted by flooding or tamping to a density specified by the soils engineer.

Gravel and pavement to be placed by others to specifications shown on improvement plans.

Backfill for 12" minimum over pipe with selected sand or gravel no larger than 2" and placed by hand for pipe smaller than 27".



TRENCH DETAIL

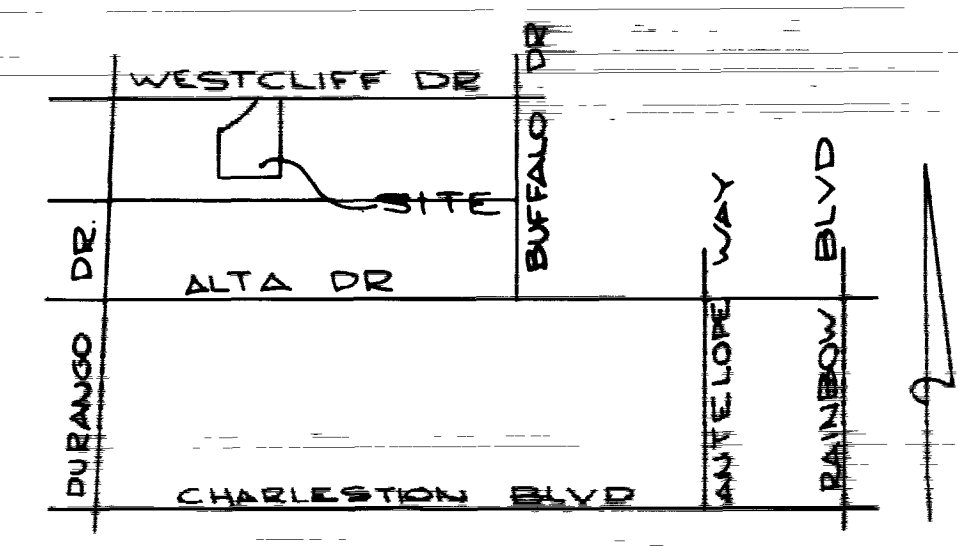

VICINITY MAP

QUANTITY ESTIMATE

Sewer Manhole	13 Ea
8" Main Line VCP Sewer	2281 LF±
8" x 4" Wyes	52 Ea
8" x 4" Wyes (Future lots)	13 Ea
4" VCP H.C. Lateral	1181 LF±
4" VCP H.C. Lateral (Future lots)	316 LF±

APPROVED

CLV CITY ENGINEER _____ DATE _____

CLV SANITATION ENGINEER _____ DATE _____

CLV FIELD OPERATIONS ENGINEER _____ DATE _____

CLV QUALITY CONTROL ENGINEER _____ DATE _____

SUBMITTED BY:

Charley R. Johnson 12/4/79

CHARLEY R. JOHNSON, P.E.

NEVADA CERTIFICATE 3005

vti CONSULTING ENGINEERS & PLANNERS

2209 PARADISE ROAD, SUITE 100, LAS VEGAS, NV 89119

CHARLESTON RAINBOW UNIT 18C

MASTER SEWER PLAN

SCALE: 1" = 40'

WO. NO. 1066-18C DATE 12/4/79 SHEET 6 OF 10

HORIZ. DES. REV. 10216

VERT. CHK. REV.

