


CITY OF LAS VEGAS GENERAL NOTES	CITY OF LAS VEGAS FIRE DEPARTMENT NOTES	LAS VEGAS VALLEY WATER DISTRICT NOTES	LEGEND	VICINITY MAP																																																																																																																																																																																																							
1. ALL CONSTRUCTION AND MATERIALS SHALL BE IN ACCORDANCE WITH THE "UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION OFF-SITE IMPROVEMENTS, CLARK COUNTY AREA, NEVADA", LATEST EDITION, AND OTHER APPLICABLE APPROVED STANDARDS ISSUED BY THE CONTROLLING AGENCY; THE "UNIFORM BUILDING CODE, AND ALL LOCAL CITY CODES AND ORDINANCES APPLICABLE, EXCEPT AS NOTED ON THIS SHEET AS "DEVIATIONS FROM STANDARDS". 2. THE EXISTENCE AND LOCATION OF ANY OVERHEAD OR UNDERGROUND UTILITY LINES, PIPES, OR STRUCTURES SHOWN ON THESE PLANS ARE OBTAINED BY A RESEARCH OF THE AVAILABLE RECORDS. EXISTING UTILITIES AS SHOWN FROM CITY PLANS LIBRARY ARE APPROXIMATE AND FOR RECORD PURPOSES. EXISTING UTILITIES ARE LOCATED ON PLANS ONLY FOR THE CONVENIENCE OF THE CONTRACTOR. EXISTING UTILITY SERVICE LATERALS MAY NOT BE SHOWN ON THE PLANS. THE CONTRACTOR SHALL, AT HIS OWN EXPENSE, LOCATE ALL UNDERGROUND AND OVERHEAD INTERFERENCE'S WHICH MAY AFFECT HIS OPERATION DURING CONSTRUCTION AND SHALL TAKE ALL NECESSARY PRECAUTIONS TO AVOID DAMAGE TO SAME. THE CONTRACTOR SHALL USE EXTREME CAUTION WHEN WORKING NEAR OVERHEAD UTILITIES SO AS TO SAFELY PROTECT ALL PERSONNEL AND EQUIPMENT, AND SHALL BE RESPONSIBLE FOR ALL COST AND LIABILITY IN CONNECTION THEREWITH. 3. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONARY MEASURES NECESSARY TO PROTECT EXISTING UTILITY LINES, STRUCTURES AND STREET IMPROVEMENTS WHICH ARE TO REMAIN IN PLACE, FROM DAMAGE, AND ALL SUCH IMPROVEMENTS OR STRUCTURES DAMAGED BY THE CONTRACTOR'S OPERATIONS SHALL BE REPAIRED OR REPLACED SATISFACTORY TO THE CITY ENGINEER AND OWNING UTILITY COMPANY AT THE EXPENSE OF THE CONTRACTOR. 4. ALL CONSTRUCTION SHALL BE AS SHOWN ON THESE PLANS. ANY REVISIONS SHALL HAVE THE PRIOR WRITTEN APPROVAL OF THE CITY ENGINEER. 5. TYPE V CEMENT SHALL BE USED IN ALL OFF-SITE CONCRETE WORK. CONCRETE TO BE 3000 P.S.I. MINIMUM 90 DAYS. MIX DESIGN TO BE APPROVED BY THE CITY ENGINEER, PRIOR TO THE USE ON THE PROJECT. 6. PERMITS ARE REQUIRED FOR ANY WORK IN THE PUBLIC RIGHT-OF-WAY. THE CONTRACTOR SHALL SECURE ALL PERMITS AND INSPECTIONS REQUIRED FOR THIS CONSTRUCTION. 7. EXPANSION JOINTS REQUIRED, MAXIMUM EVERY 300' IN EXTRUDED-TYPE CURB. 8. AC PAVEMENT TO BE ONE-HALF INCH(1/2") ABOVE THE LIP OF ALL GUTTERS AFTER COMPACTION, EXCEPT AT SIDEWALK RAMPS AND CROSS GUTTERS. 9. CURB AND GUTTER FOUND TO BE UNACCEPTABLE TO THE CITY OF LAS VEGAS SHALL BE REMOVED AND REPLACED PER STANDARD DRAWING 216. 10. SIDEWALK RAMPS SHALL BE CONSTRUCTED IN EACH QUADRANT OF AN INTERSECTION PER STANDARD DRAWING 235. EXACT LOCATION OF RAMPS MAY BE ADJUSTED IN THE FIELD BY A CITY INSPECTOR. 11. CONTRACTOR SHALL PROVIDE ALL NECESSARY HORIZONTAL AND VERTICAL TRANSITIONS BETWEEN NEW CONSTRUCTION AND EXISTING SURFACES TO PROVIDE FOR PROPER DRAINAGE AND FOR INGRESS AND EGRESS TO NEW CONSTRUCTION. THE EXTENT OF TRANSITIONS TO BE AS SHOWN ON PLANS. 12. ALL GRADING WORK SHALL CONFORM TO THE SOILS REPORT AS PREPARED BY THE SOILS ENGINEER APPROVED BY THE CITY ENGINEER, AND AS SHOWN ON THESE PLANS. 13. EXACT LOCATION OF ALL SAW CUT LINES MAY BE ADJUSTED OR DETERMINED IN THE FIELD BY A CITY ENGINEER IF LOCATION ON PLANS IS NOT CLEARLY SHOWN, OR EXISTING PAVEMENT CONDITION REQUIRES RELOCATIONS. 14. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONS NECESSARY TO PROTECT EXISTING PERMANENT SURVEY MONUMENTS. ANY MONUMENTS DISTURBED SHALL BE REPLACED AND ADJUSTED PER AVAILABLE RECORDS IN ACCORDANCE WITH N.R.S. STATUTE NO. 625.550. 15. UTILITY COMPANY METER BOXES, MANHOLE LIDS, VALVE COVERS, ETC., SHALL BE LOCATED OUT OF DRIVEWAYS, DRIVEWAY APRONS, FLOW LINES, AND CROSS GUTTERS UNLESS WRITTEN APPROVAL IS GRANTED BY THE UTILITY COMPANY AND THE CITY ENGINEER. 16. ALL WALLS, NEW OR EXISTING, ARE ONLY SHOWN ON CIVIL PLANS FOR THE PURPOSE OF REVIEWING GRADING RELATIONSHIPS; FLOOD CONTROL AND SIGHT DISTANCE AT INTERSECTIONS. NEW WALLS REQUIRE BUILDING PERMIT & BUILDING INSPECTION. 17. ASPHALT MIX DESIGN MUST BE SUBMITTED AND APPROVED BY THE CITY ENGINEER PRIOR TO THE PLACEMENT OF ASPHALT WITHIN CITY RIGHT-OF-WAY. 18. CONTRACTOR SHALL ADJUST ALL NEW AND EXISTING INLETS, VALVE BOXES, MANHOLE RIMS, AND SEWER CLEAN OUTS, ETC. TO FINISH GRADE AS APPLICABLE WHETHER OR NOT THEY ARE SHOWN ON THE PLANS. 19. MATERIALS, HANDLING AND PLACEMENT OF PORTLAND CEMENT CONCRETE SHALL BE IN ACCORDANCE WITH APPLICABLE SECTION OF NDOT OR THE CLARK COUNTY AREA SPECIFICATIONS (AS APPLICABLE) AND THE PLANS AND DETAILS SHOWN HEREON.	1. ALL WORK SHALL BE DONE IN STRICT ACCORDANCE WITH THE CITY OF LAS VEGAS FIRE DEPARTMENT "HYDRANT SPECIFICATIONS"; "HYDRANT INSTALLATION SPECIFICATIONS"; AND ORDINANCE NO. 3994. 2. AUTHORIZED HYDRANTS FOR THIS PROJECT ARE: A. KENNEDY GUARDIAN B. MUELLER A-423 CENTURION C. CLOW MODEL 2546 MEDALLION 3. ON ANY NEW HOME OR BUILDING INSTALLATION, ACCESSIBLE FIRE HYDRANTS SHALL BE INSTALLED BEFORE COMBUSTIBLE CONSTRUCTION COMMENCES AND SAID FIRE HYDRANTS SHALL BE IN GOOD WORKING ORDER WITH AN ADEQUATE WATER SUPPLY. 4. CONTRACTOR SHALL PLACE A BLUE REFLECTIVE MARKER AT CENTERLINE OF STREET ADJACENT TO FIRE HYDRANT AS REQUIRED IN ORDINANCE NO. 3944 TO IDENTIFY FIRE HYDRANT LOCATIONS. 5. CONTRACTOR SHALL CALL THE LAS VEGAS BUILDING DEPARTMENT AT 229-2071 FOR UNDERGROUND INSPECTION, PRESSURE AND FLUSH VERIFICATION OF ALL FIRE HYDRANTS AND FIRE LINES BEFORE BACK FILLING. 6. PAINTING OF THE CURBS AND HYDRANT AND ANY WORK NECESSARY FOR PROTECTION OF HYDRANTS FROM PHYSICAL DAMAGE, PER ORDINANCE NO. 3944, SHALL BE COMPLETED BEFORE APPROVAL BY THE CITY OF LAS VEGAS FIRE DEPARTMENT. 7. A PERMIT IS REQUIRED FROM THE FIRE DEPARTMENT FOR ON-SITE WATER LINES AND FIRE HYDRANTS. THE PERMIT AND CONTRACTOR'S MATERIAL AND TEST CERTIFICATE FOR UNDERGROUND PIPING FORM SHALL BE OBTAINED FROM THE FIRE PROTECTION ENGINEER PRIOR TO ANY WORK BEGINNING. 8. PRIVATE FIRE HYDRANTS SHALL BE PAINTED RED. 9. A FLOW TEST MUST BE WITNESSED BY THE FIRE DEPARTMENT PRIOR TO OCCUPANCY FOR VERIFICATION OF REQUIRED ON-SITE WATER SUPPLY. 10. ALL ON-SITE FIRE MAIN MATERIALS MUST BE U.L. LISTED AND A.W.M.A. APPROVED. 11. FIRE HYDRANT SPACING: RESIDENTIAL - 500 FEET UNSPRINKLERED; 1000 FEET SPRINKLERED. COMMERCIAL, INCLUDING MULTI-FAMILY - 300 FEET UNSPRINKLERED; 600 FEET SPRINKLERED. 12. WHERE NEW WATER MAINS ARE EXTENDED ALONG STREETS, WHERE HYDRANTS SHALL BE SPACED AT MAXIMUM ONE-THOUSAND (1,000') FOOT SPACING TO PROVIDE FOR TRANSPORTATION HAZARDS. 13. NO FIRE HYDRANT SHALL BE LOCATED WITHIN THE REQUIRED RADIUS OF A CUL-DE-SAC OR WITHIN TWENTY (20') FEET OF THE PERIMETER OF THE RADIUS OF THE CUL-DE-SAC. 14. NO FIRE HYDRANT SHALL BE LOCATED WITHIN SIX FEET (6') OF ANY CURB RETURN, DRIVEWAY, POWER POLE, STREET LIGHT OR ANY OTHER OBSTRUCTION. 15. TWO SOURCES OF SUPPLY ARE REQUIRED WHENEVER THERE ARE FOUR (4) OR MORE FIRE HYDRANTS INSTALLED ON A SINGLE SYSTEM. 16. NOT MORE THAN TWO (2) HYDRANTS CAN BE OUT OF SERVICE DUE TO A SINGLE MAIN BREAK. 17. FIRE APPARATUS ACCESS ROADS SHALL HAVE AN UNOBSTRUCTED WIDTH OF NOT LESS THAN TWENTY FEET (20') PROVIDED NO PARKING IS ALLOWED, NOT LESS THAN TWENTY-EIGHT (28') IF PARALLEL PARKING IS ALLOWED ON ONE SIDE, AND NOT LESS THAN THIRTY-SIX FEET (36') IF PARALLEL PARKING IS ALLOWED ON BOTH SIDES. VERTICAL CLEARANCE SHALL NOT BE LESS THAN THIRTEEN-FEET-SIX INCHES (13' 6"). 18. THE TURNING RADIUS FOR ANY FIRE APPARATUS ACCESS ROAD AND/OR FIRE LANE, PUBLIC OR PRIVATE, SHALL BE NOT LESS THAN FORTY-FIVE FEET (45') OUTSIDE RADIUS AND TWENTY-TWO FEET (22') INSIDE RADIUS. 19. A FIRE APPARATUS ROAD SHALL BE REQUIRED WHEN ANY PORTION OF AN EXTERIOR WALL OF THE FIRST STORY IS LOCATED MORE THAN ONE-HUNDRED FIFTY FEET (150') FROM A FIRE DEPARTMENT VEHICLE ACCESS (SEE EXCEPTIONS IN UFC 94, SECTION 902.2). 20. ALL DEAD END FIRE APPARATUS ACCESS ROADS AND/OR FIRE LANES, PUBLIC OR PRIVATE, IN EXCESS OF ONE-HUNDRED FIFTY FEET (150') IN LENGTH SHALL BE PROVIDED WITH AN APPROVED TURN AROUND AREA. SEE ORDINANCE NO. 3944. 21. ACCESS ROADS SHALL BE MARKED BY PLACING APPROVED SIGNS AT THE START OF THE DESIGNATED FIRE LANE, ONE SIGN AT THE END OF THE FIRE LANE AND WITH SIGNS AT INTERVALS OF ONE-HUNDRED FEET (100') ALONG ALL DESIGNATED FIRE LANES. SIGNS TO BE PLACED ON BOTH SIDES OF AN ACCESS ROADWAY IF NEEDED TO PREVENT PARKING ON EITHER SIDE. SIGNS TO BE INSTALLED NO HIGHER THAN TEN FEET (10') OR LESS THAN SIX FEET (6') FROM ROAD WAY LEVEL. THE CURBS ALONG OR ON THE PAVEMENT OR CEMENT IF CURB IS NOT PRESENT, SHALL BE PAINTED WITH A RED WEATHER RESISTANT PAINT IN ADDITION TO THE SIGNS. 22. ELECTRICALLY CONTROLLED ACCESS GATES SHALL BE PROVIDED WITH AN APPROVED EMERGENCY VEHICLE DETECTOR/RECEIVER SYSTEM. SAID SYSTEM SHALL BE INSTALLED IN ACCORDANCE WITH THE CITY OF LAS VEGAS GUIDELINES FOR AUTOMATIC EMERGENCY VEHICLE ACCESS GATES.	1. NO WORK SHALL BEGIN UNTIL THE WATER PLANS HAVE BEEN RELEASED FOR CONSTRUCTION BY THE LVVWD. FOLLOWING WATER PLAN APPROVAL, FORTY-EIGHT (48) HOUR NOTICE SHALL BE GIVEN TO THE LVVWD COMMUNICATIONS SUPPORT CENTER (258-7171) PRIOR TO THE START OF CONSTRUCTION. NOTICE MUST BE GIVEN BY 2:00 P.M. THE BUSINESS DAY PRIOR TO A LVVWD INSPECTION. 2. ALL WORK SHALL CONFORM TO LVVWD STANDARD PLATES, DRAWING, AND OTHER SPECIFICATIONS AND THE UNIFORM DESIGN AND CONSTRUCTION STANDARDS FOR WATER DISTRIBUTION SYSTEMS (UDACS), LATEST EDITION. 3. ALL WORK, EXCEPT AS MODIFIED BY THESE PLANS OR BY NOTE 2, SHALL BE DONE IN ACCORDANCE WITH THE MOST CURRENT DRAFT OR EDITION OF THE UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION OFF-SITE IMPROVEMENTS, CLARK COUNTY AREA. 4. A SINGLE PIPE MATERIAL SHALL BE USED THROUGHOUT THE PROJECT, UNLESS OTHERWISE APPROVED BY THE LVVWD. 5. ALL SERVICE LATERALS TWO INCHES (2") IN DIAMETER AND SMALLER SHALL BE COPPER TUBING WITH LVVWD APPROVED SERVICE SADDLES. 6. ALL WATER METER BOXES SHALL BE LOCATED OUTSIDE OF DRIVEWAY AREAS. 7. ALL VALVES SHALL BE RELOCATED OUTSIDE OF DRIVEWAYS, GUTTERS, CURBS AND ALLEY GUTTERS. 8. THE FOLLOWING REQUIREMENTS MUST BE MET IN THE EVENT A WATER LINE AND A SANITARY SEWER OR STORM SEWER LINE CROSS: MINIMUM EIGHTEEN INCH (18") VERTICAL SEPARATION (OUTSIDE TO OUTSIDE) MUST BE MAINTAINED WHEN THE WATER LINE IS INSTALLED OVER THE SANITARY OR STORM SEWER LINE. IF THE VERTICAL SEPARATION CANNOT BE MAINTAINED OR THE WATER LINE MUST BE PLACED UNDER THE SANITARY OR STORM SEWER LINE, THE SANITARY OR STORM SEWER LINE MUST BE CONSTRUCTED WITH ONE OF THE FOLLOWING OR, AS SHOWN ON THESE PLANS: A. POTABLE WATER SUPPLY QUALITY MATERIAL. B. ENCASEMENT, WITH FOUR INCH (4") CONCRETE (MINIMUM). C. SLEEVING WITH POTABLE WATER SUPPLY QUALITY PIPE. EACH PROVISION MUST EXTEND ALONG THE SANITARY OR STORM SEWER, ON EITHER SIDE OF THE WATER MAIN, A MINIMUM TEN FOOT (10') DISTANCE PERPENDICULAR TO THE EXTERIOR OF MAIN. 9. WARNING TAPE SHALL BE REQUIRED OVER ALL MAINS, ALL SIX INCH (6") DIAMETER AND LARGER SERVICE LATERALS, AND ANY SERVICE LATERAL NOT INSTALLED PERPENDICULAR TO THE MAIN IN ACCORDANCE WITH STANDARD PLATE NO. 27. 10. ALL WATER FACILITIES SHALL BE FILLED, DISINFECTED, PRESSURE TESTED, FLUSHED, FILLED AND AN ACCEPTABLE WATER SAMPLE OBTAINED PRIOR TO CONNECTION THE THE LVVWD'S DISTRIBUTION SYSTEM. 11. THE CONTRACTOR MUST OBTAIN ALL METERS TWO INCHES (2") AND SMALLER FROM LVVWD CENTRAL STORES. TELEPHONE 258-3152 FORTY-EIGHT (48) HOURS PRIOR TO PICK-UP. 12. CONSTRUCTION MAY INTERRUPT SERVICE, WITH LVVWD APPROVAL AND PROPER NOTIFICATION, BETWEEN THE HOURS OF 10:00 P.M. AND 6:00 A.M. SUNDAY THROUGH THURSDAY. CIRCUMSTANCES THAT MAY REQUIRE TEMPORARY SERVICE FEED MUST HAVE PRIOR LVVWD APPROVAL. 13. ALL WATER FACILITY CONSTRUCTION MATERIALS USED MUST BE AS LISTED ON THE LVVWD'S PRE-APPROVED MATERIALS AND MANUFACTURERS LISTING FOR NEW FACILITIES, LATEST REVISION OR SPECIFICALLY APPROVED ON THESE PLANS. 14. APPROVAL OF THESE PLANS FOR THE WATER STUB OUT INSTALLATION WILL NOT BE CONSTRUED AS A COMMITMENT FOR WATER SERVICE TO THIS PROPERTY. 15. CONDITIONAL APPROVAL OF VALVED OUTLET (6" AND LARGER) IN THE EVENT THE WATER PLANS SHOW ONE OR MORE VALVED OUTLETS EXTENDING OUT OF PAVED AREAS, INSTALLATIONS OF THESE OUTLETS IS ACCEPTABLE, HOWEVER, IF THE OUTLETS ARE INCORRECTLY LOCATED OR NOT USED FOR ANY REASON WHEN THE PROPERTY IS DEVELOPED, THE DEVELOPER SHALL ABANDON THE OUTLETS AT THE CONNECTION TO THE ACTIVE MAIN IN ACCORDANCE WITH THE DISTRICT'S STANDARDS AND AT THE DEVELOPER'S EXPENSE. 16. WATER CROSSING NOTE THE FOLLOWING ARE THE REQUIREMENTS THAT MUST BE MET WHEN THERE IS A WATER-SEWER CROSSING: WHEN PROTECTION OF THE WATER LINE IS CONSIDERED, THE MINIMUM VERTICAL DISTANCE OF EIGHTEEN INCHES (18") MUST BE MAINTAINED WHEN THE WATER LINE IS INSTALLED OVER THE SEWER/STORM LINE. IF THIS DISTANCE CANNOT BE MAINTAINED BECAUSE OF PHYSICAL OBSTRUCTIONS OR THE WATER LINE MUST BE PLACED UNDER THE SEWER/STORM LINE, THE SEWER/STORM LINE MUST BE CONSTRUCTED WITH ANY OF THE FOLLOWING: A. EXTRA HEAVY CAST IRON OR DUCTILE IRON PIPE. B. WATER SUPPLY QUALITY. C. ENCASEMENT WITH 4 INCHES MINIMUM OF CONCRETE OR SLEEVING WITH WATER QUALITY PIPE EACH OF THESE PROVISIONS MUST BE EXTENDED FOR TEN FEET (10') ON EITHER SIDES OF THE WATER LINE AT 90 DEGREES TO THE CROSSING.	<table border="1"><thead><tr><th>EXISTING</th><th>PROPOSED</th><th>RIGHT-OF-WAY</th><th>EXISTING</th><th>PROPOSED</th></tr></thead><tbody><tr><td>---</td><td>---</td><td>CENTERLINE</td><td>-----</td><td>SCREEN / RETAINING WALL</td></tr><tr><td>---</td><td>---</td><td>WATER LINE</td><td>-----</td><td>CHAIN LINK FENCE</td></tr><tr><td>---</td><td>---</td><td>SANITARY SEWER LINE</td><td>-----</td><td>TRASH ENCLOSURE</td></tr><tr><td>---</td><td>---</td><td>GAS LINE</td><td>-----</td><td>GRADE BREAK</td></tr><tr><td>---</td><td>---</td><td>STORM DRAIN</td><td>-----</td><td>WIRE FENCE</td></tr><tr><td>---</td><td>---</td><td>POWER LINE / POWER POLE</td><td>-----</td><td>FT=0.00 FINISH FLOOR</td></tr><tr><td>---</td><td>---</td><td>TELEPHONE LINE</td><td>-----</td><td>0.00 C.O. INV. CLEAREW INVERT ELEVATION</td></tr><tr><td>---</td><td>---</td><td>FIRE HYDRANT</td><td>-----</td><td>0.00 C.O. INV. FLOW LINE</td></tr><tr><td>---</td><td>---</td><td>WATER VALVE</td><td>-----</td><td>0.00 FINISH GRADE</td></tr><tr><td>---</td><td>---</td><td>METERS / PULL BOXES</td><td>-----</td><td>0.00 BACK OF SIDEWALK</td></tr><tr><td>---</td><td>---</td><td>REDUCED</td><td>-----</td><td>0.00 B.S.W. TOP OF CURB</td></tr><tr><td>---</td><td>---</td><td>MANHOLE</td><td>-----</td><td>0.00 T.O.W. TOP OF WALL</td></tr><tr><td>---</td><td>---</td><td>CLEANOUT</td><td>-----</td><td>0.00 T.O.W. A.C. PAVING</td></tr><tr><td>---</td><td>---</td><td>CONTOUR</td><td>-----</td><td>0.00 TYPE "L" CURB & GUTTER</td></tr><tr><td>---</td><td>---</td><td>STREET LIGHTS</td><td>---</td><td>0.00 CONCRETE</td></tr><tr><td>---</td><td>---</td><td>100 W.H.P.S.</td><td></td><td></td></tr><tr><td>---</td><td>---</td><td>150 W.H.P.S.</td><td></td><td></td></tr><tr><td>---</td><td>---</td><td>200 W.H.P.S.</td><td></td><td></td></tr><tr><td>---</td><td>---</td><td>250 W.H.P.S.</td><td></td><td></td></tr></tbody></table> <table border="1"><thead><tr><th>ABBREVIATIONS</th></tr></thead><tbody><tr><td>A.C. ASPHALTIC CONCRETE</td><td>ON CENTER</td></tr><tr><td>A.C.P. ASPHALT CEMENT PIPE</td><td>OUTSIDE DIAMETER</td></tr><tr><td>ADJ. ADJUST, ADJUSTABLE</td><td>P. POWER LINE</td></tr><tr><td>ARC. ARC LENGTH</td><td>P.C. POINT OF CURVATURE</td></tr><tr><td>B.C. BEGINNING OF CURB OR BACK OF CURB</td><td>P.C.C. PORTLAND CONCRETE CEMENT</td></tr><tr><td>B.C.R. BEGINNING OF CURB RETURN OR BACK OF CURB RADIUS</td><td>P.D. PAD GRADE</td></tr><tr><td>B.D. BOUNDARY</td><td>P.H.P. PLASTIC HIGH PRESSURE</td></tr><tr><td>B.E. BEGIN</td><td>P.I. POINT OF INTERSECTION</td></tr><tr><td>B.M. BENCHMARK</td><td>P.L. PROPERTY LINE</td></tr><tr><td>B.S.W. BACK OF SIDEWALK</td><td>P.P. POWER POLE</td></tr><tr><td>B.V.C. BEGINNING OF VERTICAL CURVE</td><td>P.R.C. POINT OF REVERSE CURVE</td></tr><tr><td>C.B. CURB AND GUTTER</td><td>PROP. PROPOSED</td></tr><tr><td>C.F. CURB FACE</td><td>P.T. POINT OF TANGENT</td></tr><tr><td>C.I.P. CAST IRON PIPE</td><td>P.V.C. POLYVINYL CHLORIDE PIPE</td></tr><tr><td>C.L. CENTERLINE</td><td>P.V.I. POINT OF VERTICAL INTERSECTION</td></tr><tr><td>C.M.P. CORRUGATED METAL PIPE</td><td>PMIT. PERMIT</td></tr><tr><td>CONC. CONCRETE</td><td>Q. RATE OF FLOW</td></tr><tr><td>CONSTR. CONSTRUCT, CONSTRUCTION</td><td>R. RADIUS</td></tr><tr><td>D.C. DEEPENED CURB</td><td>R.C.P. REINFORCED CONCRETE PIPE</td></tr><tr><td>D.I. DROP INLET</td><td>R.T. RIGHT</td></tr><tr><td>D.M. DIAMETER</td><td>R/W. RIGHT OF WAY</td></tr><tr><td>D.I.P. DUCTILE IRON PIPE</td><td>S. SOUTH</td></tr><tr><td>D.M.H. DROP MANHOLE</td><td>S.S. SANITARY SEWER</td></tr><tr><td>E.C. END OF CURVE</td><td>S.D. STORM DRAIN</td></tr><tr><td>E.C.R. END OF CURB RETURN</td><td>S.H.P. STEEL HIGH PRESSURE</td></tr><tr><td>E.L. ELEVATION</td><td>S.I. SHEET</td></tr><tr><td>E.P. EDGE OF PAVING</td><td>S.P. IN. SPECIAL MANHOLE</td></tr><tr><td>E.V.C. EDGE OF VERTICAL CURVE</td><td>STA. STATION</td></tr><tr><td>EXIST. EX. EXISTING</td><td>STAND. STANDARD</td></tr><tr><td>F.M. FIN. FINISHED FLOOR</td><td>STL. SIDEWALK</td></tr><tr><td>F.D.C. FIRE DEPARTMENT CONNECTION</td><td>T. TANGENT DISTANCE</td></tr><tr><td>F.H. FIRE HYDRANT</td><td>TEL. TELEPHONE</td></tr><tr><td>F.L. FLOWLINE</td><td>T.O.C. TOP OF CURB</td></tr><tr><td>G. GAS</td><td>T.A.H. TOP OF MANHOLE</td></tr><tr><td>G.B. GRADE BREAK</td><td>T.O.W. TOP OF WALL</td></tr><tr><td>H. HEIGHT</td><td>T.O.W. TRANSITION</td></tr><tr><td>H.O.R. HORIZONTAL</td><td>T.S.C. TRAFFIC SIGNAL CONDUIT</td></tr><tr><td>H.P. HIGH POINT</td><td>T.S.W. TOP OF SIDEWALK</td></tr><tr><td>I.S. INSIDE DIAMETER</td><td>V.C. VERTICAL CURVE</td></tr><tr><td>I.V. INVERT</td><td>V.C.P. VERTICAL CLAY PIPE</td></tr><tr><td>L. LARGESIDE</td><td>VERT. VERTICAL</td></tr><tr><td>L.A.T. LATERAL</td><td>V.V. VALLEY VUTTER</td></tr><tr><td>L.F. LINEAL FEET</td><td>W. WEST</td></tr><tr><td>L.T. LEFT</td><td></td></tr><tr><td>M. MAXIMUM</td><td></td></tr><tr><td>M.H. MANHOLE</td><td></td></tr><tr><td>M.N. MINIMUM</td><td></td></tr><tr><td>M.C. NOT IN CONTRACT</td><td></td></tr><tr><td>N.O. NUMBER</td><td></td></tr></tbody></table>	EXISTING	PROPOSED	RIGHT-OF-WAY	EXISTING	PROPOSED	---	---	CENTERLINE	-----	SCREEN / RETAINING WALL	---	---	WATER LINE	-----	CHAIN LINK FENCE	---	---	SANITARY SEWER LINE	-----	TRASH ENCLOSURE	---	---	GAS LINE	-----	GRADE BREAK	---	---	STORM DRAIN	-----	WIRE FENCE	---	---	POWER LINE / POWER POLE	-----	FT=0.00 FINISH FLOOR	---	---	TELEPHONE LINE	-----	0.00 C.O. INV. CLEAREW INVERT ELEVATION	---	---	FIRE HYDRANT	-----	0.00 C.O. INV. FLOW LINE	---	---	WATER VALVE	-----	0.00 FINISH GRADE	---	---	METERS / PULL BOXES	-----	0.00 BACK OF SIDEWALK	---	---	REDUCED	-----	0.00 B.S.W. TOP OF CURB	---	---	MANHOLE	-----	0.00 T.O.W. TOP OF WALL	---	---	CLEANOUT	-----	0.00 T.O.W. A.C. PAVING	---	---	CONTOUR	-----	0.00 TYPE "L" CURB & GUTTER	---	---	STREET LIGHTS	---	0.00 CONCRETE	---	---	100 W.H.P.S.			---	---	150 W.H.P.S.			---	---	200 W.H.P.S.			---	---	250 W.H.P.S.			ABBREVIATIONS	A.C. ASPHALTIC CONCRETE	ON CENTER	A.C.P. ASPHALT CEMENT PIPE	OUTSIDE DIAMETER	ADJ. ADJUST, ADJUSTABLE	P. POWER LINE	ARC. ARC LENGTH	P.C. POINT OF CURVATURE	B.C. BEGINNING OF CURB OR BACK OF CURB	P.C.C. PORTLAND CONCRETE CEMENT	B.C.R. BEGINNING OF CURB RETURN OR BACK OF CURB RADIUS	P.D. PAD GRADE	B.D. BOUNDARY	P.H.P. PLASTIC HIGH PRESSURE	B.E. BEGIN	P.I. POINT OF INTERSECTION	B.M. BENCHMARK	P.L. PROPERTY LINE	B.S.W. BACK OF SIDEWALK	P.P. POWER POLE	B.V.C. BEGINNING OF VERTICAL CURVE	P.R.C. POINT OF REVERSE CURVE	C.B. CURB AND GUTTER	PROP. PROPOSED	C.F. CURB FACE	P.T. POINT OF TANGENT	C.I.P. CAST IRON PIPE	P.V.C. POLYVINYL CHLORIDE PIPE	C.L. CENTERLINE	P.V.I. POINT OF VERTICAL INTERSECTION	C.M.P. CORRUGATED METAL PIPE	PMIT. PERMIT	CONC. CONCRETE	Q. RATE OF FLOW	CONSTR. CONSTRUCT, CONSTRUCTION	R. RADIUS	D.C. DEEPENED CURB	R.C.P. REINFORCED CONCRETE PIPE	D.I. DROP INLET	R.T. RIGHT	D.M. DIAMETER	R/W. RIGHT OF WAY	D.I.P. DUCTILE IRON PIPE	S. SOUTH	D.M.H. DROP MANHOLE	S.S. SANITARY SEWER	E.C. END OF CURVE	S.D. STORM DRAIN	E.C.R. END OF CURB RETURN	S.H.P. STEEL HIGH PRESSURE	E.L. ELEVATION	S.I. SHEET	E.P. EDGE OF PAVING	S.P. IN. SPECIAL MANHOLE	E.V.C. EDGE OF VERTICAL CURVE	STA. STATION	EXIST. EX. EXISTING	STAND. STANDARD	F.M. FIN. FINISHED FLOOR	STL. SIDEWALK	F.D.C. FIRE DEPARTMENT CONNECTION	T. TANGENT DISTANCE	F.H. FIRE HYDRANT	TEL. TELEPHONE	F.L. FLOWLINE	T.O.C. TOP OF CURB	G. GAS	T.A.H. TOP OF MANHOLE	G.B. GRADE BREAK	T.O.W. TOP OF WALL	H. HEIGHT	T.O.W. TRANSITION	H.O.R. HORIZONTAL	T.S.C. TRAFFIC SIGNAL CONDUIT	H.P. HIGH POINT	T.S.W. TOP OF SIDEWALK	I.S. INSIDE DIAMETER	V.C. VERTICAL CURVE	I.V. INVERT	V.C.P. VERTICAL CLAY PIPE	L. LARGESIDE	VERT. VERTICAL	L.A.T. LATERAL	V.V. VALLEY VUTTER	L.F. LINEAL FEET	W. WEST	L.T. LEFT		M. MAXIMUM		M.H. MANHOLE		M.N. MINIMUM		M.C. NOT IN CONTRACT		N.O. NUMBER		
EXISTING	PROPOSED	RIGHT-OF-WAY	EXISTING	PROPOSED																																																																																																																																																																																																							
---	---	CENTERLINE	-----	SCREEN / RETAINING WALL																																																																																																																																																																																																							
---	---	WATER LINE	-----	CHAIN LINK FENCE																																																																																																																																																																																																							
---	---	SANITARY SEWER LINE	-----	TRASH ENCLOSURE																																																																																																																																																																																																							
---	---	GAS LINE	-----	GRADE BREAK																																																																																																																																																																																																							
---	---	STORM DRAIN	-----	WIRE FENCE																																																																																																																																																																																																							
---	---	POWER LINE / POWER POLE	-----	FT=0.00 FINISH FLOOR																																																																																																																																																																																																							
---	---	TELEPHONE LINE	-----	0.00 C.O. INV. CLEAREW INVERT ELEVATION																																																																																																																																																																																																							
---	---	FIRE HYDRANT	-----	0.00 C.O. INV. FLOW LINE																																																																																																																																																																																																							
---	---	WATER VALVE	-----	0.00 FINISH GRADE																																																																																																																																																																																																							
---	---	METERS / PULL BOXES	-----	0.00 BACK OF SIDEWALK																																																																																																																																																																																																							
---	---	REDUCED	-----	0.00 B.S.W. TOP OF CURB																																																																																																																																																																																																							
---	---	MANHOLE	-----	0.00 T.O.W. TOP OF WALL																																																																																																																																																																																																							
---	---	CLEANOUT	-----	0.00 T.O.W. A.C. PAVING																																																																																																																																																																																																							
---	---	CONTOUR	-----	0.00 TYPE "L" CURB & GUTTER																																																																																																																																																																																																							
---	---	STREET LIGHTS	---	0.00 CONCRETE																																																																																																																																																																																																							
---	---	100 W.H.P.S.																																																																																																																																																																																																									
---	---	150 W.H.P.S.																																																																																																																																																																																																									
---	---	200 W.H.P.S.																																																																																																																																																																																																									
---	---	250 W.H.P.S.																																																																																																																																																																																																									
ABBREVIATIONS																																																																																																																																																																																																											
A.C. ASPHALTIC CONCRETE	ON CENTER																																																																																																																																																																																																										
A.C.P. ASPHALT CEMENT PIPE	OUTSIDE DIAMETER																																																																																																																																																																																																										
ADJ. ADJUST, ADJUSTABLE	P. POWER LINE																																																																																																																																																																																																										
ARC. ARC LENGTH	P.C. POINT OF CURVATURE																																																																																																																																																																																																										
B.C. BEGINNING OF CURB OR BACK OF CURB	P.C.C. PORTLAND CONCRETE CEMENT																																																																																																																																																																																																										
B.C.R. BEGINNING OF CURB RETURN OR BACK OF CURB RADIUS	P.D. PAD GRADE																																																																																																																																																																																																										
B.D. BOUNDARY	P.H.P. PLASTIC HIGH PRESSURE																																																																																																																																																																																																										
B.E. BEGIN	P.I. POINT OF INTERSECTION																																																																																																																																																																																																										
B.M. BENCHMARK	P.L. PROPERTY LINE																																																																																																																																																																																																										
B.S.W. BACK OF SIDEWALK	P.P. POWER POLE																																																																																																																																																																																																										
B.V.C. BEGINNING OF VERTICAL CURVE	P.R.C. POINT OF REVERSE CURVE																																																																																																																																																																																																										
C.B. CURB AND GUTTER	PROP. PROPOSED																																																																																																																																																																																																										
C.F. CURB FACE	P.T. POINT OF TANGENT																																																																																																																																																																																																										
C.I.P. CAST IRON PIPE	P.V.C. POLYVINYL CHLORIDE PIPE																																																																																																																																																																																																										
C.L. CENTERLINE	P.V.I. POINT OF VERTICAL INTERSECTION																																																																																																																																																																																																										
C.M.P. CORRUGATED METAL PIPE	PMIT. PERMIT																																																																																																																																																																																																										
CONC. CONCRETE	Q. RATE OF FLOW																																																																																																																																																																																																										
CONSTR. CONSTRUCT, CONSTRUCTION	R. RADIUS																																																																																																																																																																																																										
D.C. DEEPENED CURB	R.C.P. REINFORCED CONCRETE PIPE																																																																																																																																																																																																										
D.I. DROP INLET	R.T. RIGHT																																																																																																																																																																																																										
D.M. DIAMETER	R/W. RIGHT OF WAY																																																																																																																																																																																																										
D.I.P. DUCTILE IRON PIPE	S. SOUTH																																																																																																																																																																																																										
D.M.H. DROP MANHOLE	S.S. SANITARY SEWER																																																																																																																																																																																																										
E.C. END OF CURVE	S.D. STORM DRAIN																																																																																																																																																																																																										
E.C.R. END OF CURB RETURN	S.H.P. STEEL HIGH PRESSURE																																																																																																																																																																																																										
E.L. ELEVATION	S.I. SHEET																																																																																																																																																																																																										
E.P. EDGE OF PAVING	S.P. IN. SPECIAL MANHOLE																																																																																																																																																																																																										
E.V.C. EDGE OF VERTICAL CURVE	STA. STATION																																																																																																																																																																																																										
EXIST. EX. EXISTING	STAND. STANDARD																																																																																																																																																																																																										
F.M. FIN. FINISHED FLOOR	STL. SIDEWALK																																																																																																																																																																																																										
F.D.C. FIRE DEPARTMENT CONNECTION	T. TANGENT DISTANCE																																																																																																																																																																																																										
F.H. FIRE HYDRANT	TEL. TELEPHONE																																																																																																																																																																																																										
F.L. FLOWLINE	T.O.C. TOP OF CURB																																																																																																																																																																																																										
G. GAS	T.A.H. TOP OF MANHOLE																																																																																																																																																																																																										
G.B. GRADE BREAK	T.O.W. TOP OF WALL																																																																																																																																																																																																										
H. HEIGHT	T.O.W. TRANSITION																																																																																																																																																																																																										
H.O.R. HORIZONTAL	T.S.C. TRAFFIC SIGNAL CONDUIT																																																																																																																																																																																																										
H.P. HIGH POINT	T.S.W. TOP OF SIDEWALK																																																																																																																																																																																																										
I.S. INSIDE DIAMETER	V.C. VERTICAL CURVE																																																																																																																																																																																																										
I.V. INVERT	V.C.P. VERTICAL CLAY PIPE																																																																																																																																																																																																										
L. LARGESIDE	VERT. VERTICAL																																																																																																																																																																																																										
L.A.T. LATERAL	V.V. VALLEY VUTTER																																																																																																																																																																																																										
L.F. LINEAL FEET	W. WEST																																																																																																																																																																																																										
L.T. LEFT																																																																																																																																																																																																											
M. MAXIMUM																																																																																																																																																																																																											
M.H. MANHOLE																																																																																																																																																																																																											
M.N. MINIMUM																																																																																																																																																																																																											
M.C. NOT IN CONTRACT																																																																																																																																																																																																											
N.O. NUMBER																																																																																																																																																																																																											
CITY OF LAS VEGAS GRADING NOTES	CITY OF LAS VEGAS TRAFFIC NOTES	CITY OF LAS VEGAS SEWER NOTES	BENCHMARK	APPROVALS																																																																																																																																																																																																							
1. IN THE EVENT THAT ANY UNFORESEEN CONDITIONS NOT COVERED BY THESE NOTES ARE ENCOUNTERED DURING GRADING OPERATIONS, THE OWNER/ENGINEER SHALL BE IMMEDIATELY NOTIFIED FOR DIRECTION. 2. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PERFORM ALL NECESSARY CUTS AND FILLS WITHIN THE LIMITS OF THIS PROJECT AND THE RELATED OFF-SITE WORK, SO AS TO GENERATE THE DESIRED SUBGRADE, FINISH GRADES AND SLOPES SHOWN. 3. CONTRACTOR SHALL TAKE FULL RESPONSIBILITY FOR ALL EXCAVATION, ADEQUATE SHORING SHALL BE DESIGNED AND PROVED BY THE CONTRACTOR TO PREVENT UNDERMINING OF ANY ADJACENT FEATURES OR FACILITIES AND/OR CAVING OF THE EXCAVATION. 4. THE CONTRACTOR IS WARNED THAT AN EARTHWORK BALANCE WAS NOT NECESSARILY THE INTENT OF THIS PROJECT. ANY ADDITIONAL MATERIAL REQUIRED OF LEFTOVER MATERIAL FOLLOWING EARTHWORK OPERATIONS BECOMES THE RESPONSIBILITY OF THE CONTRACTOR. 5. THE GRADING CONTRACTOR IS RESPONSIBLE TO COORDINATE WITH THE OWNER TO PROVIDE FOR THE REQUIREMENTS OF THE PROJECT STORM WATER POLLUTION PREVENTION PLAN (SWPPP) AND ASSOCIATED PERMIT. 6. CONTRACTOR SHALL GRADE TO THE LINES AND ELEVATIONS SHOWN ON THE PLANS WITHIN THE FOLLOWING HORIZONTAL AND VERTICAL TOLERANCES AND DEGREES OF COMPACTION, IN THE AREAS INDICATED: <table border="1"><thead><tr><th></th><th>HORIZONTAL</th><th>VERTICAL COMPACTION</th></tr></thead><tbody><tr><td>A. PAVEMENT AREA SUBGRADE</td><td>0.1"±</td><td>+0.0' TO -0.1" AS INDICATED ON PLAN</td></tr><tr><td>B. ENGINEERED FILL</td><td>0.5"±</td><td>+0.1' TO -0.1" AS INDICATED ON PLAN</td></tr></tbody></table> 7. COMPACTION TESTING WILL BE PERFORMED BY THE OWNER OR HIS REPRESENTATIVE AND COPIES OF TEST RESULTS WILL BE PROVIDED TO THE CITY. 8. ALL CUT AND FILL SLOPES SHALL BE PROTECTED UNTIL EFFECTIVE EROSION CONTROL HAS BEEN ESTABLISHED. 9. THE USE OF POTABLE WATER WITHOUT A SPECIAL PERMIT FOR BUILDING OR CONSTRUCTION PURPOSES INCLUDING CONSOLIDATION OF BACK FILL OR DUST CONTROL IS PROHIBITED. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS FOR CONSTRUCTION WATER. 10. THE CONTRACTOR SHALL MAINTAIN THE STREETS, SIDEWALKS AND ALL OTHER PUBLIC RIGHT-OF-WAY IN A CLEAN, SAFE AND USABLE CONDITION. ALL SPILLS OF SOIL, ROCK OR CONSTRUCTION DEBRIS SHALL BE PROMPTLY REMOVED FROM THE PUBLICLY OWNED PROPERTY DURING CONSTRUCTION AND UPON COMPLETION OF THE PROJECT. ALL ADJACENT PROPERTY, PRIVATE OR PUBLIC SHALL BE MAINTAINED IN A CLEAN, SAFE AND USABLE CONDITION. 11. IN THE EVENT THAT ANY TEMPORARY CONSTRUCTION ITEM IS REQUIRED THAT IS NOT SHOWN ON THESE DRAWINGS, THE OWNER AGREES TO PROVIDE AND INSTALL SUCH ITEM AT HIS OWN EXPENSE AND AT THE DIRECTION OF THE CITY ENGINEER. TEMPORARY CONSTRUCTION INCLUDES DITCHES, BERMS, ROAD SIGNS AND BARRICADES, ETC.		HORIZONTAL	VERTICAL COMPACTION	A. PAVEMENT AREA SUBGRADE	0.1"±	+0.0' TO -0.1" AS INDICATED ON PLAN	B. ENGINEERED FILL	0.5"±	+0.1' TO -0.1" AS INDICATED ON PLAN	1. ALL CONSTRUCTION SIGNING, BARRICADES, AND TRAFFIC DELINEATION SHALL CONFORM TO THE "NEVADA WORK ZONE TRAFFIC CONTROL HANDBOOK", LATEST EDITION, AND TO THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES", LATEST EDITION. 2. THE STREET SIGN CONTRACTOR SHALL OBTAIN STREET NAMES AND BLOCK NUMBERING FROM THE PLANNING DEPARTMENT PRIOR TO CONSTRUCTION. 3. BEFORE ANY WORK IS STARTED IN THE RIGHT-OF-WAY, THE CONTRACTOR SHALL INSTALL ALL ADVANCE WARNING SIGNS FOR THE CONSTRUCTION ZONE. THE CONTRACTOR SHALL INSTALL TEMPORARY STOP SIGNS AT ALL NEW STREET ENCROACHMENTS INTO EXISTING CITY STREETS WHERE WARRANTED IMMEDIATELY AFTER FIRST GRADING WORK IS ACCOMPLISHED, AND SHALL MAINTAIN SAID SIGNS UNTIL PERMANENT SIGNS ARE INSTALLED. 4. WHEN A DESIGNATED "SAFE ROUTE TO SCHOOL" IS ENCROACHED UPON BY A CONSTRUCTION WORK ZONE AND PUBLIC WORKS STAFF IDENTIFIES A NEED FOR STUDENTS TO BE ASSISTED IN THE SAFE CROSSING THROUGH THAT WORK ZONE, THE CONTRACTOR SHALL BE REQUIRED TO PROVIDE A QUALIFIED "CROSSING GUARD". THE GUARD SHALL BE PRESENT FOR THE FULL DURATION OF TIME THAT CHILDREN ARE LIKELY TO BE PRESENT. 5. IF THE IMPROVEMENTS NECESSITATE THE OBLITERATION, TEMPORARY OBSTRUCTION, TEMPORARY REMOVAL OR RELOCATION OF ANY EXISTING TRAFFIC PAVEMENT MARKING, SUCH PAVEMENT MARKING SHALL BE RESTORED OR REPLACED WITH LIKE MATERIALS TO THE SATISFACTION OF THE CITY TRAFFIC ENGINEER. 6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING AND INSTALLING ALL PERMANENT SIGNS SHOWN ON THE PLANS. STREET NAME SIGNS SHALL CONFORM IN THEIR ENTIRETY TO CURRENT CITY STANDARDS. ALL OTHER SIGNS SHALL BE STANDARD SIZE UNLESS OTHERWISE SPECIFIED ON THE PLANS. ALL SIGN POSTS SHALL BE INSTALLED IN ACCORDANCE WITH THE CURRENT CITY STANDARDS. 7. WHEN A PROPOSED STREET LIGHT STANDARD IS LOCATED WITHIN FIVE (5') FEET OF ANY PROPOSED SIGN SHOWN ON THE PLANS TO BE MOUNTED ON A SIGNPOST, THE SIGN SHALL BE MOUNTED ON THE STREET LIGHT STANDARD AND THE SIGNPOST SHALL BE ELIMINATED. 8. ALL PERMANENT TRAFFIC CONTROL DEVICES CALLED FOR HEREON SHALL BE IN PLACE AND IN FINAL POSITION PRIOR TO ALLOWING ANY PUBLIC TRAFFIC ONTO THE PORTIONS OF THE ROAD(S) BEING IMPROVED HEREUNDER, REGARDLESS OF THE STATUS OF COMPLETION OF PAVING OR OTHER OFF-SITE IMPROVEMENTS CALLED FOR BY THESE PLANS. 9. STREET SIGNS AND STOP SIGNS SHALL BE INSTALLED PER CITY STANDARD SPECIFICATIONS FOR PLACEMENT OF STREET NAME SIGNS. 10. THE CONTRACTOR SHALL PROVIDE BARRICADES, SIGNS, FLASHERS, OTHER EQUIPMENT AND FLAG PERSONS NECESSARY TO INSURE THE SAFETY OF WORKERS AND VISITORS. 11. WORK IN PUBLIC STREETS, ONCE BEGUN, SHALL BE EXPEDITED TO COMPLETION SO AS TO PROVIDE MINIMUM INCONVENIENCE TO ADJACENT PROPERTY OWNERS AND TO THE TRAVELING PUBLIC. 12. THE CONTRACTOR SHALL BE RESPONSIBLE FOR NOTIFYING CITIZENS AREA TRANSIT (C.A.T.) IF THE CONSTRUCTION INTERRUPTS OR RELOCATES A BUS STOP OR HAS AN ADVERSE EFFECT ON BUS SERVICE ON THAT STREET TO ARRANGE FOR TEMPORARY RELOCATION OF STOP. 13. GUARDS SHALL BE OBTAINED BY CONTACTING THE METROPOLITAN POLICE DEPARTMENT SPECIAL EVENTS UNIT (PHONE NO. IS 229-3442) WHO WILL PROVIDE OFFICERS PROPERLY TRAINED IN TRAFFIC CONTROL. FEES FOR THE USE OF THESE OFFICERS SHALL BE SET UP BY METRO AND WILL BE PAID BY THE CONTRACTOR. THE CONTRACTOR IS RESPONSIBLE FOR ALL ARRANGEMENTS WITH METRO.	1. ALL CONSTRUCTION AND MATERIALS SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE DESIGN AND CONSTRUCTION STANDARDS FOR WASTEWATER COLLECTIONS SYSTEMS AND THE UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS' CONSTRUCTION OFF-SITE IMPROVEMENTS, CLARK COUNTY AREA, NEVADA, AS AMENDED. IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO BE AWARE OF THE CONTENTS OF THE ABOVE SPECIFICATIONS. 2. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO PERFORM CONSTRUCTION AS PER PLANS. ANY ADDITIONS, DELETIONS, OR CHANGES SHALL FIRST MEET WITH THE APPROVAL OF THE CITY ENGINEER. 3. CHISEL "S" OR "G" IN CURBS WHERE SEWER OR GAS LATERALS PASS UNDER THE CURB. 4. POLYVINYL (PVC) SEWER PIPE SHALL MEET ASTM D-3034 SDR 35 SPECIFICATIONS, INSTALLED WITH SAND BEDDING AND BACKFILL OF TYPE II AGGREGATE BASE. 5. ALL MANHOLES PAVED IN STREETS EIGHTY (80') FOOT R/W AND LARGER SHALL HAVE CONCRETE COLLARS. STREETS LESS THAN EIGHTY (80') FOOT R/W WILL REQUIRE RETROFIT IF PAVING DOES NOT CONFORM TO CITY STANDARDS AT THE MANHOLE. 6. TEE SADDLES SHALL BE USED TO CONNECT SEWER LATERALS TO EXISTING MAIN LINES UP TO TWELVE INCH (12") DIAMETER. CONNECTIONS TO FIFTEEN INCH (15") OR LARGER MAINS SHALL REQUIRE SPECIAL PROCEDURES. IN LINE "Y"'S SHALL BE USED ON LINES TWELVE INCHES (12") OR ABOVE. 7. A SEWER MAIN CROSSING OVER A WATER MAIN OR LESS THAN EIGHTEEN INCH (18") UNDER A WATER MAIN, MUST BE REINFORCED CONCRETE ENCASED FOR A DISTANCE NOT LESS THAN TEN FEET (10') TO EACH SIDE OF THE CENTERLINE OF THE WATER MAIN. 8. ALL CONTRACTORS INSTALLING SEWER MAINS THAT WILL BE UNDER THE JURISDICTION OF THE CITY OF LAS VEGAS MUST BE STATE OF NEVADA CLASS "A" CONTRACTORS. 9. THE CITY OF LAS VEGAS WILL NOT ACCEPT ANY SEWER MAINS WHICH HAVE A VERTICAL DEFLECTION OF MORE THAN ONE TENTH (0.1) OF A FOOT FROM THE APPROVED CONSTRUCTION PLANS AT ANY LOCATION. SEWER MAINS FOUND TO EXCEED THIS TOLERANCE WILL HAVE TO BE REPAIRED OR REMOVED AND REPLACED TO THE SATISFACTION OF THE CITY ENGINEER PRIOR TO ACCEPTANCE BY THE CITY OF LAS VEGAS. 10. INSTALLATION OF CURVED SEWER REQUIRES SPECIAL CONSTRUCTION PROCEDURES AND INSPECTIONS. CONTACT CITY OF LAS VEGAS CONSTRUCTION SERVICES 24 HOURS PRIOR TO INSTALLATION.	RIVET & PLATE IN TOP OF CURB, 7331 WEST CHEYENNE AVENUE AT FIRE STATION #42, SOUTH CURB LINE. ELEV: NAVD88 711.9736 METERS=2335.87 FEET OLV00 15N4	NEVADA POWER COMPANY approves the point of service to the street light system. This shall not be deemed to consent either placement of the light pole which may be in conflict with Nevada Power Company's prior rights or facilities. This approval is only for the placement and clearance of street light and signal light installations. <i>Quanita Romay</i> 7-44-98 NEVADA POWER COMPANY DATE <i>N/A</i> SOUTHWEST GAS DATE <i>Donny P. Robinson</i> 7-13-98 LAS VEGAS VALLEY WATER DISTRICT DATE <i>Agnes Mihal</i> 7-17-98 CLV FIRE MARSHAL DATE <i>Charles Kajkowski</i> 8-12-98 CITY PLANNING ENGINEER DATE APPROVAL OF THESE PLANS BY THE CITY ENGINEER IS LIMITED TO THOSE IMPROVEMENTS CONSTRUCTED IN THE DEDICATED RIGHTS-OF-WAY AND/OR DEDICATED EASEMENTS. THIS APPROVAL DOES NOT AUTHORIZE THE CONSTRUCTION OF ANY IMPROVEMENTS THAT DEVIATE FROM ADOPTED STANDARDS AND/OR SPECIFICATIONS EXCEPT THOSE SPECIFICALLY LISTED UNDER "DEVIATIONS FROM STANDARDS". THE ENGINEER SHALL RESOLVE ANY DEVIATION OTHER THAN THOSE LISTED IN "DEVIATIONS FROM STANDARDS" IN FAVOR OF THE UNIFORM STANDARDS DRAWINGS AND SPECIFICATIONS, CLARK COUNTY AREA, NEVADA.																																																																																																																																																																																														
	HORIZONTAL	VERTICAL COMPACTION																																																																																																																																																																																																									
A. PAVEMENT AREA SUBGRADE	0.1"±	+0.0' TO -0.1" AS INDICATED ON PLAN																																																																																																																																																																																																									
B. ENGINEERED FILL	0.5"±	+0.1' TO -0.1" AS INDICATED ON PLAN																																																																																																																																																																																																									
ASSESSOR'S PARCEL NUMBER	ASSESSOR'S PARCEL NUMBER	ASSESSOR'S PARCEL NUMBER	ASSESSOR'S PARCEL NUMBER	ASSESSOR'S PARCEL NUMBER																																																																																																																																																																																																							
APN 138-15-602-001	APN 138-15-602-001	APN 138-15-602-001	APN 138-15-602-001	APN 138-15-602-001																																																																																																																																																																																																							

MARTIN & MARTIN
CIVIL ENGINEERS
1909 S. JONES BLVD.
SUITE B
LAS VEGAS, NEVADA 89102
PHONE (702) 248-8000

Planning
Design
Architecture
2480 EAST TOMPKINS AVENUE
SUITE 222
LAS VEGAS, NEVADA 89121
(702) 486-1160

W.D. WELLS-INSLEY ARCHITECTS

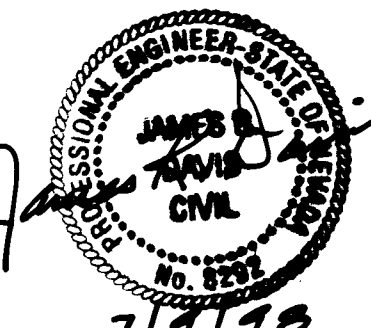

COVER AND APPROVAL SHEET
PK OFFICE BUILDING

no	description of revisions	date	name

date	job number	design by	drawn by	checked by
7-8-98	1682.00	J. WAKENHUT	V. WINFORD	JAMES R. DAVIS, P.E.

sheet number
C1.01
SHEET 1 OF 5
107-V2877

