
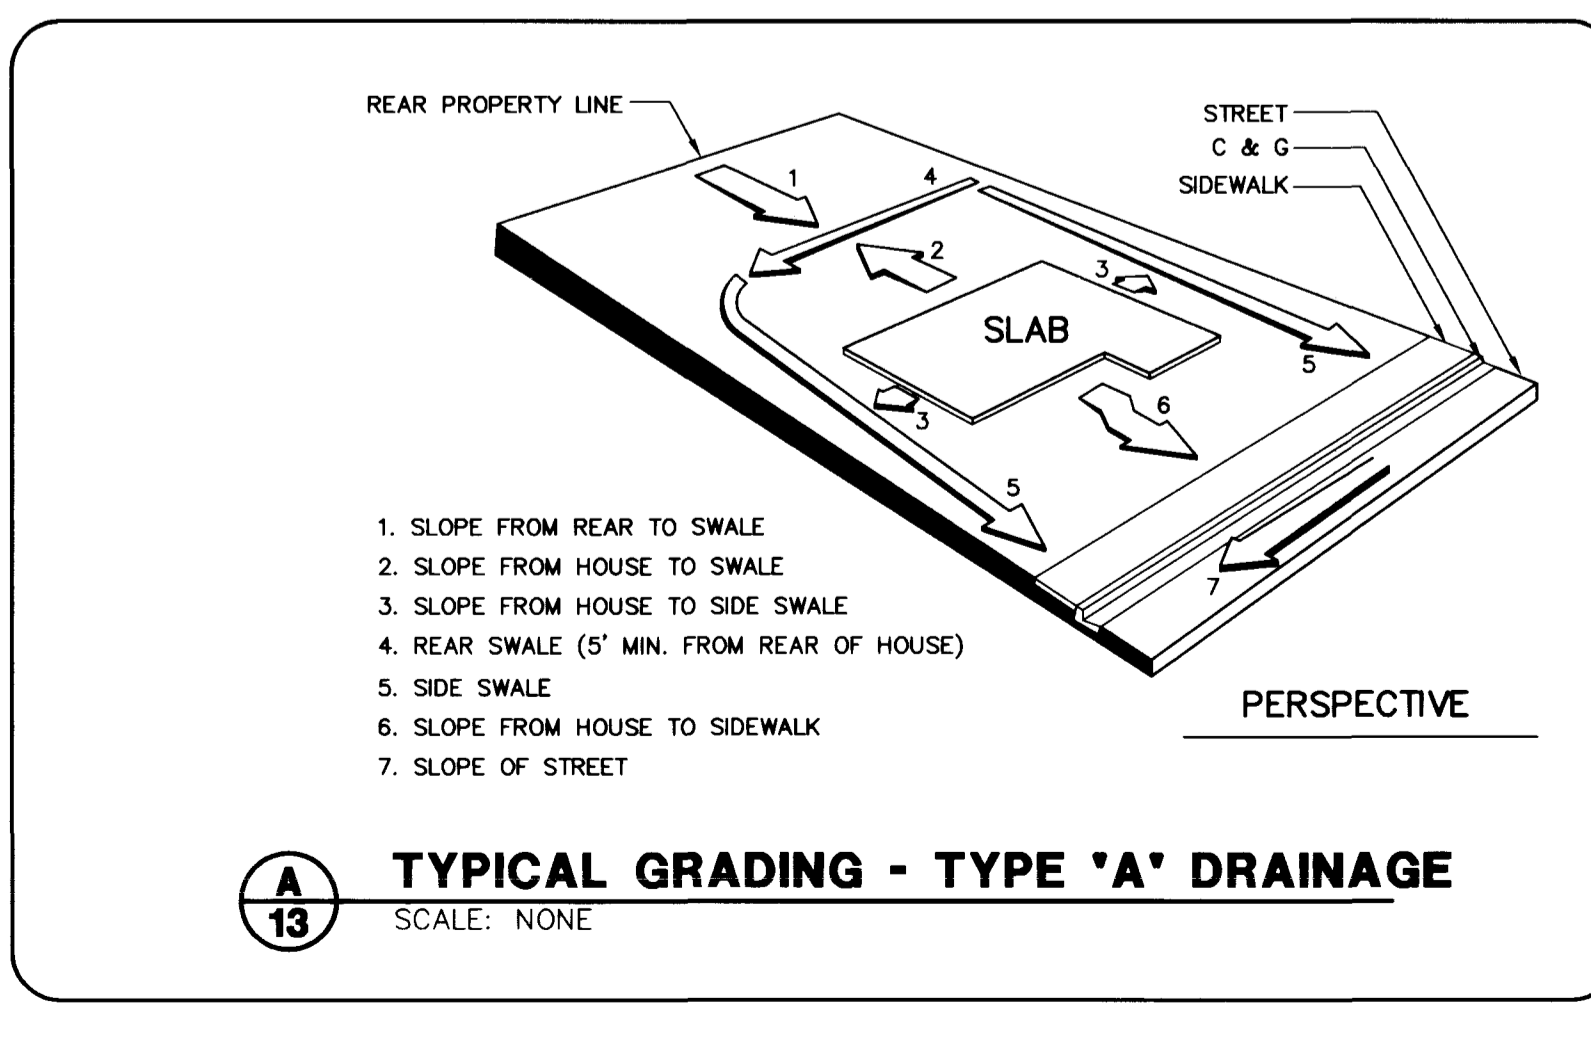


I certify that this grading plan conforms to the approved drainage study for this site on file at the City of Las Vegas

*Milo Terzian* (DATE) 5/27/98  
MILO C. TERZIAN, P.E. Lic. No. 12846

- B 13 GRADING NOTES**  
SCALE: NONE
- INDICATED GRADES OTHER THAN T.C., F.G. & GUTTER F.L. ARE ROUGH GRADES. (0.3' LOWER THAN FINISHED GRADE).
  - THE ROUGH GRADING PLANS SHALL BE ON THE JOB SITE AT ALL TIMES. THE ROUGH GRADING SHALL BE FINISHED IN CONFORMANCE WITH THE LINES AND GRADES SHOWN ON THE PLANS. THE GRADING QUANTITIES ARE BASED ON THE ELEVATION AND DETAILS SHOWN ON THE PLANS. ANY DEVIATIONS FROM THE PLANS WILL RESULT IN QUANTITY CHANGES.
  - CARE SHALL BE EXERCISED IN GRADING CORNER LOTS.
  - ROUGH PAD ELEVATIONS SHALL BE GRADED TO WITHIN 0.3' OF THE PAD ELEVATIONS SHOWN ON THE PLANS.
  - SOILS REPORT PREPARED BY WESTERN TECHNOLOGIES INC., PROJECT NO. 412BC019, DATED FEBRUARY 17, 1998.
  - THIS PARCEL DEVELOPER IS RESPONSIBLE FOR ALL FILL MATERIAL, GRADING AND RETAINING WALLS WITHIN SUMMERLIN'S H.O.A. COMMON LOT.
  - ROUGH GRADING TO NAPA HILLS BY LEWIS HOMES, UNITS ONE AND TWO MUST BE DONE SIMULTANEOUSLY.

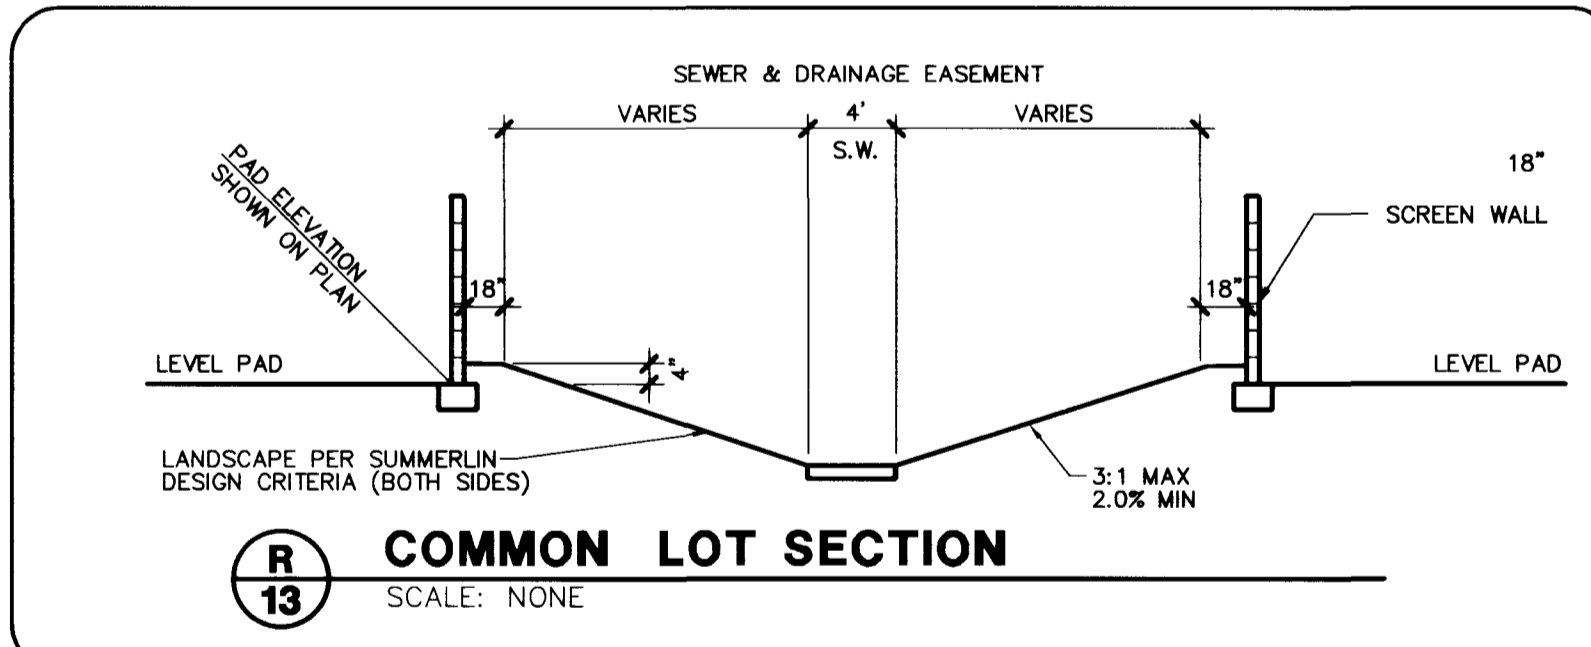

RECOMMENDED	DATE	DESCRIPTION	DATE	APPROVAL
5/27/98				

ENGINEER STATE OF NEVADA PROFESSIONAL CIVIL





RECOMMENDED DATE 5/27/98 P.E. NO. 12846

G.C. WALLACE, INC. Engineering/Architecture  
1835 SOUTH SANDY BLVD. LAS VEGAS, NEVADA 89102  
PHONE: (702) 363-8200

**NAPA HILLS BY LEWIS HOME UNIT NO. 2**



**GRADING AND WALL DETAILS**

SHEET 13 OF 14 SHEETS



DESIGNED BY: [Signature] DATE: [Date]

1. SQUARE BLADES
  2. ALL SQUARE BLADES SHALL BE 4" MINIMUM THICKNESS
  3. ALL SQUARE BLADES SHALL BE 4" MINIMUM THICKNESS AT THE CORNER
  4. ALL SQUARE BLADES SHALL BE 4" MINIMUM THICKNESS AT THE CORNER
  5. ALL SQUARE BLADES SHALL BE 4" MINIMUM THICKNESS AT THE CORNER
  6. ALL SQUARE BLADES SHALL BE 4" MINIMUM THICKNESS AT THE CORNER
  7. ALL SQUARE BLADES SHALL BE 4" MINIMUM THICKNESS AT THE CORNER
  8. ALL SQUARE BLADES SHALL BE 4" MINIMUM THICKNESS AT THE CORNER
1. GRADING NOTES



STATE OF FLORIDA  
PROFESSIONAL ENGINEER  
[Signature]  
DATE: [Date]

13