

MANHOLE SCHEDULE

MH #	RIM	INV IN	INV OUT	STA
1	3186.0±	3173.00	3173.36	0+00.00
2	3185.4±	3173.00	3172.80	0+59.24
3	3186.3±	3171.32	3171.32	4+29.24
4	3188.2±	3169.84	3169.64	7+99.24
5	3187.9±	3169.42	3169.22	8+53.96
6	3184.5±	3169.00	3168.80	9+08.68
7	3176.3±	3164.34	3164.14	11+56.87
8	3170.4±	3162.05	3161.85	12+29.33
9	3167.7±	3155.22	3155.02	13+14.35
10	3155.8±	3151.07	3150.87	16+55.34
11	3158.2±	3148.03	3147.83	17+97.49
12	3155.2±	3141.28	3141.08	19+42.20
13	3151.0±	3137.33	3137.13	20+42.75


Avoid cutting underground utility lines. It's costly.

Call before you Dig.

1-800-227-2600

CALL BEFORE YOU DIG OVERHEAD

1-702-593-6111

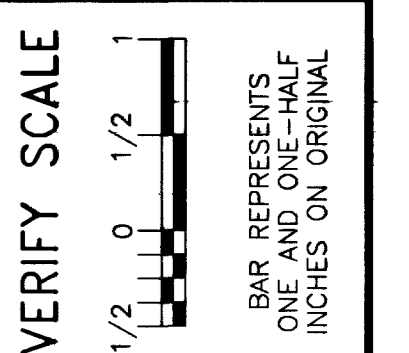


SCALE
HORIZ. SCALE
VERT. SCALE

3205 ZONE RESERVOIR EXPANSION

OFF-SITE SEWER PROFILES

1046C07.DWG Plot: XX/XX/XX XX:XX

DRAWN BY: 04/12/02
CHECKED BY: 04/12/02
RECOMMENDED BY: DATE
L. STEVEN ANDERSON
ACCEPTED BY: DATE
DESIGN MANAGER DATE

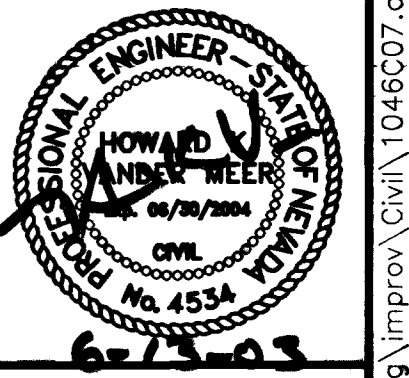

CONTRACT NUMBER
C1046
DRAWING NUMBER C7
SHEET 13 OF 95

CLV DRAWING #565-388
CLV CIVIL SHEET 13 OF 30