


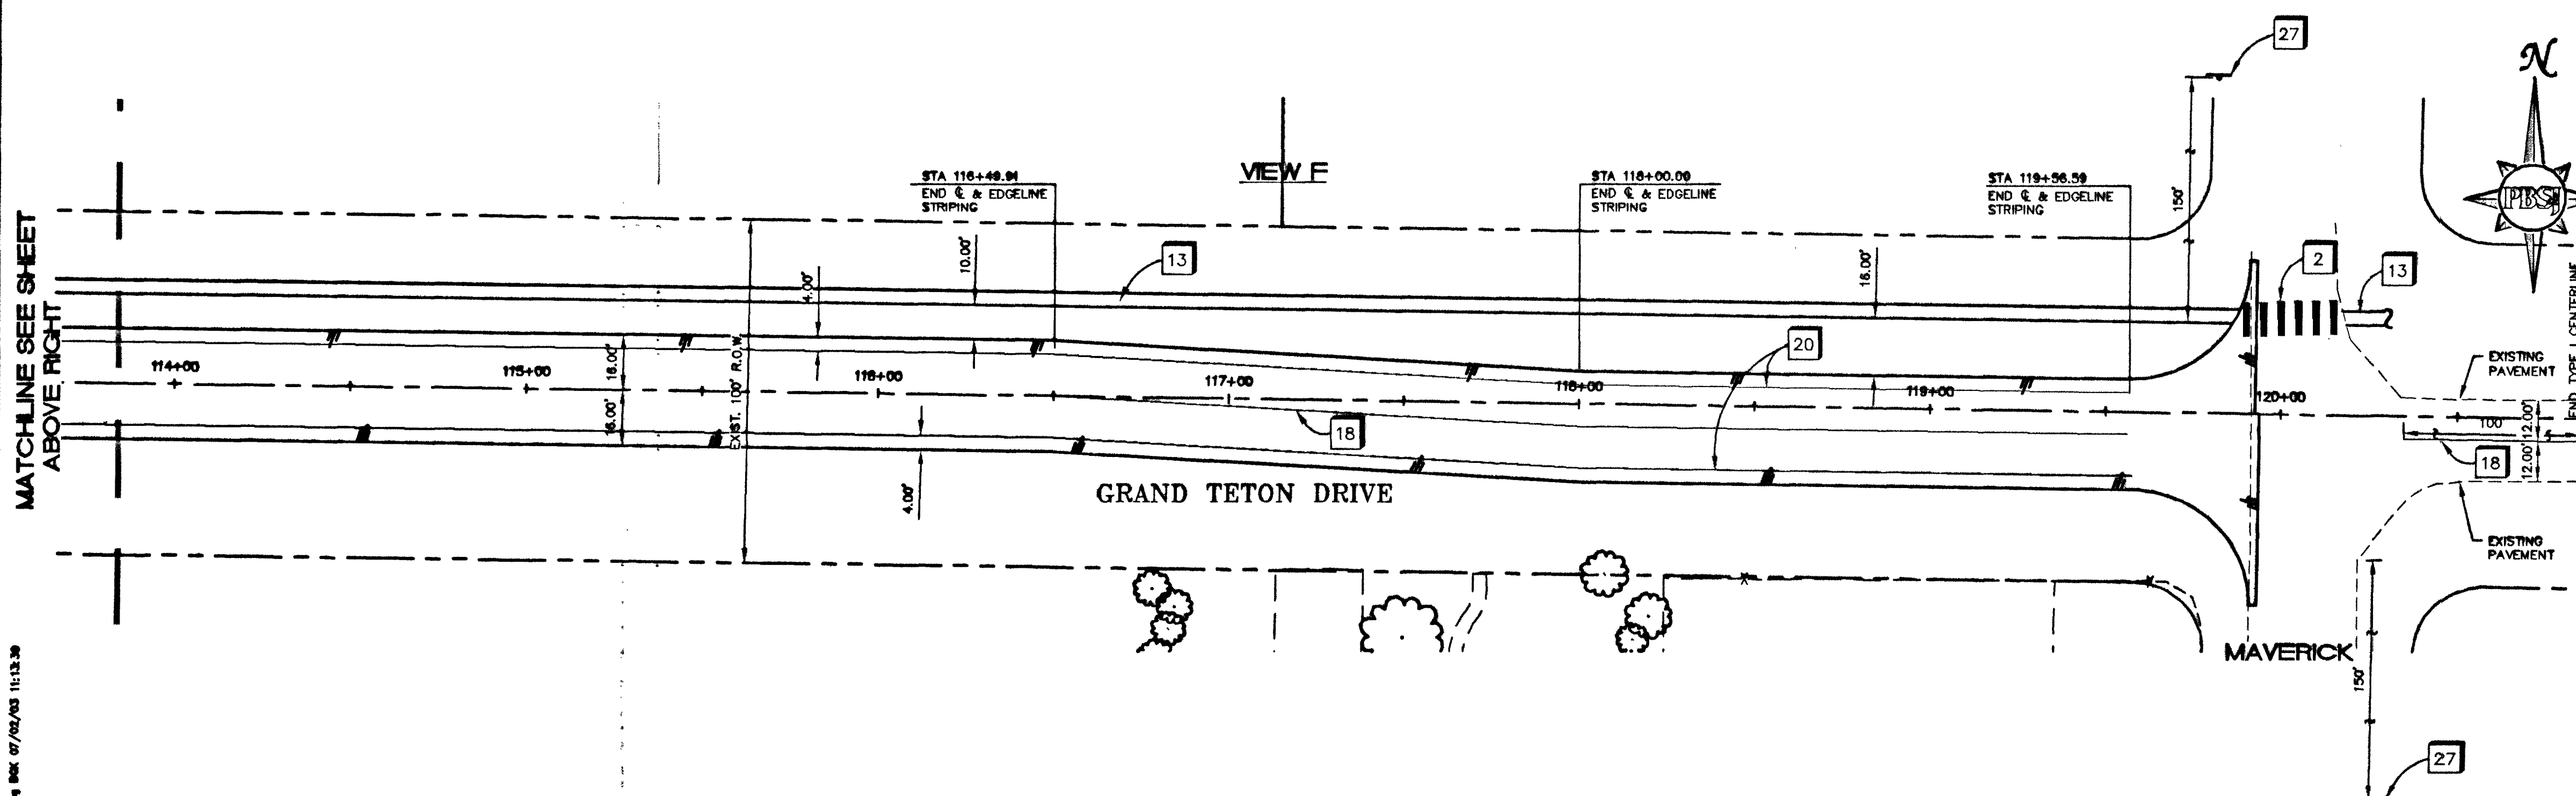

GRAPHIC SCALE

(IN FEET)

1 inch = 30 ft.

- 1 INSTALL 1-1/4" STREIGHTLIGHT CONDUIT (2) #4 AND (1) #6 WITH CONDUCTOR WRES. THW (BENEATH SIDEWALK, C.C. SIDS.)
 - 2 INSTALL CROSSWALK PER DETAIL "A" ON SHEET C4.12
 - 3 4" WIDE WHITE PARKING STRIPE (ON-SITE)
 - 4 INSTALL 200 AMP SERVICE PEDESTAL PER C.C.A.U.S.D. No. 330, 331, 332.1, AND 335.1
 - 5 INSTALL STUB STREETLIGHT POLE, 10' HIGH, WITH FABRICATED CAP PER C.C.A.U.S.D. No. 313, 314 & 321. PIPE ARM AND LUMINAIRE NOT REQUIRED. PULL AND STUB STREETLIGHT WIRING INTO BASE OF STUB POLE FOR FUTURE EXTENSION. (FUTURE 100 WATT HIGH PRESSURE SODIUM LIGHT)
 - 6 INSTALL TYPE 2 CENTERLINE PER C.C.A.U.S.D. No. 244 (RAISED PAVEMENT MARKERS)
 - 7 STREETLIGHTS TO BE INSTALLED IN BACK PORTION OF SIDEWALK PER C.C.A.U.S.D. No. 320.
 - 8 INSTALL R7-1APR ON STREETLIGHT POLE OR GROUND MOUNTED POLE AS INDICATED ON PLAN.
 - 9 SIGHT VISIBILITY ZONE -- SEE SIGHT VISIBILITY RESTRICTION ZONE DETAIL ON SHEET C4.12 FOR DIMENSIONS.
 - 10 INSTALL STUB STREETLIGHT POLE, 10' HIGH, WITH FABRICATED CAP PER C.C.A.U.S.D. No. 313, 314 & 321. PIPE ARM AND LUMINAIRE NOT REQUIRED. PULL AND STUB STREETLIGHT WIRING INTO BASE OF STUB POLE FOR FUTURE EXTENSION. (FUTURE 250 WATT HIGH PRESSURE SODIUM LIGHT)
 - 11 INSTALL 125 AMP PAD MOUNTED TRANSFORMER PER NPC STDS. AND PER APPROVED NPC DRAWINGS
 - 12 INSTALL 30" RI-1 "STOP" SIGN
 - 13 INSTALL 4' TEMP. A.C. WALKWAY PER DETAIL "B" ON SHEET C4.12. AT LOCATIONS SHOWN ON THIS SHEET.
 - 16 INSTALL 250 WATT HIGH PRESSURE SODIUM LIGHT PER C.C.A.U.S.D. No. 313, 314, 320, AND 321.
 - 17 INSTALL TRAFFIC SIGNAL UNDERGROUND PER DETAIL ON SHEET C4.12
 - 18 INSTALL TYPE 1 CENTERLINE PER C.C.A.U.S.D. No. 244 (RAISED PAVEMENT MARKERS)
 - 19 INSTALL FLASHING BEACON PER DETAIL ON SHEET C4.12
 - 20 INSTALL 4" WIDE WHITE EDGLINE 4' FROM EDGE OF PAVEMENT
 - 21 INSTALL 4" WIDE WHITE EDGLINE 12" FROM EDGE OF PAVEMENT
 - 22 INSTALL 2" CONDUIT WITH 5-#12 THW COPPER (RED, BLUE, YELLOW, WHITE, AND GREEN) AND 2-#4 THW COPPER (S/L) FOR FLASHING BEACON
 - 23 INSTALL 2" PVC CONDUIT FOR LYVACS ON RAGEL ST. W/ BARE #6 WIRE, INSTALL 3" PVC CONDUIT FOR LYVACS ON TORREY PINES D. W/ BARE #6 WIRE, INSTALL 4" PVC CONDUIT FOR LYVACS ON GRAND TETON DR. W/ BARE #6 WIRE.
 - 24 INSTALL "D30" PULLBOX FOR TRAFFIC SIGNAL INTERCONNECT 500 SPACING (TYP.) SEE STANDARD SPECIFICATIONS 6236.03.01 FOR ADDITIONAL INFORMATION
 - 25 INSTALL #3 1/2 PULLBOX
 - 26 INSTALL #6 PAINTED WHITE EDGLINE 12" FROM EDGE OF PAVEMENT IN TAPER
 - 27 INSTALL S1A ASSEMBLY
 - 28 INSTALL S4A (TIMES) ASSEMBLY, TIMES TO BE DETERMINED BY C. SCHOOL DISTRICT AND APPROVED BY C.C. CIVIL ENGINEERING DIVISION
 - 29 INSTALL SS-2 "END SCHOOL ZONE" SIGN
 - 30 INSTALL S4A (WF) ASSEMBLY

715-150
C4.11