

BASIS OF BEARING

N 89°53'41" E BEING THE SOUTH LINE OF SE 1/4, SECTION 31 TO 20S, R 62E, M.D.M., CITY OF LAS VEGAS, CLARK COUNTY NEVADA AS DELINEATED ON THAT CERTAIN RECORD OF SURVEY IN FILE 66 PAGE 52, RECORDED MAY 13, 1993.

BENCHMARK

CITY OF LAS VEGAS DATUM BM CLV 2LV02-32SWS A RIVET AND
SQUARE PLATE IN TOP OF CURB @ NE CORNER OF CHARLESTON &
LAMB. NAVD 88 ELEVATION 534.458 METERS (1753.47 FEET)

CONSTRUCTION NOTES

REACH # 1	No.	ITEM
	(1)	BYPASS PUMP 36" SEWER FLOW TO SANDHILL INTERCEPTOR 51" SEWER AS PER SPECIAL PROVISION SECTION 642. REMOVE AND REPLACE BASE AND PAVEMENT AS PER DETAIL 4/C45. BID ITEM 642.01.01.
	(2)	BYPASS PUMP LOCAL FLOWS FROM 36" SEWER AND 27" SEWER TO SANDHILL INTERCEPTOR MANHOLE AT DEL AMO DRIVE PER SPECIAL PROVISION SECTION 642. PROVIDE ALL NECESSARY TRAFFIC CONTROL DURING INSTALLATION, REMOVAL, BACKFILLING AND PAVING OPERATIONS. REMOVE AND REPLACE BASE AND PAVEMENT AS PER DETAIL 4/C45. BID ITEM 642.01.01.
	(3)	PUMP 8" SEWER TO MH# 926 AS PER SPECIAL PROVISION SECTION 642. PROVIDE ALL NECESSARY TRAFFIC CONTROL DURING INSTALLATION, REMOVAL, BACKFILLING AND PAVING OPERATIONS. REMOVE AND REPLACE BASE AND PAVEMENT AS PER DETAIL 4/C45. BID ITEM 642.01.01.
REACH # 2	(4)	CONSTRUCT PERMANENT GRAVITY DIVERSION AT STA: 26+10 AS PER SPECIAL PROVISION SECTION 642. SEE DETAIL 5 ON SHEET C45. PROVIDE THE NECESSARY FLOW DIVERSIONS TO CONSTRUCT NEW SEWER MANHOLES ON 39" AND 51" SEWERS AND INSTALL NEW 39" SEWER, REMOVE AND REPLACE CURB AND MEDIAN PAVING. REPAVE TRENCH AS PER DETAIL 4/C45. BID ITEM 642.01.01
	(5)	DIVERT 8" SEWER TO NEW MH ON 39" SEWER AT STA: 26+11.58 AND PUMP 12" SS TO NEW MH ON 39" SEWER. BID ITEM 642.00.00. AND PUMP 12" SS TO NEW MH ON 39" SEWER. REMOVE AND REPLACE BASE AND PAVEMENT AS PER DETAIL 4/C45. BID ITEM 642.00.01.
	(6)	PUMP PRINCE LANE 10" SS EAST TO MH# 932 OR WEST TO ITEM 5 ABOVE PER SPECIAL PROVISION SECTION 642. REMOVE AND REPLACE BASE AND PAVEMENT AS PER DETAIL 4/C45. BID ITEM 642.00.01.
REACH # 3	(7)	PUMP 8" SS TO MH# 932 AND THROUGH EX. 33" S TO EXISTING SANDHILL INTERCEPTOR MH AT BROADALBIN ST AS PER SPECIAL PROVISION SECTION 642. REMOVE AND REPLACE BASE AND PAVEMENT AS PER DETAIL 4/C45. BID ITEM 642.01.01.
	(8)	PUMP LAMB BOULEVARD 18" SEWER WEST TO SANDHILL INTERCEPTOR JUNCTION BOX AT BROADALBIN ST AS PER SPECIAL PROVISION SECTION 642. REMOVE AND REPLACE BASE AND PAVEMENT AS PER DETAIL 4/C45. BID ITEM 642.01.01
REACH # 4	(9)	PUMP 8" S EAST TO MARION DRIVE AS PER SPECIAL PROVISION SECTION 642. REMOVE AND REPLACE BASE AND PAVEMENT AS PER DETAIL 4/C45. BID ITEM 642.01.01.
	(10)	PUMP EXISTING 8" AND FLOW FROM ITEM 9 TO THE EXISTING 36" DIVERSION FROM CHARLESTON SEWER TO THE SANDHILL RELIEF SEWER AT ARLINGTON ST. AS PER SPECIAL PROVISION SECTION 642. REMOVE AND REPLACE BASE AND PAVEMENT AS PER DETAIL 4/C45. BID ITEM 642.01.01.
REACH # 5	(11)	DIVERT 51" SEWER TO 36" SEWER VIA EXISTING 36" DIVERSION AS PER SPECIAL PROVISION SECTION 642. BID ITEM 642.01.01. PROVIDE SUPPLEMENTAL PUMPING IF 36" SEWER CANNOT CARRY WASTEWATER DIVERSION FLOW FROM 51" SEWER.

NOTE:

PROTECT WATERLINES IN PLACE. WHEREVER A WATERLINE IS ABOVE A STORM DRAIN OR SEWER WHERE COMPACTION REQUIREMENTS UNDER A WATERLINE CANNOT BE MET, BACKFILL TRENCH WITH CONTROL LOW STRENGTH MATERIAL (CLSM) TO THE SPRINGLINE OF THE WATERLINE. THIS REQUIREMENT IS FOR STRUCTURAL SUPPORT ONLY, ADDITIONAL HEALTH REGULATIONS MAY APPLY PER UDACS 2.19.

Robert J. Morgan
L.V.V.W.D.

DATE 12/15/03


sheet

C41

SHEET 41 OF 45
drawing number
307-V841

BID# 04.1730.06

MATCHLINE STA: 50+50.00 FOR
CONTINUATION SEE SHEET C40

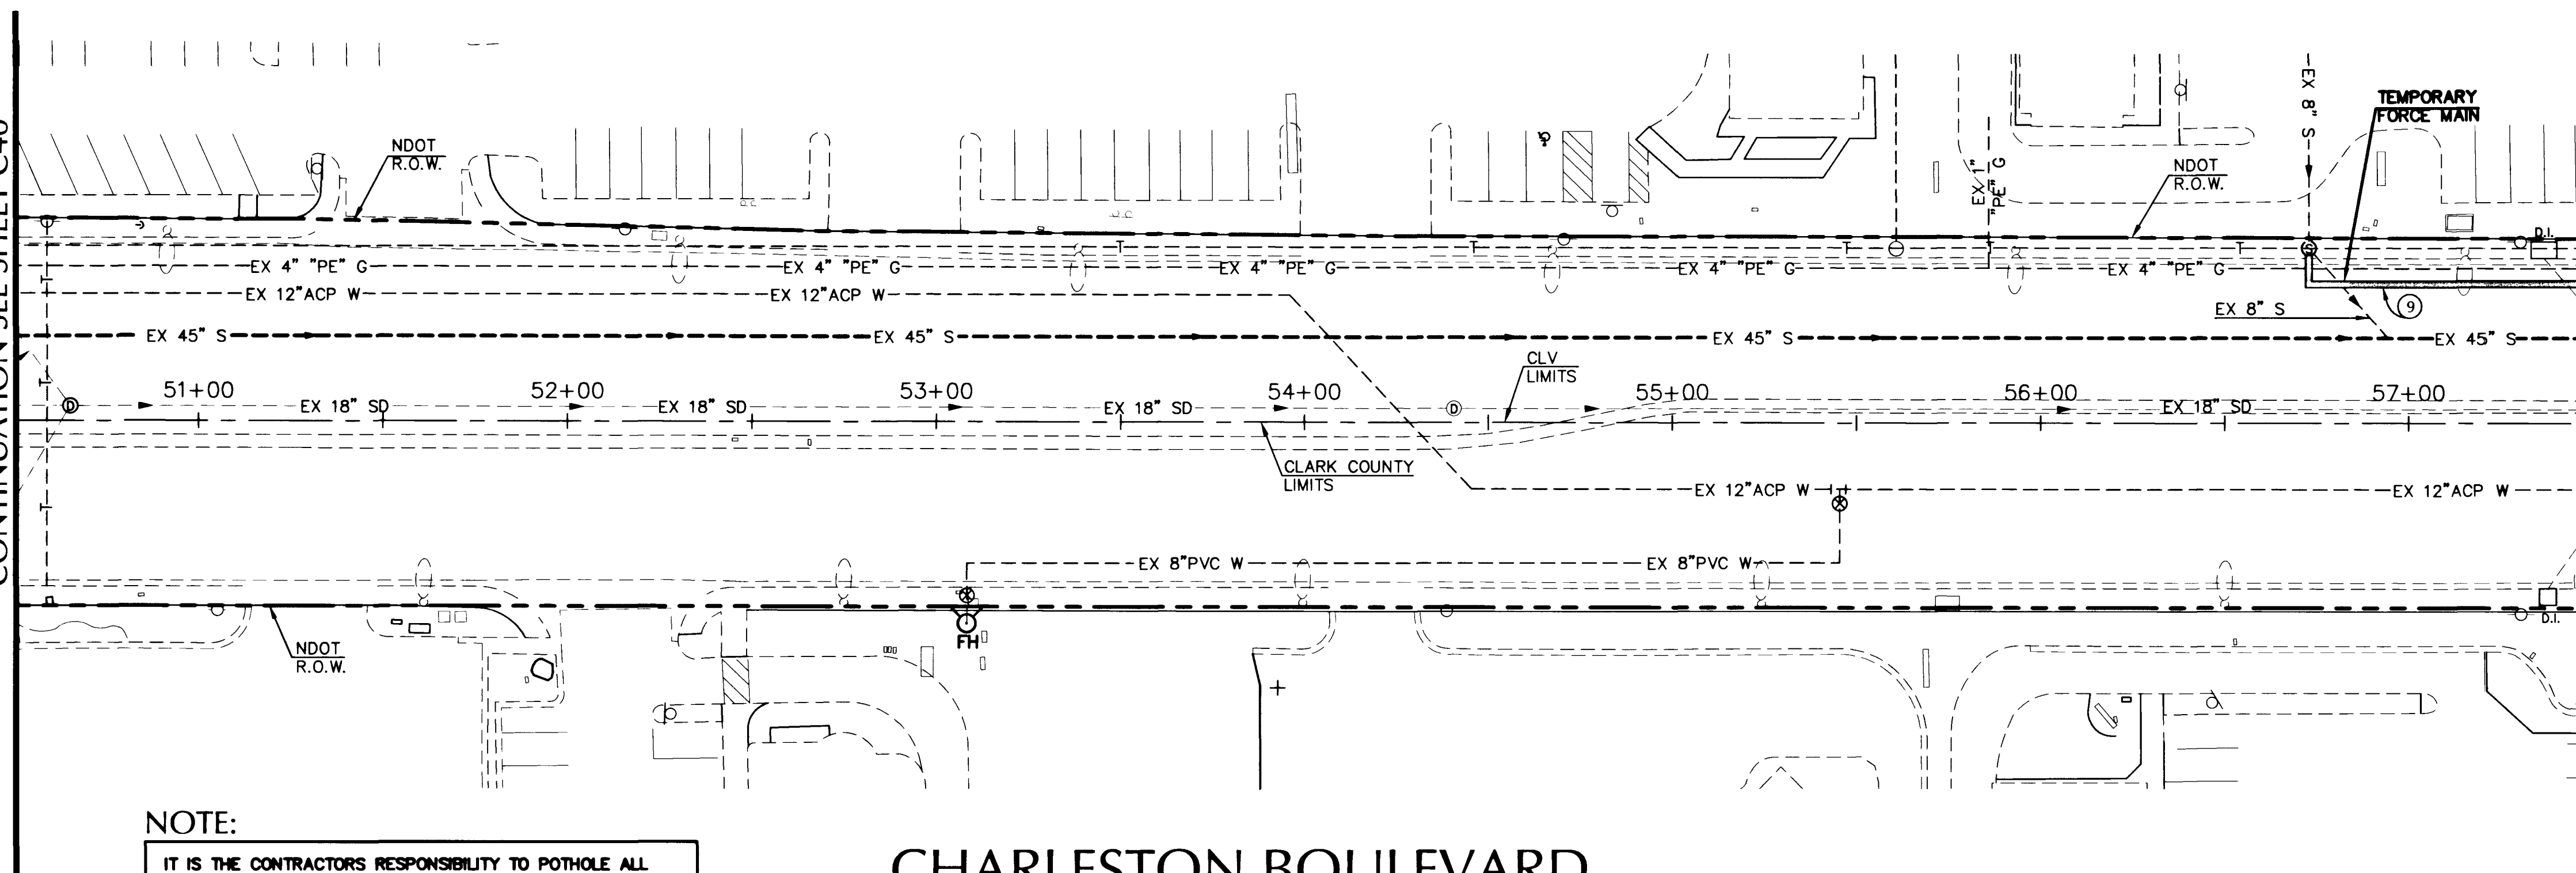


**MATCHLINE STA: 57+50.00 FOR
CONTINUATION SEE BELOW**

NOTE:

IT IS THE CONTRACTORS RESPONSIBILITY TO POTHOLE ALL WATER LINE, GAS LINE AND FORCE MAIN DIVERSION CROSSINGS WITH PROPOSED SEWER CONSTRUCTION PLANS. NOTIFY LVWD AND SWG 48HRS PRIOR TO CONSTRUCTION. PLEASE NOTIFY ENGINEER IN CASE OF ANY CONFLICTS.

CHARLESTON BOULEVARD
(SR-159)

SEE TRENCH DETAIL 4/C45. REMOVE
PIPE AND BACKFILL PER DETAIL 4/C45
AFTER DIVERSION COMPLETE. PATCH PER
NDOT REQUIREMENTS.

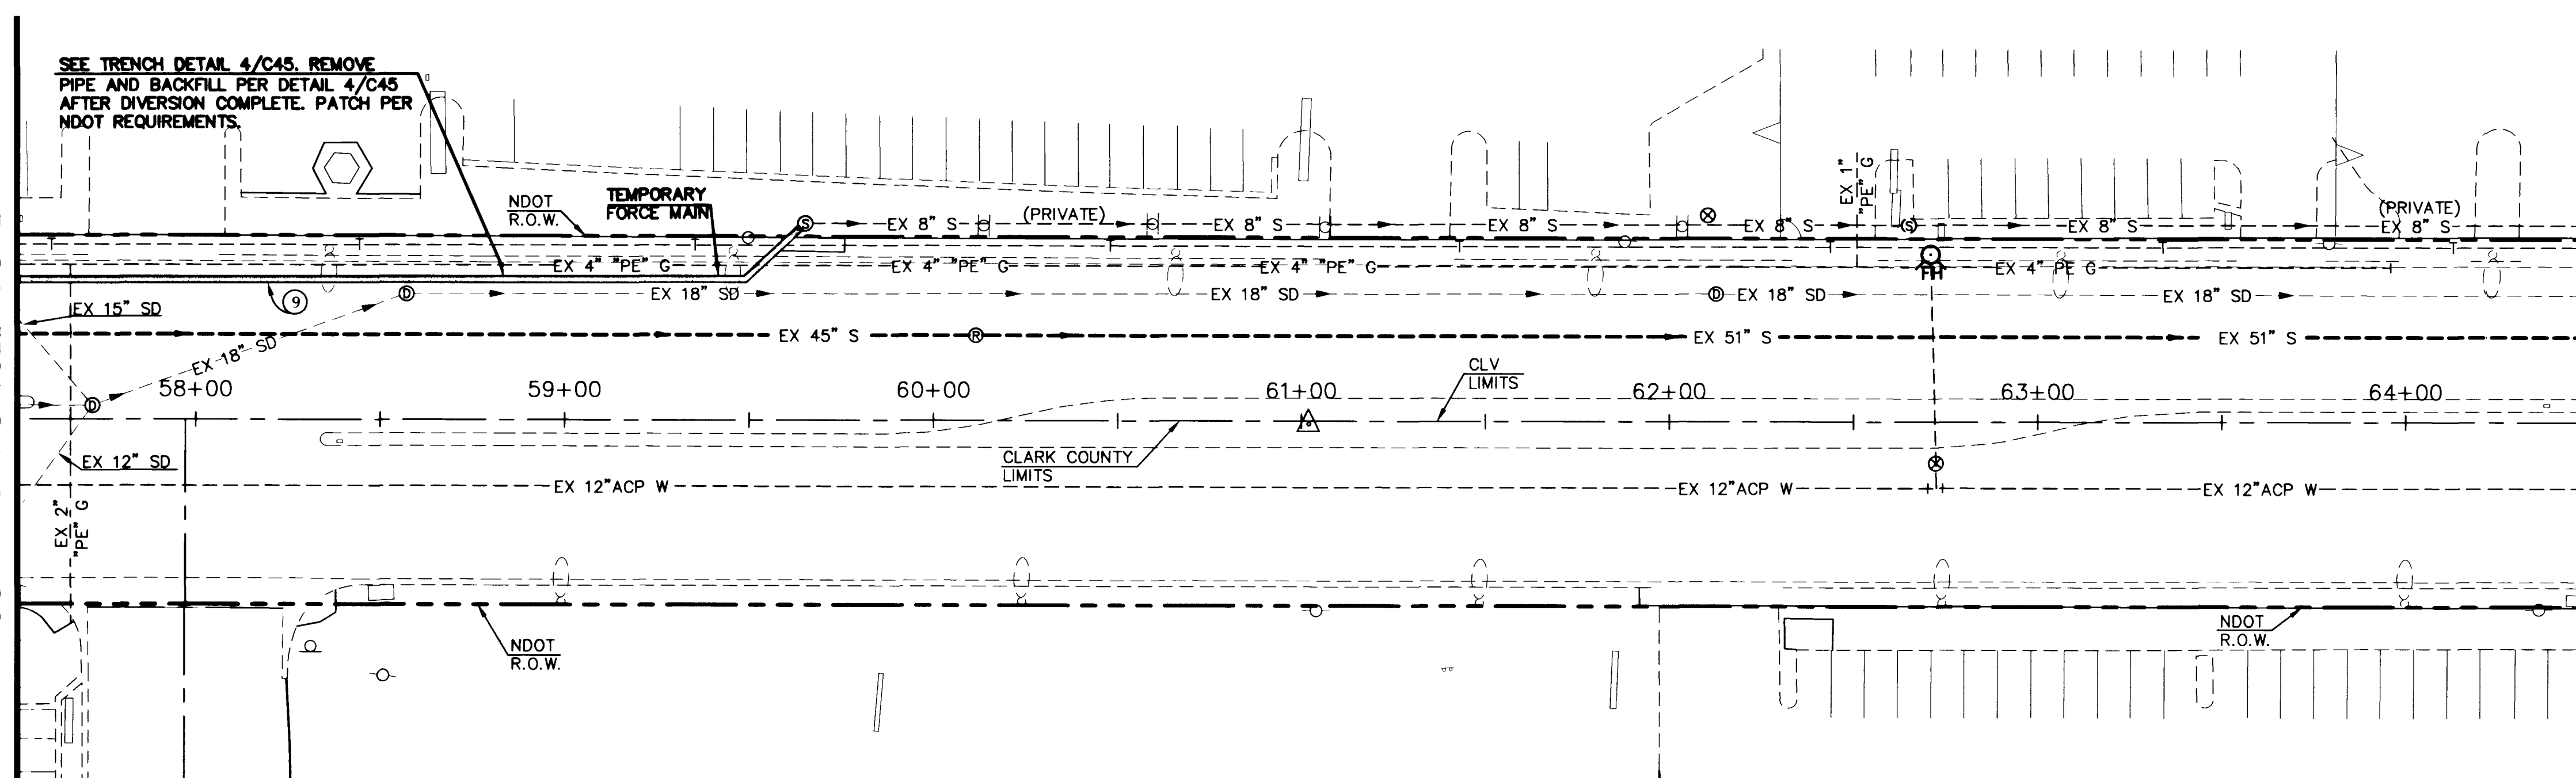

MATCHLINE STA: 64+50.00 FOR
CONTINUATION SEE SHEET C42

NOTE:

WHEN A WATERLINE IS LESS THAN EIGHTEEN (18) INCHES ABOVE A SEWER OR STORM DRAIN LINE OR ANYTIME A WATER LINE IS BELOW A SEWER OR STORM DRAIN LINE THE FOLLOWING PROVISIONS SHALL APPLY:

- 1) A REASONABLE EFFORT MUST BE MADE TO PLACE WATER AND SEWER PIPELINE JOINTS AN EQUAL DISTANCE FROM THE CROSSING POINT. THIS REQUIREMENT DOES NOT APPLY TO WELDED JOINTS.
- 2) A MINIMUM VERTICAL SEPARATION OF SIX (6) INCHES MUST BE MAINTAINED AND STRUCTURAL SUPPORT IN THE FORM OF A CEMENT SLURRY ENCASEMENT WHICH WILL EXTEND UPWARD FROM THE SEWER/STORM DRAIN LINE TO THE SPRINGLINE OF THE WATER LINE.
- 3) THE CROSSING SHALL BE CONSTRUCTED USING ONE OF THE FOLLOWING OPTIONS:
 - A) THE SEWER LINE MUST BE CONSTRUCTED OF WATER SUPPLY QUALITY MATERIALS MEETING AWWA STANDARDS.
 - B) THE SEWER OR WATERLINE SHALL BE TOTALLY ENCASED BY A MINIMUM FOUR (4) INCH THICK, 300 PSI CEMENT SLURRY, A DISTANCE OF TEN FEET ON EACH SIDE OF THE CROSSING MIDPOINT. THIS OPTION IS NOT AVAILABLE FOR ACP.
 - C) THE SEWER OR WATER LINE SHALL BE INSTALLED IN A SLEEVE OF WATER QUALITY PIPE OR STANDARD CASING, WITHOUT JOINTS, TEN FEET ON EACH SIDE.

FEB
67566

CHARLESTON BOULEVARD
(SR-159)

AVOID CUTTING UNDERGROUND UTILITY LINES. IT'S COSTLY.
Call
before you
Dig—
1-800-227-2600
UNDERGROUND SERVICE ALERT (U.S.A.)

AVOID OVERHEAD POWER
LINE CONTACT
Call
before you
OVERHEAD
1-702-593-6111
NEVADA POWER ENVIRONMENT AND
SAFETY (NPEAS) INITIATIVE

MARTIN & MARTIN ASSUMES NO RESPONSIBILITY FOR EXISTING UTILITY LOCATIONS AND ELEVATIONS. THE UTILITIES SHOWN ON THIS DRAWING HAVE BEEN PLOTTED FROM THE BEST AVAILABLE INFORMATION. IT IS, HOWEVER, THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY THE LOCATION AND ELEVATION OF ALL UTILITIES PRIOR TO THE COMMENCEMENT OF ANY CONSTRUCTION. CONTRACTOR SHALL VERIFY ALL EXISTING SITE CONDITIONS PRIOR TO CONSTRUCTION. IF A CONFLICT EXISTS BETWEEN THE SHOWN OR ASSUMED LOCATIONS AND WHAT EXISTS IN THE FIELD, THE CONTRACTOR IS TO NOTIFY THE ARCHITECT/ENGINEER IMMEDIATELY. FOR LYVND FACILITIES, ENGINEER SHALL SUBMIT REVISED DRAWING FOR CONFLICT RESOLUTION.

CHARLESTON BOULEVARD
SEWER REHABILITATION
SANDHILL ROAD TO NELLIS BOULEVARD
REACH 3 & 4 DIVERSION

REACH 3 & 4 DIVERSION