

Stantec Consulting Inc.
 6763 W Charleston Blvd
 Las Vegas NV U.S.A.
 89146-1049
 Tel. 702.258.0115
 Fax. 702.258.4956
 www.stantec.com


- REMOVAL NOTES:**
- 1 AC PAVEMENT
 - 2 SIDEWALK
 - 3 CURB & GUTTER
 - 4 VALLEY GUTTER

- CONSTRUCTION NOTES:**
- 10 MATCH EXISTING
 - 11 SAWCUT
 - 12 ROTOMILL (SEE NOTE 2)
 - 13 3" AC PAVEMENT OVERLAY
 - 14 2" AC PAVEMENT REPLACEMENT
 - 15 3/4" OPEN GRADE
 - 16 L TYPE CURB & GUTTER PER USD NO. 216
 - 17 TYPE III SIDEWALK RAMP PER USD NO. 235
 - 18 TACK-ON MEDIAN CURB PER USD NO. 221
 - 19 SIDEWALK PER USD NO. 234
 - 20 ADJUST MANHOLE WITH COLLAR PER USD NO. 408
 - 21 ADJUST WATER VALVE BOX TO FINISHED GRADE PER UDACS PLATE 8. VALVE SHALL BE ACCESSIBLE AT ALL TIMES.
 - 21A ADJUST BLOW-OFF VALVE BOX PER UDACS PLATE 4
 - 22 RE-ESTABLISH SURVEY MARKER
 - 42 P30 PULLBOX

- NOTES:**
1. ALL GEOMETRY ON MEDIAN CURBS IS TO FACE OF CURB.
 2. ROTOMILL QUANTITY EXCLUDES TRENCH AND PAVEMENT REPLACEMENT.
 3. CENTERLINE GRADE SHOWN IS SURFACE OF OPEN GRADE SEE SECTION B
R1
 4. SEE SHEET R-8 FOR ALEXANDER ROAD - RAINBOW BOULEVARD GRADING PLAN.
 5. SEE SHEETS U-1 THRU U-6 FOR UTILITY PLANS.
 6. SEE SHEETS T-1 THRU T-2 FOR STRIPING PLANS.

- 3" AC PAVEMENT
- 2" AC PAVEMENT

Myron R. Wells
 LVWVD DATE 4/14/03

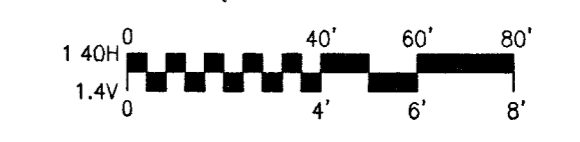


Avoid overhead power line contact. It's costly. Avoid cutting underground utility lines. It's costly.

Call before you OVERHEAD 1-702-593-6111
Call before you Dig 1-800-227-2600

NO.	DATE	DESCRIPTION

DEPARTMENT OF PUBLIC WORKS
 ENGINEERING DESIGN SECTION
 CITY ENGINEER: CHARLES KAJKOWSKI JR., P.E.
 DESIGNED BY: JLD/DO
 DRAWN BY: DD
 CHECKED BY: MW
 HORIZONTAL SCALE: 1" = 40'
 VERTICAL SCALE: 1" = 4'
 DATE: 06/11/02

ALEXANDER ROAD
 US 95 TO RANCHO DRIVE
 ROADWAY PLAN + PROFILE
 STA. 99+00 TO STA. 109+00

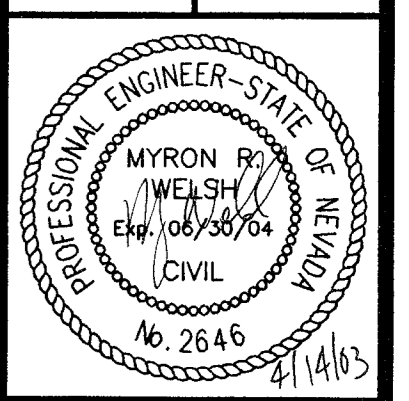

Sheet
R-3
 11 of 35
 DRAWING NO.
 107-V3634