

CURVE DATA ① INDICATES CURVE NUMBER

CURVE	DELTA	RADIUS	LENGTH	TANGENT
1	1120.27	330.00	65.32	32.77
2	0836.37	270.00	40.57	20.33
3	0749.33	1532.00	209.22	104.79
4	0348.19	240.33	15.98	7.98
5	1120.27	330.00	65.32	32.77
6	0836.37	270.00	40.57	20.33
7	0749.33	1532.00	209.22	104.79
8	0348.19	240.33	15.98	7.98
9	1120.27	330.00	65.32	32.77
10	0836.37	270.00	40.57	20.33
11	0749.33	1532.00	209.22	104.79
12	0348.19	240.33	15.98	7.98
13	1120.27	330.00	65.32	32.77
14	0836.37	270.00	40.57	20.33
15	0749.33	1532.00	209.22	104.79
16	0348.19	240.33	15.98	7.98
17	1120.27	330.00	65.32	32.77
18	0836.37	270.00	40.57	20.33
19	0749.33	1532.00	209.22	104.79
20	0348.19	240.33	15.98	7.98
21	1120.27	330.00	65.32	32.77
22	0836.37	270.00	40.57	20.33
23	0749.33	1532.00	209.22	104.79
24	0348.19	240.33	15.98	7.98
25	1120.27	330.00	65.32	32.77

NOTE: CURVE DATA REPRESENTS PARTIAL CURVE, THIS SHEET ONLY.

- CONSTRUCTION NOTES**
- IMPROVEMENTS**
- ① INSTALL A.C. PAVEMENT PER STREET SECTIONS, SEE SHEET 32
 - ② INSTALL "L" TYPE CURB & GUTTER (S-47)
 - ③ INSTALL "A" TYPE ISLAND CURB (S-50)
 - ④ ADJUST EXISTING WATER FACILITY TO GRADE


- WATER**
- ⑩ INSTALL CAP W/ 2" BLOW-OFF ASSEMBLY
 - ⑪ INSTALL FIRE HYDRANT ASSEMBLY (U-33)
 - ⑫ INSTALL 12" GATE VALVE & BOX (S-34)

- STREET LIGHTING**
- ⑬ STREET LIGHT OR COMMON TRENCH, SEE ELECTRICAL PLAN
 - ⑭ SINGLE STREET LIGHT, SEE ELECTRICAL PLAN (E-2)
 - ⑮ DOUBLE STREET LIGHT, SEE ELECTRICAL PLAN (E-2)

- IRRIGATION**
- ⑯ BANK "A"; 1-6" & 2-4" SDR35 PVC



- NOTE TO CONTRACTOR:**
- ALL EXISTING UTILITY CROSSINGS MUST BE VERIFIED PRIOR TO CONSTRUCTION OF ANY MAIN LINES OR LATERALS THAT MAY BE ADVERSELY EFFECTED. ANY DISCREPANCIES IN LOCATION AND/OR ELEVATION MUST BE PROVIDED TO THE ENGINEER FOR ACCEPTANCE PRIOR TO CONSTRUCTION.
 - TOPOGRAPHY SHOWN HEREIN REFLECTS ORIGINAL EXISTING TOPOGRAPHY. ACTUAL FIELD CONDITIONS INCLUDE SITE ROUGH GRADING.
 - ALL COMMON LOTS AS SHOWN HEREIN TO BE PRIVATELY MAINTAINED BY THE H.O.A.
 - ALL WATER LINE GATE VALVES, SERVICE GATE VALVES, AND FIRE HYDRANT GATE VALVES ARE TO BE CONSTRUCTED UNDER A.C. PAVEMENT. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THAT ALL WATER VALVES CANS DO NOT CREATE CONFLICTS WITH THE PROPOSED CURB LINE PRIOR TO PLACEMENT OF CONCRETE. ALL WATER FACILITIES SHOWN IN THESE DRAWINGS HAVE BEEN "SCALED-UP" FOR CLARITY ONLY.

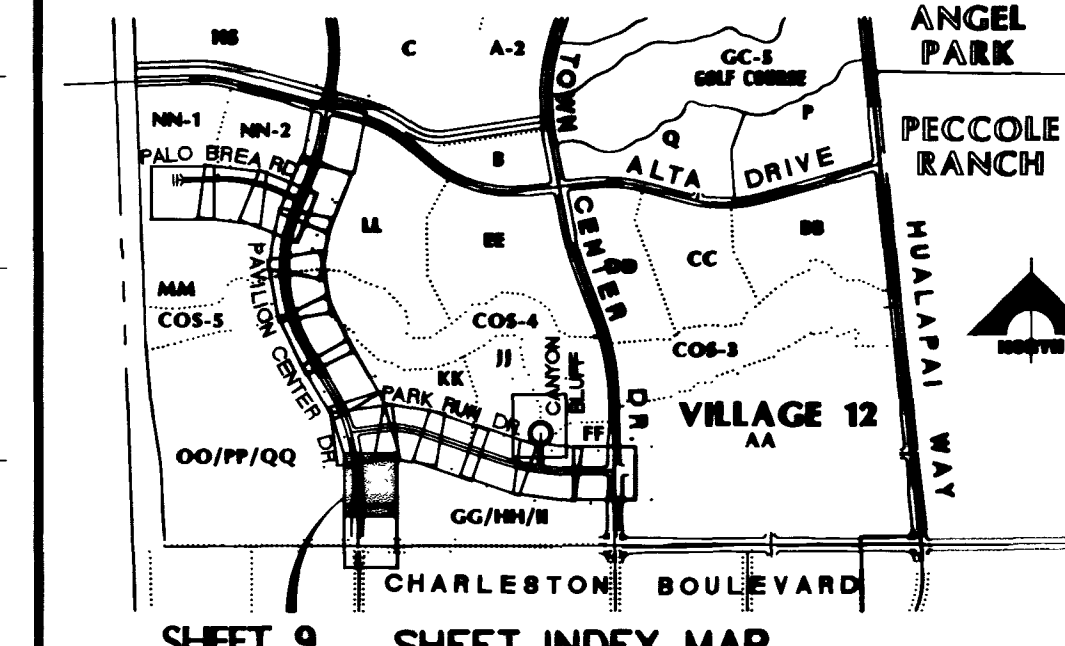

APPROVAL: *[Signature]* 2-28-97
 LAS VEGAS VALLEY WATER DISTRICT DATE

C:\DWG\12\UNIT-2C\1\PROVA\1240099.FR: Feb. 14 15:02:39 1997 BY 01

100% SUBMITTAL 02-28-97
 RECOMMENDED
 BEST PRACTICES
 10259
 P.E. NO. DATE REV. DATE DESCRIPTION
 G. C. WALLACE, INC.
 Engineering/Architecture
 1555 SOUTH RAINBOW BLVD., LAS VEGAS, NEVADA 89102 (702) 363-1200
 SUMMERLIN DIVISION (702) 363-0991
 STATE OF NEVADA PROFESSIONAL ENGINEERING BOARD
 LICENSE NO. 44741
 G. C. WALLACE
 ENGINEER
 VILLAGE 12 UNIT 2C IMPROVEMENTS
 PAVILION CENTER DRIVE
 PLAN & PROFILE
 STA 103+50 TO 108+00
 SHEET 9 OF 41
 JOB NO. 0201214

11-31-49 107Y-4463-2C

