QUANTITY ESTIMATES - ONSITE (PRIVATE)

ITEM #	DESCRIPTION	UNIT	QUANTITY	PRIVATE
1	2" ASPHALTIC CONCRETE PAVING	$2.90 SY	5351 SY	$15,517.90
2	3" ASPHALTIC CONCRETE PAVING	$4.35 SY	565 SY	$2,457.75
5	TYPE I GRAVEL BASE	$7.60 CY	986 CY	$7,493.60
6	TYPE II GRAVEL BASE	$7.60 CY	657 CY	$4,993.20
7	EXCAVATION AND EMBANKMENT	$2.40 CY	32000 CY	$76,800.00
8	CURB AND GUTTER (30" ROLL)	$4.15 LF	1831 LF	$7,598.65
10	VALLEY GUTTER	$3.35 SF	1345 SF	$4,505.75
11	SIDEWALK (5")	$1.85 SF	6880 SF	$12,728.00
12	STREETLIGHT (STANDARD BASE)	$1710.00	19 EA	$32,490.00
15	SIDEWALK UNDERDRAIN	$715 EA	1 EA	$715.00
17	HANDICAP RAMP	$250 EA	10 EA	$2,500.00
19	4" SEWER	$9.50 LF	1622 LF	$15,409.00
20	MISC. TRENCHING (CONDUIT)	$5.00 LF	2815 LF	$14,075.00
23	PULLBOX	$100 EA	4 EA	$400.00
24	STREET / STOP SIGNS	$100 EA	14 EA	$1,400.00
27	SERVICE POINT	$200 EA	1 EA	$200.00

QUANTITY ESTIMATES - PUBLIC

ITEM #	DESCRIPTION	UNIT	QUANTITY	PUBLIC
1	4' TYPE 'A' DROP INLET	$2700 EA	3 EA	$8,100.00
2	60" STORM DRAIN MANHOLES	$855 EA	1 EA	$855.00
3	CURB AND GUTTER	$4.15 LF	1650 LF	$6,847.50
4	CROSS GUTTER	$3.35 SF	730 SF	$2,445.50
16	SIDEWALK 4"	$1.45 SF	8250 SF	$12,020.25
17	HANDICAP RAMP	$250 EA	3 EA	$750.00
19	SIDEWALK UNDERDRAIN	$715 EA	1 EA	$715.00
20	TYPE I GRAVEL BASE	$7.60 CY	1975 CY	$15,010.00
21	TYPE II GRAVEL BASE	$7.60 CY	869 CY	$6,604.40
22	4" ASPHALTIC CONCRETE PAVING	$6.85 SY	2607 SY	$17,857.95
23	PULLBOX	$100 EA	6 EA	$600.00
26	STREETLIGHT	$1710 EA	8 EA	$13,680.00
30	STREET / STOP SIGNS	$100 EA	7 EA	$700.00
31	MISC. TRENCHING (CONDUIT)	$5.00 LF	1219 LF	$6,095.00
38	PAVEMENT MARKINGS	$3.50 SF	750 SF	$2,625.00
31	POWER TO LOTS	$475 EA	70 EA	$33,250.00
36	WATER TO LOTS	$235 EA	70 EA	$16,450.00
28	SERVICE POINT	$200 EA	1 EA	$200.00
13	8" SEWER	$14.25 LF	2798 LF	$39,871.50
40	SEWER MANHOLES UNDER 6 FEET	$855 EA	13 EA	$11,115.00
41	SEWER MANHOLES OVER 6 FEET	$1710 EA	1 EA	$1,710.00
42	8" WATER MAIN	$14.25 LF	1479 LF	$21,075.75
43	18" STORM DRAIN	$53.00 LF	155 LF	$8,215.00
44	12" WATER MAIN	$55.00 LF	384 LF	$21,120.00
45	10" WATER MAIN	$50.00 LF	917 LF	$45,850.00
46	FIRE HYDRANT	$1710 EA	4 EA	$6,840.00
47	TELEPHONE TO LOTS	$250 EA	68 EA	$17,000.00
48	OFFSITE 18" SEWER	$30.00 LF	724 LF	$21,720.00
49	OFFSITE 8" SEWER	$14.25 LF	734 LF	$10,459.50
50	OFFSITE SEWER MANHOLE OVER 6'	$1710 EA	3 EA	$5,130.00
51	OFFSITE 18" STORM DRAIN	$30.00 LF	1,623 LF	$48,690.00

Avoid cutting underground utility lines. It's costly.
Call before you Dig. 1-800-227-2600 UNDERGROUND SERVICE ALERT (USA)

SAFETY ALERT
Call before you Overhead
323-3111
OVERHEAD SERVICE ALERT

Pulte Homes
An American Favorite

Carter : Burgess
2365 East Sunset Road, Suite 105
Consultants in Planning, Engineering, Architecture, Las Vegas, NV 89120
Construction Management, and Related Services (702) 798-1007 Fax (702) 798-7056

REV	DATE	BY	REVISION

QUANTITY AND SCHEDULE SHEET

PULTE HOMES
EAGLE CREEK ESTATES
UNIT 1

DRAWN BY: DL
DESIGNED BY: GB
CHECKED BY: RT
PROJECT NO: 98052010
SCALE: N/A
HORIZ. N/A
VERT.

PROFESSIONAL ENGINEER - STATE OF NEVADA
RANDALL J. CARR
CIVIL
No. 9655

SHEET C4
4 OF 17 SHEETS
DRAWING NO. 1074-4571-1

L:\98V032\DESIGN\8052QNTY.DWG CITY OF LAS VEGAS
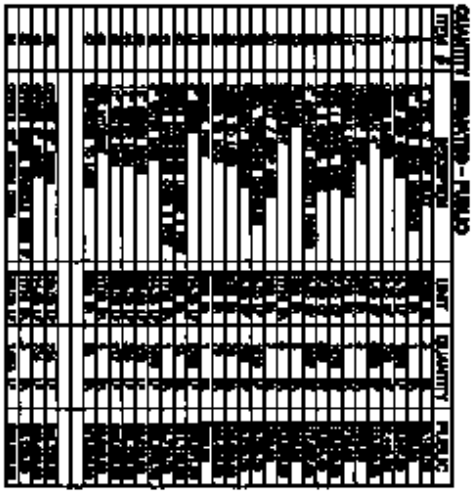
L:\98V052\DESIGN\PH1\8052qnty.dwg Tue Oct 06 07:58:37 1998 DL