

NOTES:

1. ALL CONTROL VALVES, QUICK COUPLERS AND OTHER APPARATUS SHALL BE INSTALLED IN LANDSCAPE VERGE AREAS AND IN CONCRETE VALVE BOXES ADJACENT TO SIDEWALK AREAS.
2. ALL SLEEVES UNDER ROADWAYS AND EXISTING DRIVEWAYS WERE INSTALLED UNDER CONTRACT 1 AND SHALL BE CONSIDERED BY OTHERS FOR THE PURPOSES OF THIS CONTRACT. SLEEVE LOCATIONS DEPICTED ON PLAN DRAWINGS ARE REPRESENTATIONAL ONLY. CONTRACTOR SHALL FIELD LOCATE ALL SLEEVES AND MAKE ANY NECESSARY PIPING ADJUSTMENTS. ADDITIONALLY, CONTRACTOR SHALL BE RESPONSIBLE FOR INSTALLATION OF SLEEVES UNDER ANY NEW HARDSCAPE UNDER THIS CONTRACT. (REF. SLEEVING SIZE DETAIL, SHT IR - 10)

**LEGEND**


- RAINBIRD XBT-10 OR XBT-20
- RAIN BIRD CONTROL VALVE 100-PEB (AS PER DETAIL)
- RAIN BIRD CONTROL VALVE 150-PEB (AS PER DETAIL)
- 2" GATE VALVE
- 2" SCH. 40 PVC MAIN SET IN 4" SCH. 40 PVC SLEEVE
- 6" SCH. 40 PVC LATERAL PIPING (SIZES AS SHOWN)
- EXISTING IRRIGATION SLEEVE (UNDER ROADWAYS AND DRIVEWAYS) INSTALLED AS PART OF CONTRACT 1.
- NEW IRRIGATION SLEEVE (UNDER NEW HARDSCAPE) INSTALLED AS PART OF THIS CONTRACT.
- RAIN BIRD QUICK COUPLER VALVE (44NP)
- RAIN BIRD CLUSTER CONTROL UNIT \*CCU-J-PH-TW-66
- RAIN BIRD SATELLITE CONTROLLER PAR 16-TW-66
- EXISTING/NEW WATER METER (REFER TO PLANS)
- 2" BACKFLOW PREVENTION ASSEMBLY (CLA-VAL RP-4, CONBRACO 40-208-A2, OR EQUAL)

MATCHLINE  
SEE SHEET IR-1

MATCHLINE  
SEE SHEET IR-3

Avoid cutting underground utility lines. It's costly.  
**Call before you Dig.**  
1-800-227-2600  
UNDERGROUND SERVICE ALERT (USA)

NO.	REVISIONS	DATE	BY

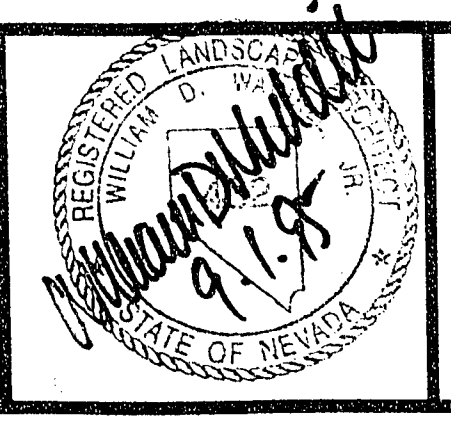

**Kimley-Horn and Associates, Inc.**  
Las Vegas, Nevada © 1994

DESIGNED BY URG  
DRAWN BY DD/WSW  
CHECKED BY BW  
NOTE BOOK NO.



DOWNTOWN CORRIDOR IMPROVEMENTS  
CITY OF LAS VEGAS DEPT. OF PUBLIC WORKS  
LAS VEGAS, NEVADA  
CONTRACT 3 - 4TH STREET  
CHARLESTON BLVD. TO STEWART AVE.

DATE 9/1/95  
SCALE 1"=20'

IRRIGATION PLAN  
STA. 55+84 TO STA. 62+34

DWG. NO. 107-V-2288A  
FILE NO. 9903.02  
IR-2  
SHEET 22 OF 49

22-0-01