

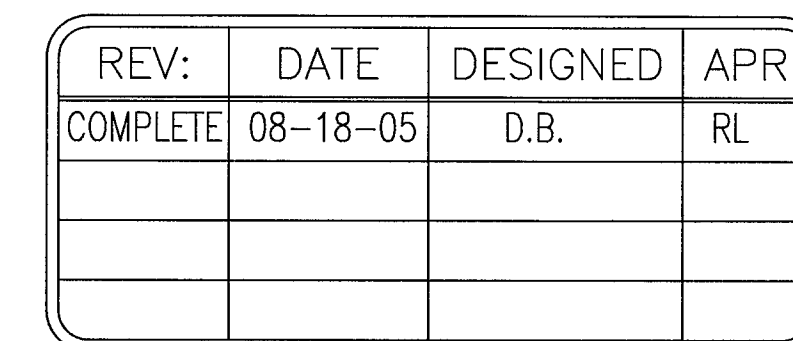
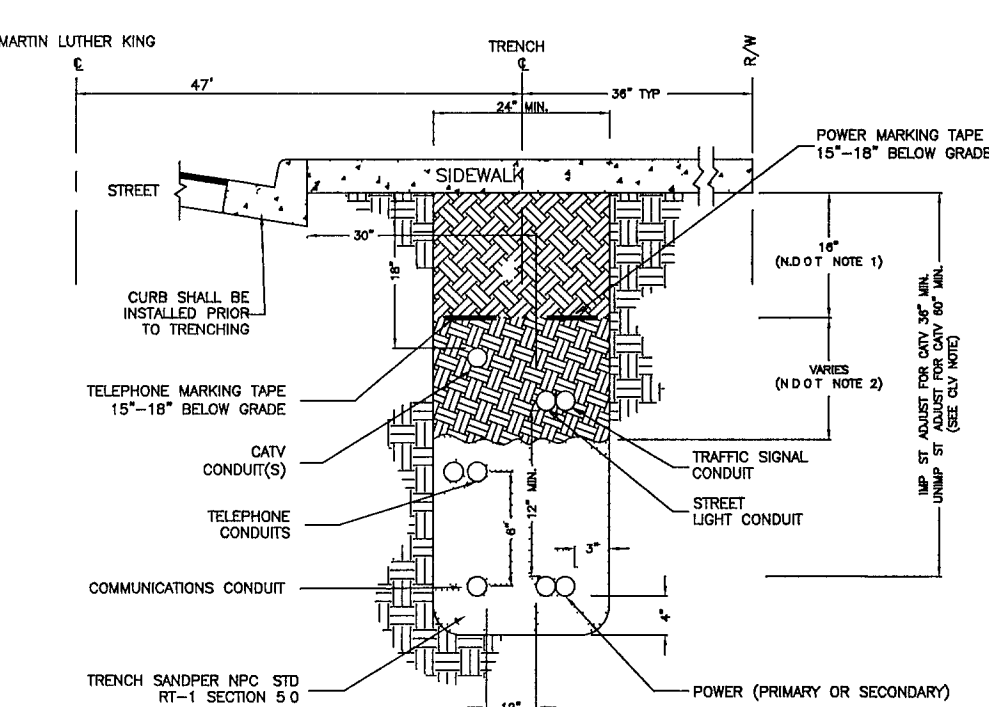
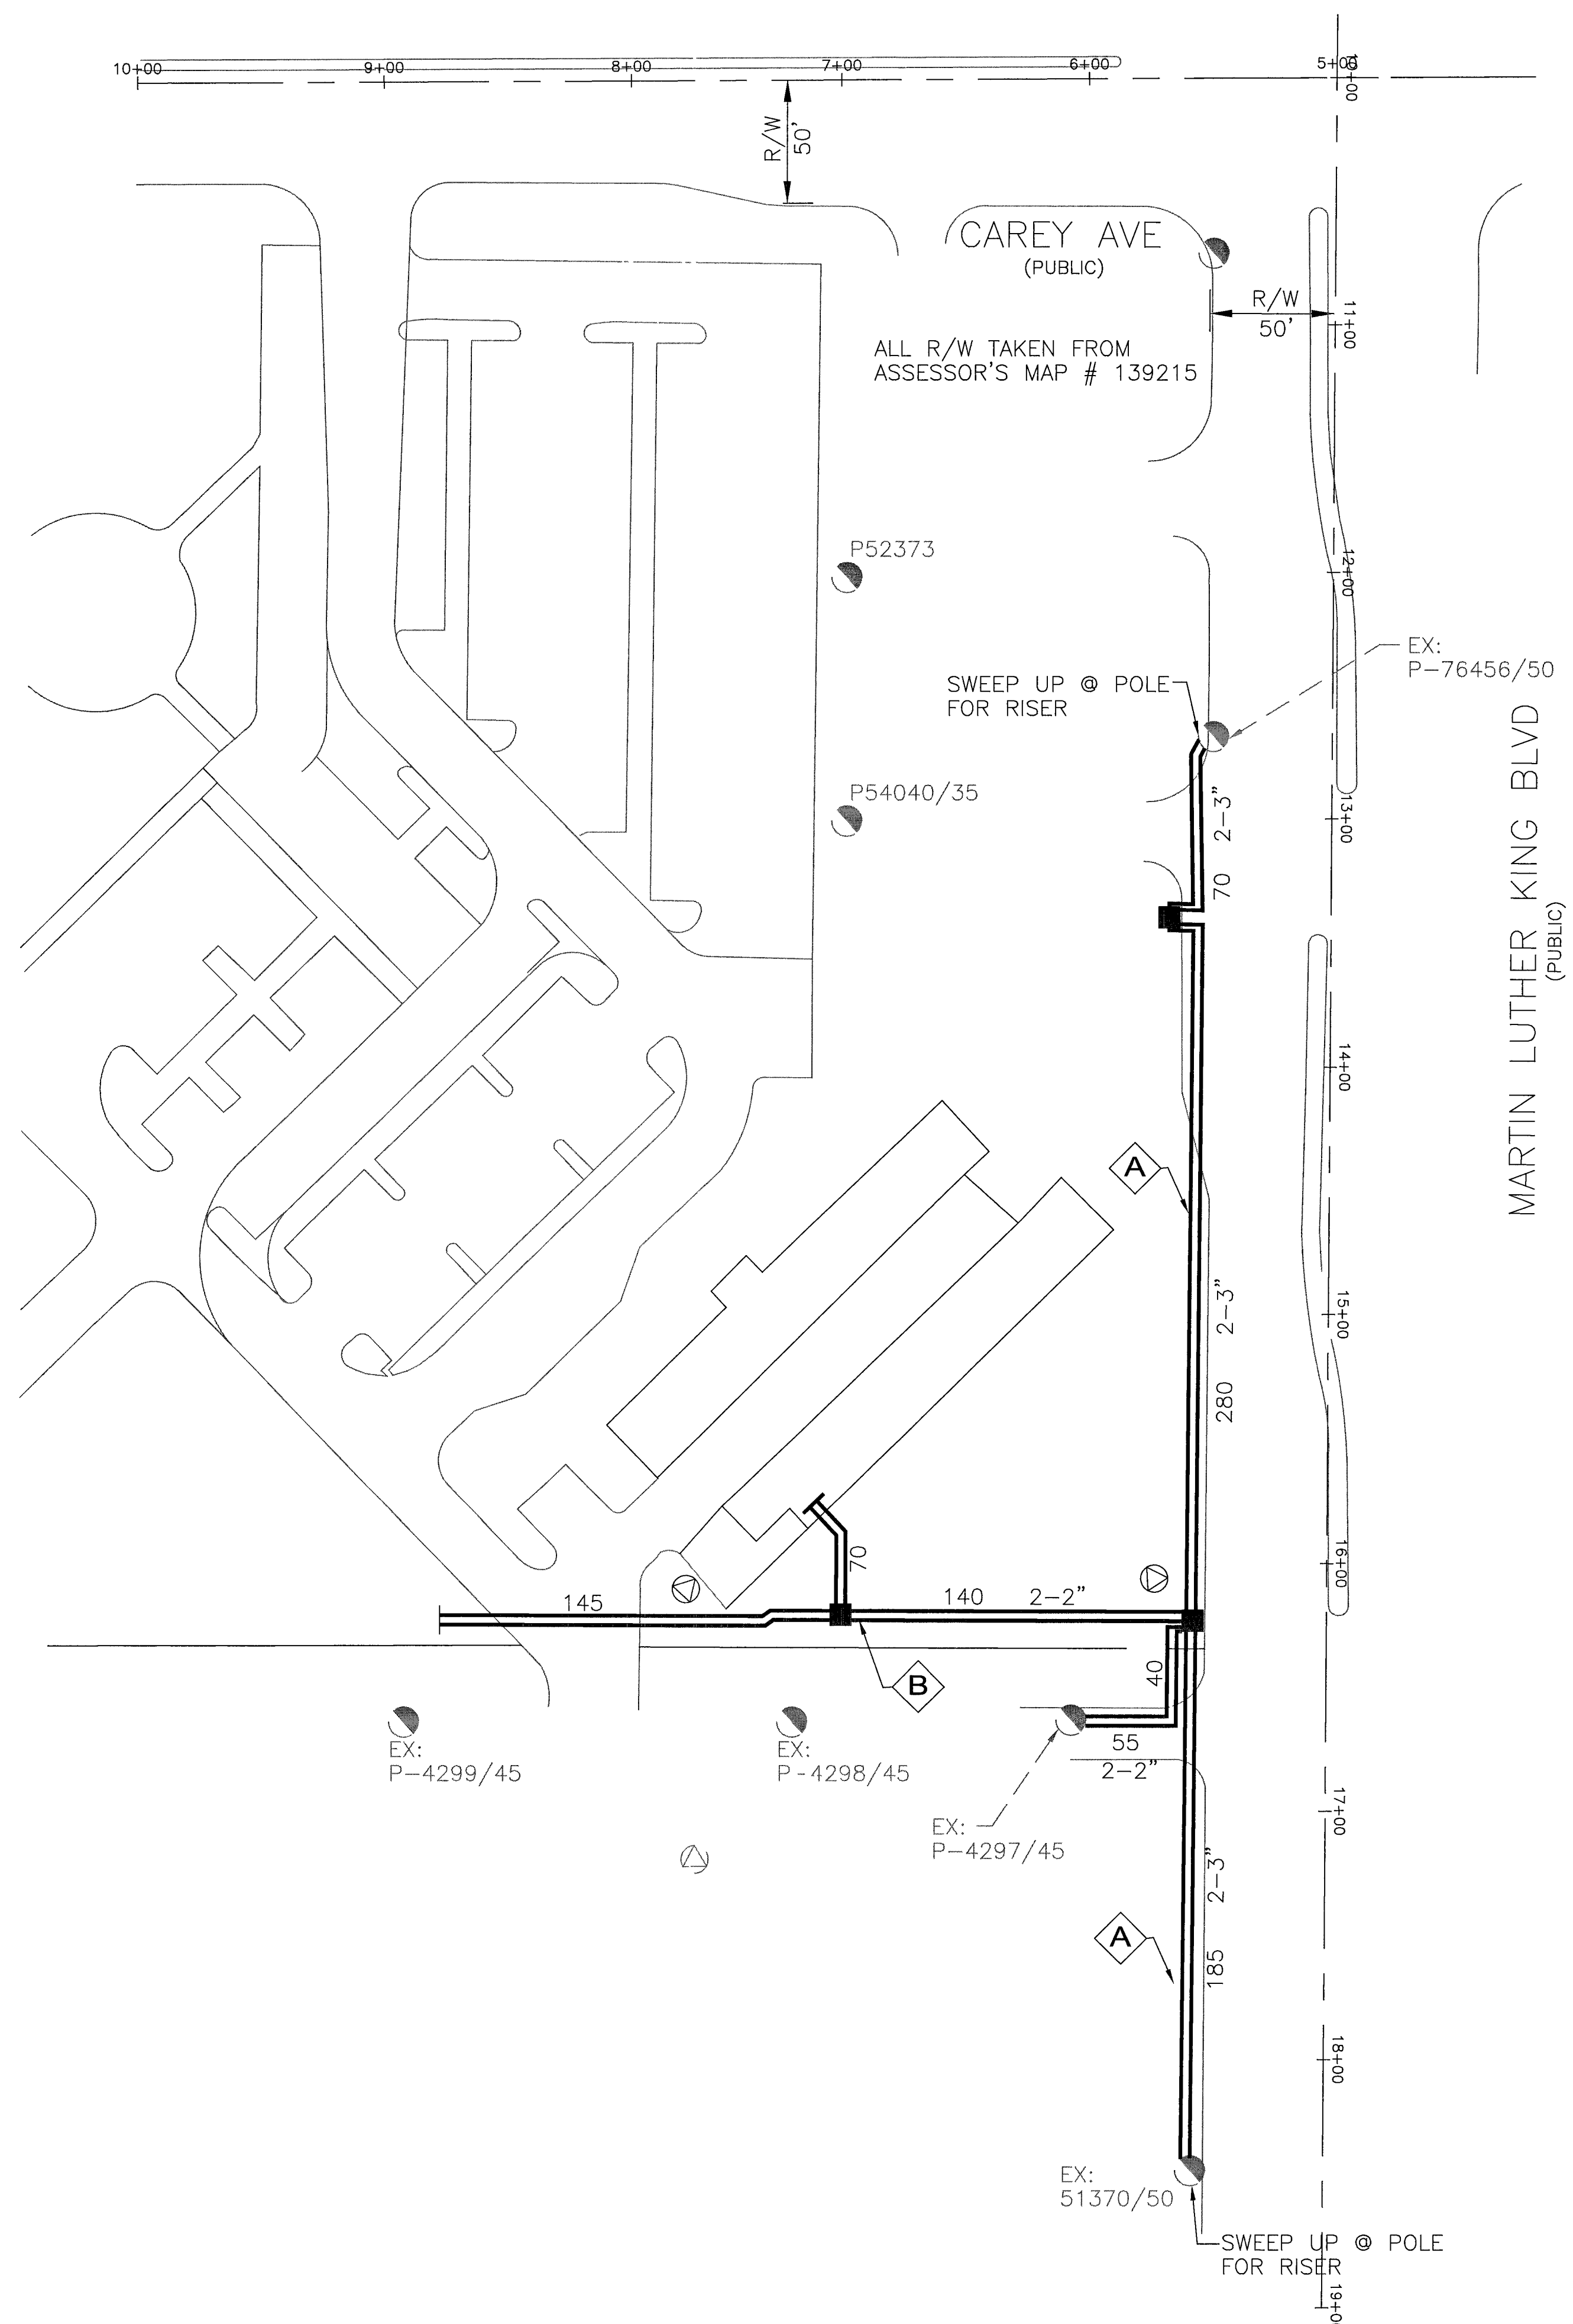


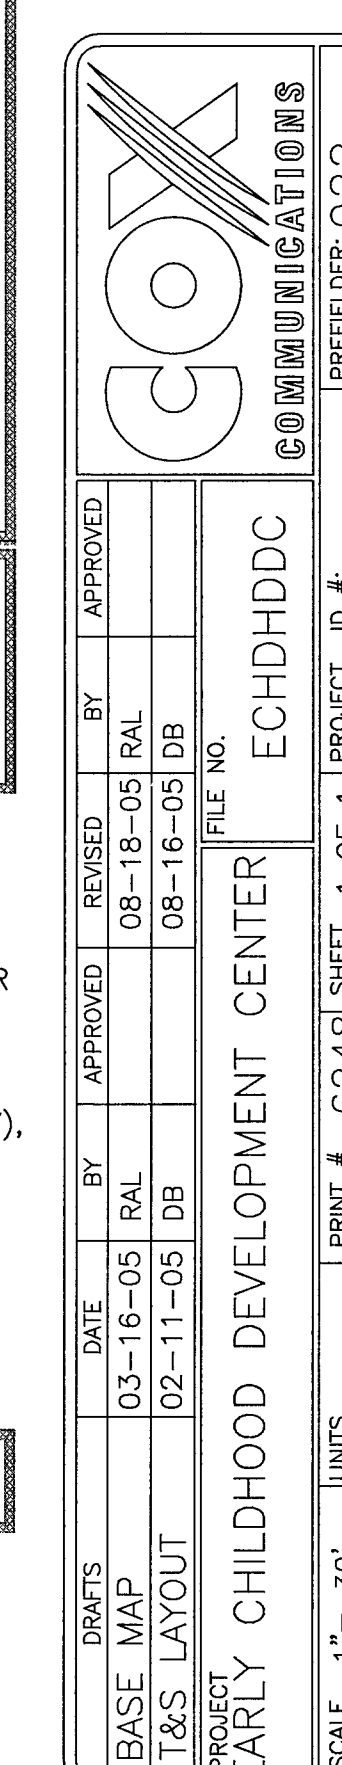

CITY OF LAS VEGAS
CLARK COUNTY
HENDERSON
NORTH LAS VEGAS

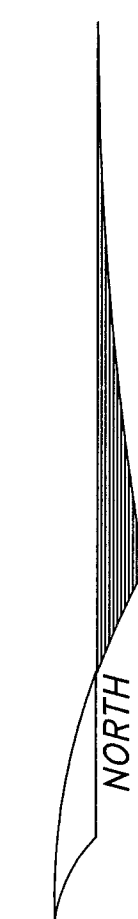

A SIDEWALK TRENCH DETAIL

NOO REQUIREMENTS (APPLICABLE WITHIN IMPROVED AREA ONLY)

BASE AGGREGATE (AS PER NDOT SPECIFICATIONS, SECTION 704) A MINIMUM OF 16 INCHES TO BE LAY IN MAXIMUM 8 INCH LOOSE LAYS 90% COMPACTION REQUIRED

DRAINAGE COLLECT (AS PER NDOT SPECIFICATIONS, BASE AGGREGATE (AS PER NDOT SPECIFICATIONS SECTION 207) 90% COMPACTION REQUIRED

CLV REQUIREMENTS (APPLICABLE WITHIN CITY OF LAS VEGAS LIMITS ONLY)

IMPROVED AREA (IMP STD.) (LOCATION OF TRENCH)

IMP. STD. WILL BE CONSIDERED IMPROVED IF IT MEETS ONE OR MORE OF THE FOLLOWING CRITERIA

- EXISTING PERMANENT PAVEMENT WITH CURBS & GUTTER AND/OR ADJACENT IMPROVED SIDEWALK
- WITHIN AN IMPROVED TRAIL AREA.
- WITHIN A CONSTRUCTION ZONE IN CONJUNCTION WITH A PRIVATE OR PUBLIC PROJECT

UNIMPROVED AREA (UNIMP STD.) (LOCATION OF TRENCH)


ANY OTHER SCENARIO THAT FAILS TO MEET THE IMPROVED AREA CRITERIA(A) WILL BE CONSIDERED AN UNIMPROVED AREA

NEC REQUIREMENTS

FOR ALL OTHER SITUATIONS REFER TO NDOT STANDARDS

SMOFTLY REQUIREMENTS PER NDOT SPECIFICATIONS

TRENCH DEPTH REQUIREMENTS NDOT SPD RT-5

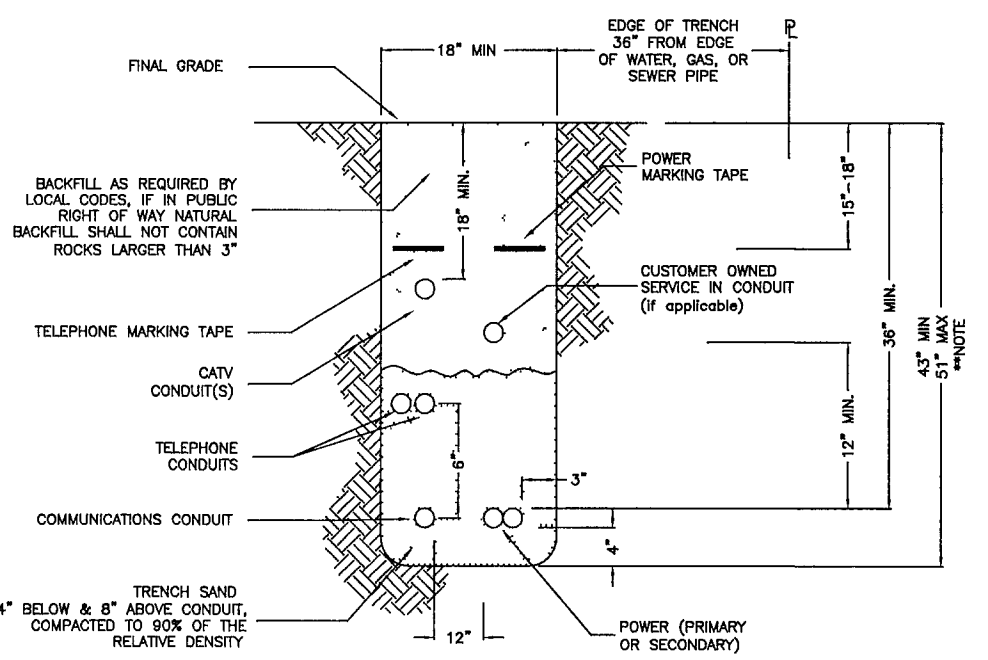

TRENCH DETAIL

LEGEND	
■	PROPOSED VAULT 22 1/4" x 35 1/4" x 12" MARKED "CABLE TV" (B-36)
▣	PROPOSED VAULT 21 3/4" x 23 1/4" x 12" MARKED "CABLE TV" (B-24)
●	PROPOSED VAULT 15 3/4" x 25 1/4" x 12" MARKED "CABLE TV" (N-16)
○	PROPOSED MEDIUM LOCKBOX
○	PROPOSED LARGE LOCKBOX
---	PROPOSED ONE INCH (1") PVC CONDUIT
---	PROPOSED TWO INCH (2") PVC CONDUIT
	UNLESS NOTED OTHERWISE
900	PROPOSED PREWIRE BOX BN-900 TV
1020	PROPOSED PREWIRE BOX BN-1020 TV
	1 STUB AND CAP BEYOND IMPROVEMENT LIMITS
▣	EXISTING VAULT 22 1/4" x 35 1/4" x 12" MARKED "CABLE TV" (B-36)
▣	EXISTING VAULT 21 3/4" x 23 1/4" x 12" MARKED "CABLE TV" (B-24)
●	EXISTING VAULT 15 3/4" x 25 1/4" x 12" MARKED "CABLE TV" (N-16)
○	EXISTING TWO INCH (2") PVC CONDUIT
○	EXISTING TELCO MANHOLE
□	EXISTING 3' x 5' x 4' TELCO PULL BOX
□	EXISTING 2'-6" x 4' x 3' TELCO PULL BOX
□	EXISTING 17" x 30" x 29 1/2" TELCO UTILITY BOX
□	EXISTING 9 5/8" x 16" x 24" TELCO SERVICE BOX
○	EXISTING TELCO POLE
×	EXISTING POWER COMPANY POLE
○	EXISTING JOINT POLE
⊗	EXISTING JOINT POLE WITH A POWER TRANSFORMER
⊗	EXISTING OR PROPOSED POWER TRANSFORMER
▣	EXISTING OR PROPOSED CATV PEDESTAL 1730
▣	EXISTING OR PROPOSED CATV PEDESTAL 1230
⊕	RISER POLE/QUADRANT DETAIL
⊕	RISER OWNERSHIP NOTED (C) CATV (T) TELCO
⋈	INSTALL EIGHT FOOT (8') GROUND ROD
CATV CONTACT: TERRY SOVEY	
PHONE: (702) 384-8084 EXT.8334	
CELLULAR:	
(702) 892-4057	
BEEPER:	
DRAWING CONTACT: Rik van Gessel	
PHONE: (702) 384-8084 EXT.1120	

NOTE:
WORK PERFORMED SHALL COMPLY WITH
THE FOLLOWING (AS APPLICABLE):

- a. THE REGULATIONS AND CRITERIA AS SET FORTH BY THE UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, OFF-SITE IMPROVEMENTS, AND THE UNIFORM STANDARD DRAWINGS FOR PUBLIC WORKS CONSTRUCTION.
- b. ALL APPLICABLE LOCAL (CITIES AND/OR COUNTY) STATE BUILDING CODES AND ORDINANCES.

510' LINEAR FOOTAGE
1 NO. OF VAULTS
GOVERNMENT APPROVAL DATE 6/27/06

NOTE: All trench common W/ SPRINT Telephone &/or Nevada Power Co. Unless noted: "TV only trench"

	REFERENCES DETAIL LETTER SEE COORELATED DETAILS
	FUTURE PEDESTAL LOCATION
	TIE TO 2" STUBS & EXTEND
	IN FUTURE SIDEWALK

City of Las Vegas
PERMIT REQUIRED

93273

107V4517-COX