

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26

BILL NO. 2018-33

ORDINANCE NO. 6638

AN ORDINANCE TO ADOPT THE 2018 EDITION OF THE UNIFORM PLUMBING CODE, TOGETHER WITH AMENDMENTS THERETO, AND TO PROVIDE FOR OTHER RELATED MATTERS.

Proposed by: Scott D. Adams, City Manager

Summary: Adopts the 2018 Edition of the Uniform Plumbing Code, together with amendments thereto.

THE CITY COUNCIL OF THE CITY OF LAS VEGAS DOES HEREBY ORDAIN AS FOLLOWS:

SECTION 1: Title 16, Chapter 28, Section 10, of the Municipal Code of the City of Las Vegas, Nevada, 1983 Edition, is hereby amended to read as follows:

16.28.010: Those certain documents, copies of each being on file in the Office of the City Clerk, and designated as follows, are adopted by reference and made a part of this Code, to the same effect as if set out herein in full:

(A) Uniform Plumbing Code, [2012] 2018 Edition, including its Standards and Appendices, except as otherwise indicated, designated as Part 1 of this Chapter; and

(B) A document entitled "Southern Nevada Amendments to the [2012] 2018 Uniform Plumbing Code," adding to, deleting from and amending the Uniform Plumbing Code, [2012] 2018 Edition, designated as Part 2 of this Chapter.

SECTION 2: The document entitled "Southern Nevada Amendments to the 2018 Uniform Plumbing Code" is attached hereto.

SECTION 3: Ordinance No. 6355, the "Uniform Plumbing Code, 2012 Edition," and the "Southern Nevada Amendments to the 2012 Uniform Plumbing Code," as amended, are hereby repealed in their entirety.

SECTION 4: This Ordinance shall be effective as of February 4, 2019.

SECTION 5: If any section, subsection, subdivision, paragraph, sentence, clause or phrase in this ordinance or any part thereof is for any reason held to be unconstitutional or invalid or ineffective by

1 any court of competent jurisdiction, such decision shall not affect the validity or effectiveness of the
2 remaining portions of this ordinance or any part thereof. The City Council of the City of Las Vegas hereby
3 declares that it would have passed each section, subsection, subdivision, paragraph, sentence, clause or phrase
4 thereof irrespective of the fact that any one or more sections, subsections, subdivisions, paragraphs,
5 sentences, clauses or phrases be declared unconstitutional, invalid or ineffective.

6 SECTION 6: Whenever in this ordinance any act is prohibited or is made or declared to
7 be unlawful or an offense or a misdemeanor, or whenever in this ordinance the doing of any act is required
8 or the failure to do any act is made or declared to be unlawful or an offense or a misdemeanor, the doing of
9 such prohibited act or the failure to do any such required act shall constitute a misdemeanor and upon
10 conviction thereof, shall be punished by a fine of not more than \$1,000.00 or by imprisonment for a term of
11 not more than six months, or by any combination of such fine and imprisonment. Any day of any violation
12 of this ordinance shall constitute a separate offense.


13 SECTION 7: All ordinances or parts of ordinances or sections, subsections, phrases,
14 sentences, clauses or paragraphs contained in the Municipal Code of the City of Las Vegas, Nevada, 1983
15 Edition, in conflict herewith are hereby repealed.

16 PASSED, ADOPTED and APPROVED this 15th day of August, 2018.


17 APPROVED:

18 By 
19 CAROLYN G. GOODMAN, Mayor

20 ATTEST:

21 
22 LUANN D. HOLMES, MMC
City Clerk

23 APPROVED AS TO FORM:

24  7-9-18
25 Val Steed, Date
Deputy City Attorney


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26

The above and foregoing ordinance was first proposed and read by title to the City Council on the 18th day of July, 2018, and referred to a committee for recommendation; hereafter the committee reported favorably on said ordinance on the 15th day of August, 2018, which as a regular meeting of said Council; that at said regular meeting, the proposed ordinance was read by title to the City Council as first introduced and adopted by the following vote:

VOTING "AYE": Mayor Goodman and Councilmembers, Tarkanian, Anthony, Coffin Fiore, Seroka and Crear
VOTING "NAY": None
EXCUSED: None
ABSTAINED: None

APPROVED:

CAROLYN G. GOODMAN, Mayor

ATTEST:

LUANN D. HOLMES, MMC City Clerk



**SOUTHERN NEVADA
AMENDMENTS**

TO THE

2018 UNIFORM PLUMBING CODE

PREFACE

This document was developed by the Southern Nevada Building Officials' Uniform Plumbing Code Committee and presents recommended amendments to the 2018 Uniform Plumbing Code (UPC) as published by the International Association of Plumbing and Mechanical Officials (IAPMO)

Participation in the 2018 UPC Committee was open to all interested parties. However, voting on amendment proposals was limited to one vote each for six of Southern Nevada municipalities (Clark County, Henderson, Las Vegas, North Las Vegas, Boulder City, and Mesquite), the Clark County School District, and three industry representatives. All committee proceedings were conducted in accordance with Robert's Rules of Order.

The recommended amendments contained herein are not code unless adopted and codified by governmental jurisdictions. These amendments are not intended to prevent the use of any material or method of construction not specifically prescribed herein, provided any alternates have been approved and their use authorized by the Building Official. This document may be copied and used in whole or in part without permission or approval from the organizations listed on the cover page.

Table of Contents

| | |
|---|-----------|
| Chapter 1: Administration..... | 4 |
| Section 101.5 Plumbing License Provision | |
| Section 101.6 Appendices | |
| Section 310.4 Use of vent and waste pipes | |
| Section 411.2 Water Consumption | |
| Section 412.1 Water Consumption..... | 5 |
| Section 418.3 Location of Floor Drains | |
| Section 422.0 Minimum Number of Required Fixtures | |
| Section 507.13 Installation in Residential Garages | |
| Section 508.3.2 Access Type | 6 |
| Section 509.6.1 Termination requirements | |
| Section 603.5.12 Beverage Dispensers..... | 7 |
| Section 603.4.2 Testing | |
| Section 608.5 Discharge Piping | |
| Section 704.3 Commercial Sinks..... | 8 |
| Section 707 Fittings | |
| Section 710.1 Backflow Protection | |
| Section 801.3.2 Walk-in Coolers | |
| Section 801.3.4 Floor Sinks | |
| Section 804.1 Standpipe Receptors | 9 |
| Section 1008.1 General | |
| Section 1009.0 Gravity Grease Interceptors | |
| Section 1010.0 Sand Oil Interceptors..... | 11 |
| Section 1011.0 Maintenance of Interceptors..... | 13 |
| Section 1101.2 Where Required | |
| Section 1101.6 Subsoil Drains..... | 14 |
| Section 1101.10 Filling Stations and Motor Vehicle Washing Establishments | |
| Section 1101.11 Paved Areas | |
| Section 1101.15 Traps on Storm Drains and Leaders | |
| Section 1101.16.2 Combining Storm with Sanitary Drainage | |
| Section 1201.2 General | |
| Section 1210.1.6 Piping Underground beneath Buildings | |
| Section Chapter 13 – Health Care Facilities and Medical Gas and Vacuum Systems | 15 |
| Section Chapter 14 – Firestop Protection | |
| Section Chapter 15 – Alternate water sources for Non-potable Applications | |

Chapter 1: Administration

Delete Chapter 1, with the exception of Sections 101.0, 101.1, 101.2, 101.3 and 101.4, Replace Section 101.5 and add Section 101.6 to read as follows:

Section 101.5

Add new section 101.5, to read as follows:

101.5 Plumbing Licensing Provision. Provision for licensing shall be determined by the Administration Provision of Authority Having Jurisdiction

Section 101.6

Add new section 101.6, to read as follows.

101.6 Appendices The provisions of appendices are adopted, except as noted below

Section Appendix F – Firefighter Breathing Air Replenishment Systems

Section Appendix H – Private Sewage Disposal Systems

Section 310.4 Use of vent and waste pipes

Amend section 310.4 to read as follows

310.4 Use of vent and waste pipes Except as hereinafter provided in Sections 908.0, 909.0 and 910.0, no vent pipe shall be used as a soil or waste pipe, nor shall a soil or waste pipe be used as a vent

Exception: Single stack DWV systems may be used provided they are designed by a Nevada registered Mechanical Engineer and approved by the authority having jurisdiction

Section 411.2 Water Consumption

Delete section 411.2 in its entirety and replace with new section that reads as follows:

411.2 Water Consumption. Water closets, either flush tank, flushometer tank, or flushometer valve operated, shall have an average consumption of 1.6 gallons (6.1 liters) of water per flush. A timing device or other mechanism which will automatically flush a water closet periodically or continually is prohibited

Section 412.1 Water Consumption

Delete section 412.1 in its entirety and replace with a new section that reads as follows.

412.1 Water Consumption Urinals shall have an average water consumption of 1 gallon (3.8 liters) of water per flush. A timing device or other mechanism which will automatically flush a urinal periodically or continually is prohibited.

Section 418.3 Location of Floor Drains

Revise section 418.3, as follows

418.3 Location of Floor Drains. Floor drains shall be installed in following locations:

- (1) Toilet rooms containing two or more water closets or a combination of one water closet and one urinal, except in a dwelling unit.
- (2) Commercial kitchens and in accordance with Section 704.3.
- (3) Laundry rooms in commercial buildings and common laundry facilities in multi-family dwelling buildings.
- (4) Boiler rooms.
- (5) All Fire Pump rooms shall be provided with a (3) inch (76 mm) minimum floor drain which must be connected to an approved trap primer.

Section 422.0 Minimum Number of Required Fixtures

Delete sections 422.1 through 422.5 and Table 422.1 in their entirety and replace with new section 422.1, to read as follows:

422.1 Fixture Count. Plumbing fixtures shall be provided for the type of occupancy and in the minimum number as required by the currently adopted Building Code.

Section 507.13 Installation in Residential Garages

Revise section 507.13 to read as follows

507.13 Installation in Residential Garages. Appliances in residential garages and in adjacent spaces that open to the garage and are not part of the living space of a dwelling unit shall be installed so that all burners, elements, thermostats and burner-ignition devices are located not less than 18 inches (457mm) above the floor unless listed as flammable vapor ignition resistant (NFPA 54-9.1.10.1).

Section 508.3.2 Access Type

Add additional paragraph to Section 508.3.2

508.3.2 Access Type The inside means of access shall be a permanent or fold away inside stairway or ladder, terminating in an enclosure, scuttle, or trap door. Such scuttles or trap doors shall have a rough framed opening not less than 22 inches by 24 inches (559 mm by 610 mm) shall open easily and safely under all conditions, especially snow, and shall be constructed so as to permit access from the roof side unless deliberately locked on the inside.

At least 6 feet (1829 mm) of clearance shall be available between the access opening and the edge of the roof or similar hazard, or rigidly fixed rails or guards a minimum of 42 inches (1067 mm) in height shall be provided on the exposed side. Where parapets or other building structures are utilized in lieu of guards or rails, they shall be a minimum of 42 inches (1067 mm) in height [NFPA 54 9.4.3]

The Exterior Means of Access shall comply with the following

- (1) Side railings shall extend not less than 30 inches (762 mm) above the roof or parapet wall.
- (2) Landings shall not exceed 18 feet (5486 mm) apart measured from the finished grade
- (3) Width shall be not less than 14 inches (356 mm) on center
- (4) Rungs spacing shall not exceed 12 inches (305 mm) on center, and each rung shall be capable of supporting a 300 pound (136.1 kg) load
- (5) Toe space shall be not less than 6 inches (152 mm).

Exceptions:

- 1 Permanent exterior ladders providing roof access need not extend closer than eight (8) feet (2438 mm) to the finish grade.
- 2 A portable ladder may be used for access for a Group R Division 3 and 4 and U occupancies.
- 3 Permanent ladders for equipment access need not be provided at parapets or walls less than thirty (30) inches (762mm) in height

Section 509.6.1 Termination requirements

Add an exception to Subsection 509.6.1 (1), to read as follows:

509.6.1 Termination Requirements. A gas vent shall terminate in accordance with one of the following:

- (1) Gas vents that are 12 inches (300 mm) or less in size and located not less than 8 feet (2438 mm) from a vertical wall or similar obstruction shall terminate above the roof in accordance with Figure 509.6.1 and Table 509.6.1

Exception: A single-family residence having gas vents twelve (12) inches (300 mm) in size or smaller with listed caps shall be permitted to be terminated in accordance

with Figure 509.6 1, provided they are at least four (4) feet (1.2 m) from a vertical wall or similar obstruction.

Items (2) through (7) remain unchanged

Section 603.5.12 Beverage Dispensers

Revise section 603.5.12, as follows:

603.5.12 Beverage Dispensers. Potable water supply to beverage dispensers, carbonated beverage dispensers, or coffee machines shall be protected by a listed reduced pressure principle backflow preventer as approved by the authority having jurisdiction. For carbonated beverage dispensers, piping material installed downstream of the backflow preventer shall not be affected by carbon dioxide gas.

Section 603.4.2 Testing

Revise section 603.4.2, as follows:

603.4.2 Testing The premise owner or responsible person shall have the backflow prevention assembly tested by a certified backflow assembly tester at the time of installation, repair, or relocation and not less than on an annual schedule thereafter, or more often when required by the Authority Having Jurisdiction. The certified tester shall leave a copy of their backflow certification on site along with a copy of the certification of each device tested. The periodic testing shall be performed in accordance with the procedures referenced in ASSE Series 5000 by a tester qualified in accordance with those standards.

Section 608.5 Discharge Piping

Revise section 608.5, adding item (8) to read as follows:

608.5 Discharge Piping. The discharge piping serving a temperature relief valve, pressure relief valve, or combination of both shall have no valves, obstructions, or means of isolation and be provided with the following:

Items (1) through (7) remain unchanged

(8) For relief valves located inside a building, provide a drain of galvanized steel, hard-drawn copper piping and fittings, CPVC, PP or flexible corrugated connectors complying with 604.0 or listed relief valve drain tube with fittings that will not reduce the internal bore of the pipe or tubing (straight lengths as opposed to coils) and shall extend from the valve to the outside of the building or to an approved location. Temperature and Pressure Relief (T&P) drains shall discharge to the exterior of the building unless the manufacturer's listing prevents this termination. T&P drains may discharge through an air gap into a secondary clothes washer port, or through an air gap in a floor sink, floor mounted mop sink or a floor drain equipped with a listed funnel, provided they are installed in accordance with section 804.1.

Section 704.3 Commercial Sinks

Revise section 704.3, as follows:

704.3 Commercial Sinks. Pot sinks, scullery sinks, dishwashing sinks, silverware sinks, commercial dishwashing machines, and other similar fixtures shall drain indirectly to the drainage systems by means of an air gap.

Section 707.10 Fittings

Revise section 707.10, to read as follows:

707.10 Fittings Cleanout fittings shall be not less in size than those given in Table 707 1.

Exception: Where a 2-1/2" (inch) cleanout is required, a 2" (inch) cleanout may be used for horizontal branch waste lines.

Section 710.1 Backflow Protection

Delete section 710.1, add new section 710.1 to read as follows:

710.1 Backflow Protection. Drainage Piping serving fixtures which have flood level rims located below the elevation of the next upstream manhole cover of the public or private sewer serving such drainage piping shall be protected from backflow of sewage by installing an approved type backwater valve Other than a single dwelling unit served by an individual sewer, fixtures above such elevation shall not discharge through the backwater valve

Section 801.3.2 Walk-in Coolers

Revise section 801.3.2, to read as follows:

801.3.2 Walk-in Coolers For walk-in coolers, floor drains shall be permitted to be connected to a separate drainage line discharging into an outside receptor. The flood-level rim of the receptor shall be not less than six inches (152 mm) lower than the lowest floor drain Such floor drains shall be trapped and individually vented Cleanouts shall be provided at ninety 90 degree (1 57 rad) turns and shall be accessibly located Such waste shall discharge through an airgap into a trapped and vented receptor, except that full-size airgap is required where the indirect waste pipe is under vacuum

Section 801.3.4 Floor Sinks

Add a new section 801 3 4 to read as follows

801.3.4 Floor Sinks. Floor sinks shall be installed flush with the finished floor and shall be accessible for cleaning

Section 804.1 Standpipe Receptors

Revise Section 804.1 by adding a new second paragraph, to read as follows:

Indirect waste piping other than the discharge from the clothes washer may be terminated into a listed clothes washer box. The second port, on a multiport box shall be permanently connected to the vertical receptor standpipe via a wye branch fitting.

Section 1008.1 General

Revise section 1008.1, to read as follows

1008.1 General. Where building traps are to be installed, each building trap shall be provided with a clean-out and with a relieving vent or fresh-air intake on the inlet side and outlet side of the trap, which shall be at least one-half the diameter of the drain to which it connects. Such relieving vent or fresh-air intake shall be carried above grade and terminate in a screened outlet located outside the building.

Section 1009.0 Gravity Grease Interceptors

Delete sections 1009.0 through 1017.2, retain Table 1014.3.6, and add new sections 1009.0, through 1013.0, to read as follows:

1009.0 - Gravity Grease Interceptors

1009.1 General. A grease interceptor shall be provided for proper handling of liquid wastes containing grease. A grease interceptor as described in these standards shall be installed in any business establishment with kitchen facilities including restaurants, cafes, lunch counters, cafeterias, supermarkets, convenience stores, bakeries, bars and clubs, hotels, hospitals, sanitariums, factory or school kitchens, or any other commercial establishment where grease may be introduced into the sewer system.

Special consideration shall be given to every fish, fowl and animal slaughterhouse or establishment, every fish, fowl and meat packing or curing establishment, every soap factory, tallow rendering, fat rendering and hide curing establishment, or any other establishment from which considerable amounts of grease are likely to be discharged into the sewer system. Written application describing exact operation and anticipated volumes of grease shall be made to the Sanitation Authority Having Jurisdiction to determine the standards for such systems.

1009.2 Fixtures The waste discharge from fixtures and equipment which may contain grease from the businesses set out previously shall be drained through a grease interceptor or grease interceptors. Fixtures such as, but not limited to, the following are included: scullery sinks, pot and pan sinks, dishwashing machines, soup kettles and similar cooking equipment, trash compactors, floor drains in grease generating areas, and trash can wash areas.

1009.3 Prohibited fixtures The waste lines from toilets, urinals, and other similar fixtures shall not drain through a grease interceptor.

1009.4 Location

- (1) Grease interceptors shall be so installed and connected that they shall be at all times easily accessible for inspection, cleaning and removal of the intercepted grease.
- (2) Grease interceptors shall be placed as close as practical to the fixtures served
- (3) Grease interceptors shall be located on the exterior of buildings unless specifically approved otherwise in writing by the health district.
- (4) Grease interceptors shall be so located as to be accessible for service without the use of ladders or the removal of bulky equipment
- (5) Location of all grease interceptors shall be shown on the approved plans.
- (6) Each grease interceptor shall serve only one business establishment. Multiple business connections to a single interceptor are not permitted, unless approved by the sanitation authority in writing
- (7) An accessible hose bib shall be located within 25 feet (7620 mm) of every grease interceptor

1009.5 Size

- (1) Grease interceptors shall be sized in accordance with Table 1014.3.6. Interceptors shall not be more than one size larger than required in Table 1014.3.6.
Exception: For situations not covered by Table 1014.3.6, a submittal showing the interceptor size and calculations shall be approved by the sanitation authority prior to building official plan approval. Such designs shall be prepared by a Nevada Registered Engineer
- (2) All grease interceptors shall have a minimum of two compartments with a minimum of 3 inch (76.2 mm) diameter fittings designed for grease retention. The fittings shall be installed in the following manner: A sanitary tee shall be installed at the inlet, a sanitary tee on the inlet side of the interceptor baffle, and a sanitary tee installed at the outlet
- (3) There shall be adequate access for cleaning all areas of the separator. A minimum of one access point into each compartment within the separator shall be provided. In addition, no access points shall be further apart than 10 feet (3048 mm) regardless of the number of compartments. Separator covers shall be of gas-tight construction. Interceptor covers shall have a minimum opening dimension of twenty (20) inches (508 mm) in diameter.
- (4) All waste shall enter the grease interceptor through the inlet pipe
- (5) Grease interceptors shall be so designed that they will not become air bound. Each interceptor shall be properly vented with a relief vent located on the outlet side of the interceptor
- (6) Cleanouts shall be installed in the drainage piping inlet and outlet side of each grease interceptor and the outlet side of each sample box
- (7) Each fixture discharging into a grease interceptor shall be individually trapped and vented in an approved manner

- (8) Each grease interceptor shall have an approved water seal of not less than two (2) inches (50.8 mm) in depth or the diameter of its outlet whichever is greater.
- (9) When grease interceptors are located in areas of pedestrian or vehicle travel, the design of the interceptor shall be adequate to support the imposed load. Structural calculations to verify its adequacy may be required.
- (10) A sample box shall be provided on the outlet side of each grease interceptor downstream of the required cleanout and vent.

1009.6 Water Test. A water test shall be applied to the level of the top of the interceptor inlet opening through the outlet opening or discharge side of the sample box. Interceptors shall show no leakage from section seams, pinholes or other imperfections. Any leakage below this level is cause for rejection.

- (1) **Backfill** Interceptors shall not be backfilled until the inspection has been made to verify there are no leaks.

1010.0 Sand/Oil Interceptors.

1010.1 Where Required. An interceptor shall be provided for the proper handling of liquid wastes containing oil (of petroleum origin), sand, inert solids or any other similar substances.

NOTE A sand/oil interceptor is not intended for the disposal of hazardous waste or as a backup system for accidental spills.

Interceptors as described in these standards shall be installed in, but not limited to, the following locations: car washes, motor vehicle, boat or airplane storage yards, gasoline and diesel service stations, repair garages or any other similar facility which may introduce sand and oil into the sewer system.

Submission of a written application describing the exact facility operation and the types and anticipated volumes of waste to be generated may be required by the building official.

Where provided, drains installed in enclosed parking garages and repair garages shall drain through an approved sand/oil interceptor.

1010.2 Fixtures The waste discharge from fixtures and equipment which may contain sand, oil-based wastes, and inert solids shall drain only through an interceptor. This requirement includes, but is not limited to, the following: floor drains, floor sinks, special processing equipment, trench drains, and area drains.

1010.3 Prohibited Fixtures The waste line from toilets, urinals, lavatories and other similar fixtures, which discharge domestic wastes only, shall not drain through the interceptor.

1010.4 Location.

- (1) Sand/oil interceptors shall be so installed and connected that they shall be at all times accessible for inspection, cleaning and removal of the intercepted waste.
- (2) Sand/oil interceptors shall be placed as close as practical to the fixtures served.

- (3) Sand/ oil interceptors shall be located on the exterior of buildings unless specifically approved otherwise in writing by the sanitation authority
- (4) Sand/ oil interceptors shall be located as to be accessible for service without the use of ladders or the removal of bulky equipment
- (5) Location of all sand/oil interceptors shall be shown on the approved plans.
- (6) Each sand/ oil interceptor shall serve only one business establishment Multiple business connections to a single sand/ oil interceptor are not permitted unless approved by the sanitation authority in writing

1010.5 Size and Design

- (1) All sand/oil interceptors shall be a minimum of three hundred (300) gallons (40 cubic feet) (1136 l) of total liquid capacity with a minimum floating liquid capacity of 55 gallons (208 l)
- (2) All sand/oil interceptors shall have a minimum of two compartments with a minimum of 3 inch (76.2 mm) diameter fittings designed for retention. The fittings shall be installed in the following manner a 90° long sweep shall be installed at the interceptor inlet, a sanitary tee shall be installed on the inlet side of the interceptor baffle, and a sanitary tee installed at the outlet.
- (3) There shall be adequate access for cleaning all areas of the separator. A minimum of one (1) access point into each compartment within the separator shall be provided. In addition, no access points shall be further apart than ten (10) feet (3048 mm) regardless of number of compartments Access covers shall have a minimum opening dimension of twenty (20) inches (508 mm) in diameter Separator covers shall be of gas-tight construction
- (4) The sand/oil interceptor shall be properly vented and designed to prevent it from becoming air bound in accordance with this code.
- (5) Each business establishment for which a sand/oil interceptor is required shall be provided with an interceptor which shall serve that establishment only and no others Separate owners or lessees within a large business or establishment shall require separate interceptors
- (6) Each sand/oil interceptor shall have a water seal of not less than six (6) inches (152 mm).
- (7) When separators are located in areas of foot or vehicle traffic, the design of the separator shall be adequate for the imposed load. Structural calculations performed by a Nevada Registered Engineer to verify adequacy may be required
- (8) Any private or public wash rack or slab used for cleaning machinery or machine parts, shall drain to a sand/oil separator, and shall be adequately protected against storm or surface water intrusion.
- (9) Design standards other than those listed above may be acceptable Redwood baffles shall not be used for new or existing interceptors. Any alternate design shall be prepared by a Nevada Registered Engineer and submitted for review and approval by the sanitation authority and the building official.

- (10) Cleanouts shall be installed in the drainage piping inlet and outlet side of each sand/oil interceptor and the outlet side of each sample box.
- (11) A sample box shall be provided on the outlet side of the interceptor down stream of the required cleanout and vent.

1010.6 Water Test A water test shall be applied to the level of the top of the interceptor inlet opening through the outlet opening or discharge side of the sample box. Interceptors shall show no leakage from section seams, pinholes or other imperfections. Any leakage below this level is cause for rejection.

- (1) **Backfill.** Interceptors shall not be backfilled until the inspection has been made to verify there are no leaks

1011.0 Maintenance of Interceptors

1011.1 Grease and sand/oil interceptors shall be maintained in efficient operating condition by periodic removal of the accumulated grease or sand/oil. No such collected grease, sand/oil, or any material collected from the interceptor shall be introduced into any drainage piping, public or private sewers. The materials removed from interceptors shall be handled and disposed of in a proper manner in accordance with published health district and sanitation authority requirements. Illegal dumping of waste into the sewer shall not be allowed.

1011.2 Maintenance records for each installed interceptor shall be maintained on the premises at all times and presented to a duly authorized agent of the sanitation authority upon request.

1011.3 The Authority Having Jurisdiction shall have the authority to mandate the installation of additional equipment or devices and enforce a maintenance program.

1012.0 Abandoned interceptors. Abandoned interceptors shall be cleaned and filled as required by Section 722.0 of the Plumbing Code for abandoned sewers and sewage disposal facilities.

1013.0 Existing Buildings. Whenever an existing building has a change in use which requires an interceptor or whenever there is an increase in the total number of drainage fixture units served by an existing interceptor, one or more interceptors shall be installed in the drainage system serving the building meeting the requirements of Section 1009 and 1010.

Section 1101.2 Where Required

Revise section 1101.2, to read as follows,

Section 1101.2 Where Required. Roofs, paved areas, yards, courts, courtyards, vent shafts, light wells, or similar areas having rainwater, shall be drained into a separate storm sewer system, or to some other place of disposal satisfactory to the Authority Having Jurisdiction. In the case of one- and two-family dwellings, storm water shall be permitted to be discharged on flat areas, such as streets or lawns, so long as the storm water shall flow away from the building and away from adjoining property, and shall not create a nuisance.

Exception: For townhouses and two-family dwellings, as defined in the International Residential Code, storm water may be discharged onto an adjoining property that is maintained by a common interest community as stipulated in the Covenants, Conditions and Restrictions (CC&Rs) approved by the Authority Having Jurisdiction.

Section 1101.6 Subsoil Drains

Revise section 1101.6 to read as follows:

1101.6 Subsoil Drains Where required by the geotechnical engineer or the authority having jurisdiction, subsoil drains shall be provided around the perimeter of buildings having basements, cellars, or crawl spaces or floors below grade. Such subsoil drains shall be permitted to be positioned inside or outside of the footing, shall be of perforated, or open-jointed approved drain tile or pipe not less than three (3) inches (80 mm) in diameter, and shall be laid in gravel, slag, crushed rock, approved three-quarter (3/4) inch (19.1 mm) crushed recycled glass aggregate, or other approved porous material with not less than (4) inches (102 mm) surrounding the pipe. Filter media shall be provided for exterior subsoil piping.

Section 1101.10 Filling Stations and Motor Vehicle Washing Establishments

Delete section 1101.10 in its entirety.

Section 1101.11 Paved Areas

Delete section 1101.11 in its entirety.

Section 1101.15 Traps on Storm Drains and Leaders

Delete section 1101.15 in its entirety.

Section 1101.16.2 Combining Storm with Sanitary Drainage

Delete section 1101.16.2 in its entirety.

Section 1201.2 Dry Gas

Add a new section 1201.2, to read as follows:

1201.2 Dry Gas. Southern Nevada shall be considered a dry gas condition having a moisture and hydrocarbon dew point below any normal temperature to which the gas piping is in an exposed area, unless specified by the local gas purveyor.

Section 1210.1.6 Piping Underground Beneath Buildings

Delete section 1210.1.6 and replace its entirety, to read as follows:

1210.1.6 Piping Underground Beneath Buildings. No gas piping shall be installed in or on the ground under any building or structure unless installed in gastight conduit, and all exposed gas piping shall be kept at least six (6) inches (152 mm) above grade or structure. The term "building or structure" shall include structures such as porches and steps, whether covered or uncovered, breezeways, roofed porte-cocheres, roofed patios, carports, covered walks, covered driveways,

and similar structures or appurtenances All gas piping under a slab shall be capable of being removed and replaced

The conduit shall be of material approved for installation underground beneath buildings and not less than Schedule 40 pipe The interior diameter of the conduit shall be not less than one-half (1/2) inch (15 mm) larger than the outside diameter of the gas piping

The conduit shall extend to a point at least (12) inches (305 mm) beyond any area where it is required to be installed or to the outside wall of a building, and the outer ends shall not be sealed Where the conduit terminates within a building, it shall be readily accessible and the space between the conduit and the gas piping shall be sealed to prevent leakage of gas into the building

Exception: Products listed for such use.

Section Chapter 13 – Health Care Facilities and Medical Gas and Vacuum Systems

Delete Chapter 13 in its entirety

Section Chapter 14 – Firestop Protection

Delete Chapter 14 in its entirety

Section Chapter 15 – Alternate water sources for Non-potable Applications

Delete Sections 1501 through 1505, and revise 1501 to read as follows,

1501.0 Reclaimed (Recycled) Water Systems The provisions of sections 1501 0 and 1506 0 of this chapter shall not be allowed in residential buildings and shall apply to the installation, construction, alteration, and repair of reclaimed water systems intended to supply uses such as water closets urinals, trap primers for floor drains, floor sinks, irrigation, industrial processes, water features and other uses approved by the Authority Having Jurisdiction Potable water supplied as makeup water in these systems shall be protected against back-pressure and back-syphonage in accordance with Sections 602 0 and 603 0

(Section 1502 is intentionally left blank)

(Section 1503 is intentionally left blank)

(Section 1504 is intentionally left blank)

(Section 1505 is intentionally left blank)

AFFIDAVIT OF PUBLICATION

STATE OF NEVADA)
COUNTY OF CLARK) SS

RECEIVED
CITY CLERK

LV CITY CLERK
495 S MAIN ST
LAS VEGAS NV 89101

Account # 22515
Ad Number 0000995916

2018 JUL 24 P 12: 06

Leslie McCormick, being 1st duly sworn, deposes and says That she is the Legal Clerk for the Las Vegas Review-Journal and the Las Vegas Sun, daily newspapers regularly issued, published and circulated in the City of Las Vegas, County of Clark, State of Nevada, and that the advertisement, a true copy attached for, was continuously published in said Las Vegas Review-Journal and / or Las Vegas Sun in 1 edition(s) of said newspaper issued from 07/19/2018 to 07/19/2018, on the following days:


07 / 19 / 18

BILL NO. 2018-33
AN ORDINANCE TO ADOPT THE 2018 EDITION OF THE UNIFORM PLUMBING CODE, TOGETHER WITH AMENDMENTS THERETO, AND TO PROVIDE FOR OTHER RELATED MATTERS
Proposed by: Scott D. Adams, City Manager
Summary: Adopts the 2018 Edition of the Uniform Plumbing Code, together with amendments thereto
At the City Council meeting of July 18, 2018
BILL NO 2018-33 WAS READ BY TITLE AND REFERRED TO A RECOMMENDING COMMITTEE
COPIES OF THE COMPLETE ORDINANCE ARE AVAILABLE FOR PUBLIC INFORMATION IN THE OFFICE OF THE CITY CLERK, 2ND FLOOR, 495 SOUTH MAIN STREET, LAS VEGAS, NEVADA
PUB: July 19, 2018
LV Review-Journal

ISI 
LEGAL ADVERTISEMENT REPRESENTATIVE

Subscribed and sworn to before me on this 19th day of July, 2018

Notary 

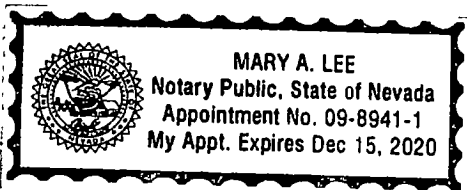

AFFIDAVIT OF PUBLICATION

STATE OF NEVADA)
COUNTY OF CLARK) SS.

RECEIVED
CITY CLERK

2018 AUG 23 A 11:55

LV CITY CLERK
495 S MAIN ST
LAS VEGAS NV 89101

Account # 22515
Ad Number 0001001645

Leslie McCormick, being 1st duly sworn, deposes and says: That she is the Legal Clerk for the Las Vegas Review-Journal and the Las Vegas Sun, daily newspapers regularly issued, published and circulated in the City of Las Vegas, County of Clark, State of Nevada, and that the advertisement, a true copy attached for, was continuously published in said Las Vegas Review-Journal and / or Las Vegas Sun in 1 edition(s) of said newspaper issued from 08/18/2018 to 08/18/2018, on the following days.

08 / 18 / 18

BILL NO. 2018-33
ORDINANCE NO. 6638

AN ORDINANCE TO ADOPT THE 2018 EDITION OF THE UNIFORM PLUMBING CODE, TOGETHER WITH AMENDMENTS THERETO, AND TO PROVIDE FOR OTHER RELATED MATTERS.

Proposed by:
Scott D. Adams, City Manager

Summary: Adopts the 2018 Edition of the Uniform Plumbing Code, together with amendments thereto.

The above and foregoing ordinance was first proposed and read by title to the City Council on the 18th day of July, 2018, and referred to a committee for recommendation; thereafter the committee reported favorably on said ordinance on the 15th day of August, 2018, which was a regular meeting of said City Council; and that at said regular meeting the proposed ordinance was read by title to the City Council as first introduced and adopted by the following vote:

VOTING "AYE": Mayor Goodman, and Councilmembers Tarkanian, Anthony, Coffin, Seroka, Fiore and Crear
VOTING "NAY": NONE
EXCUSED: NONE

COPIES OF THE COMPLETE ORDINANCE ARE AVAILABLE FOR PUBLIC INFORMATION IN THE OFFICE OF THE CITY CLERK, 2ND FLOOR, 495 SOUTH MAIN STREET, LAS VEGAS, NEVADA

PUB: August 18, 2018
LV Review-Journal

[Signature]
LEGAL ADVERTISEMENT REPRESENTATIVE

Subscribed and sworn to before me on this 20th day of August, 2018

Notary *[Signature]*

