
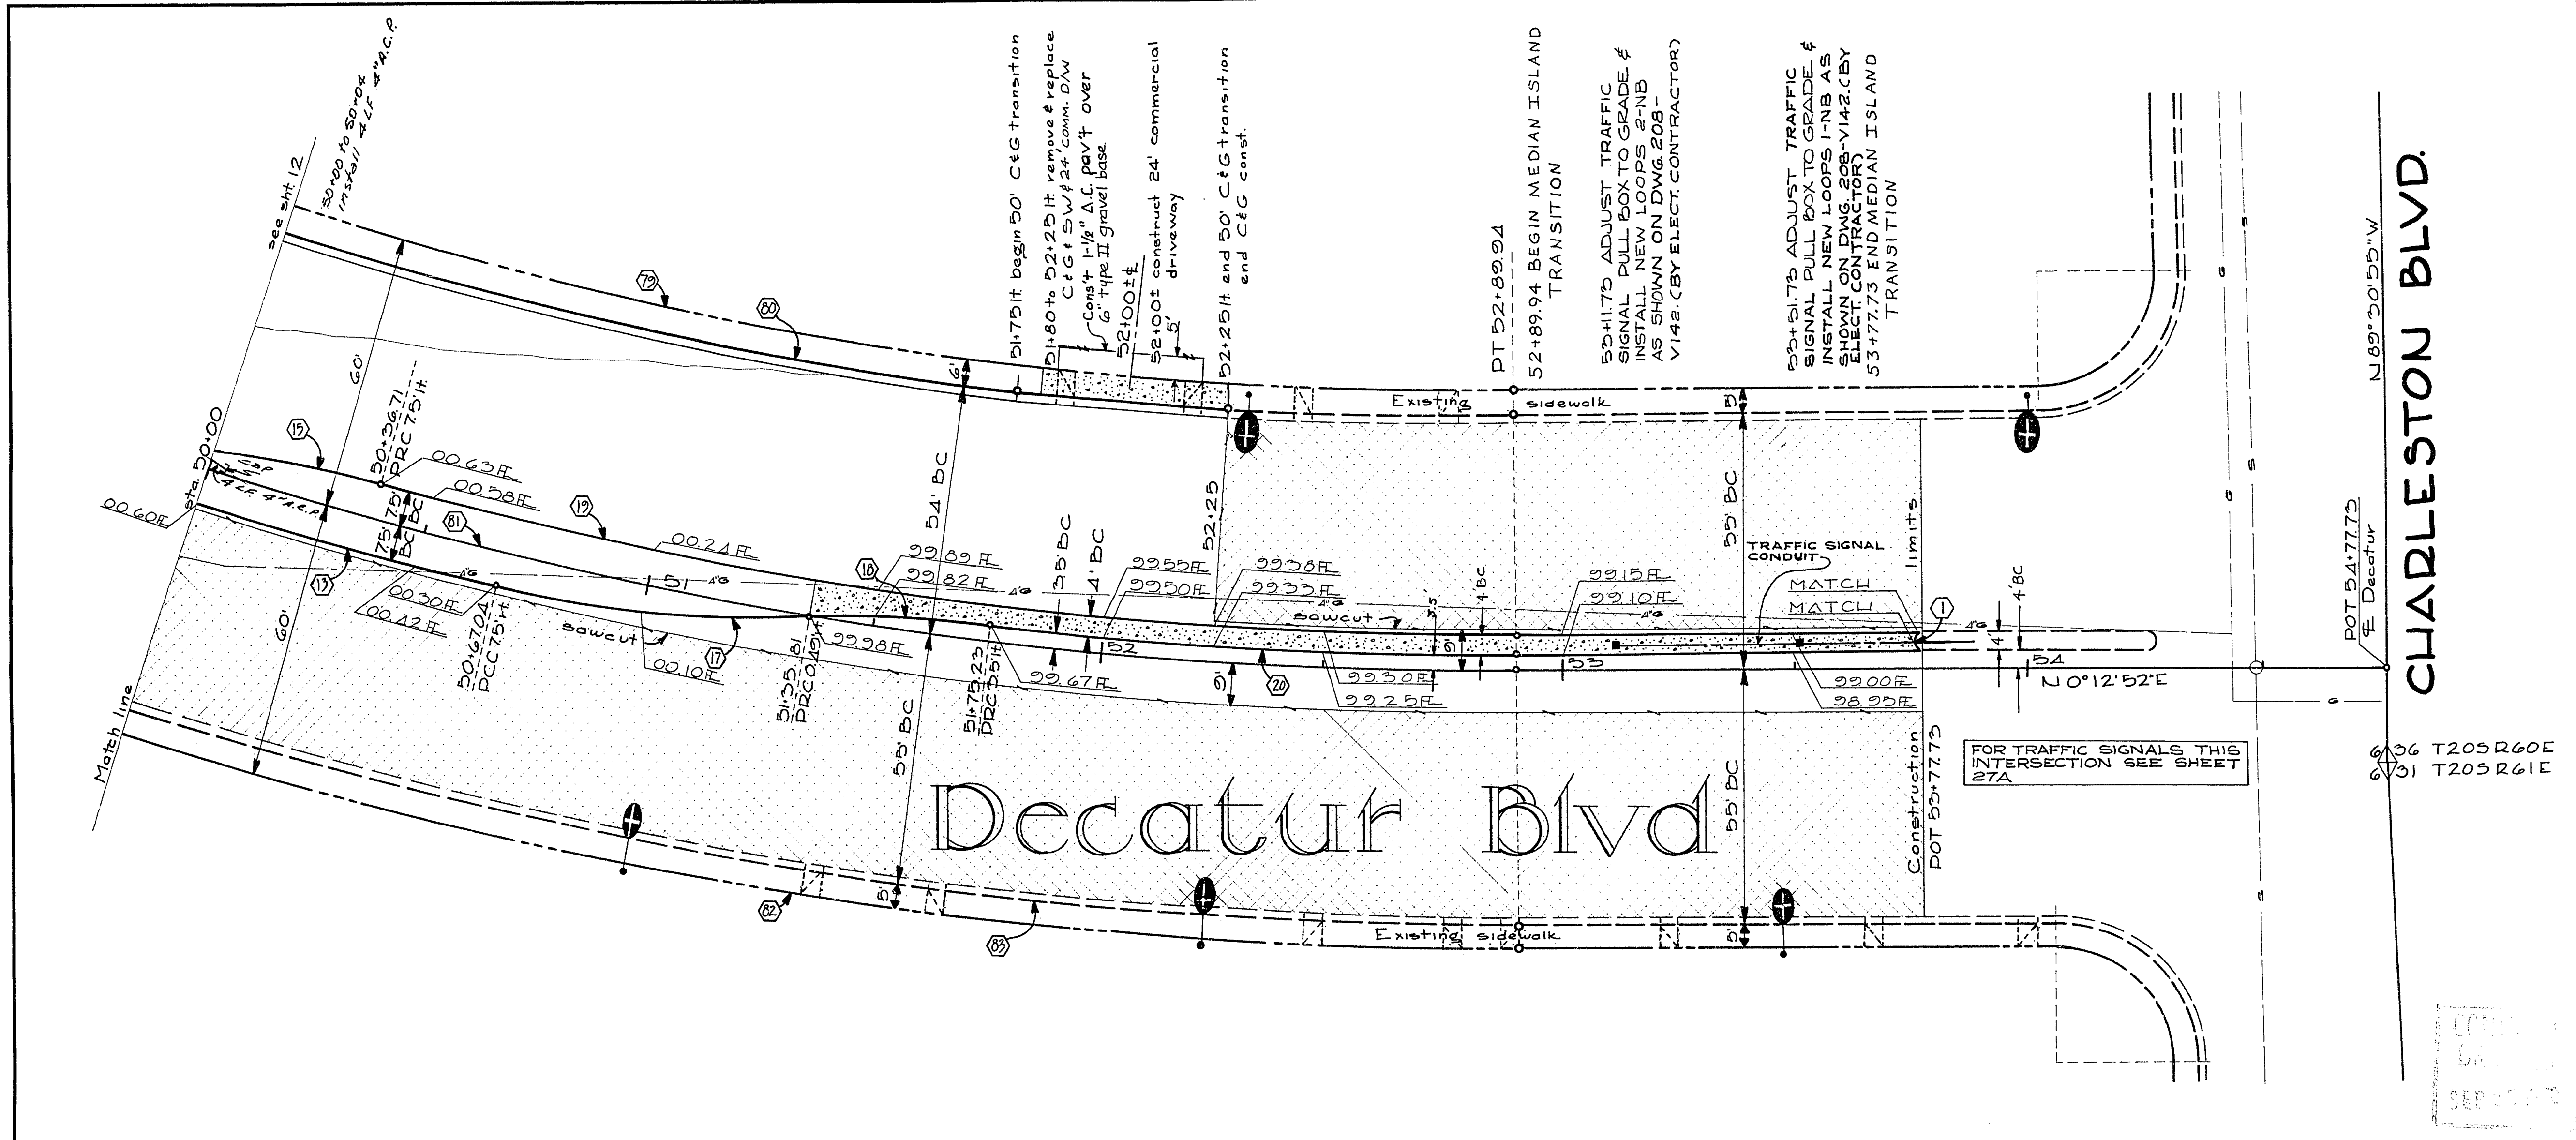


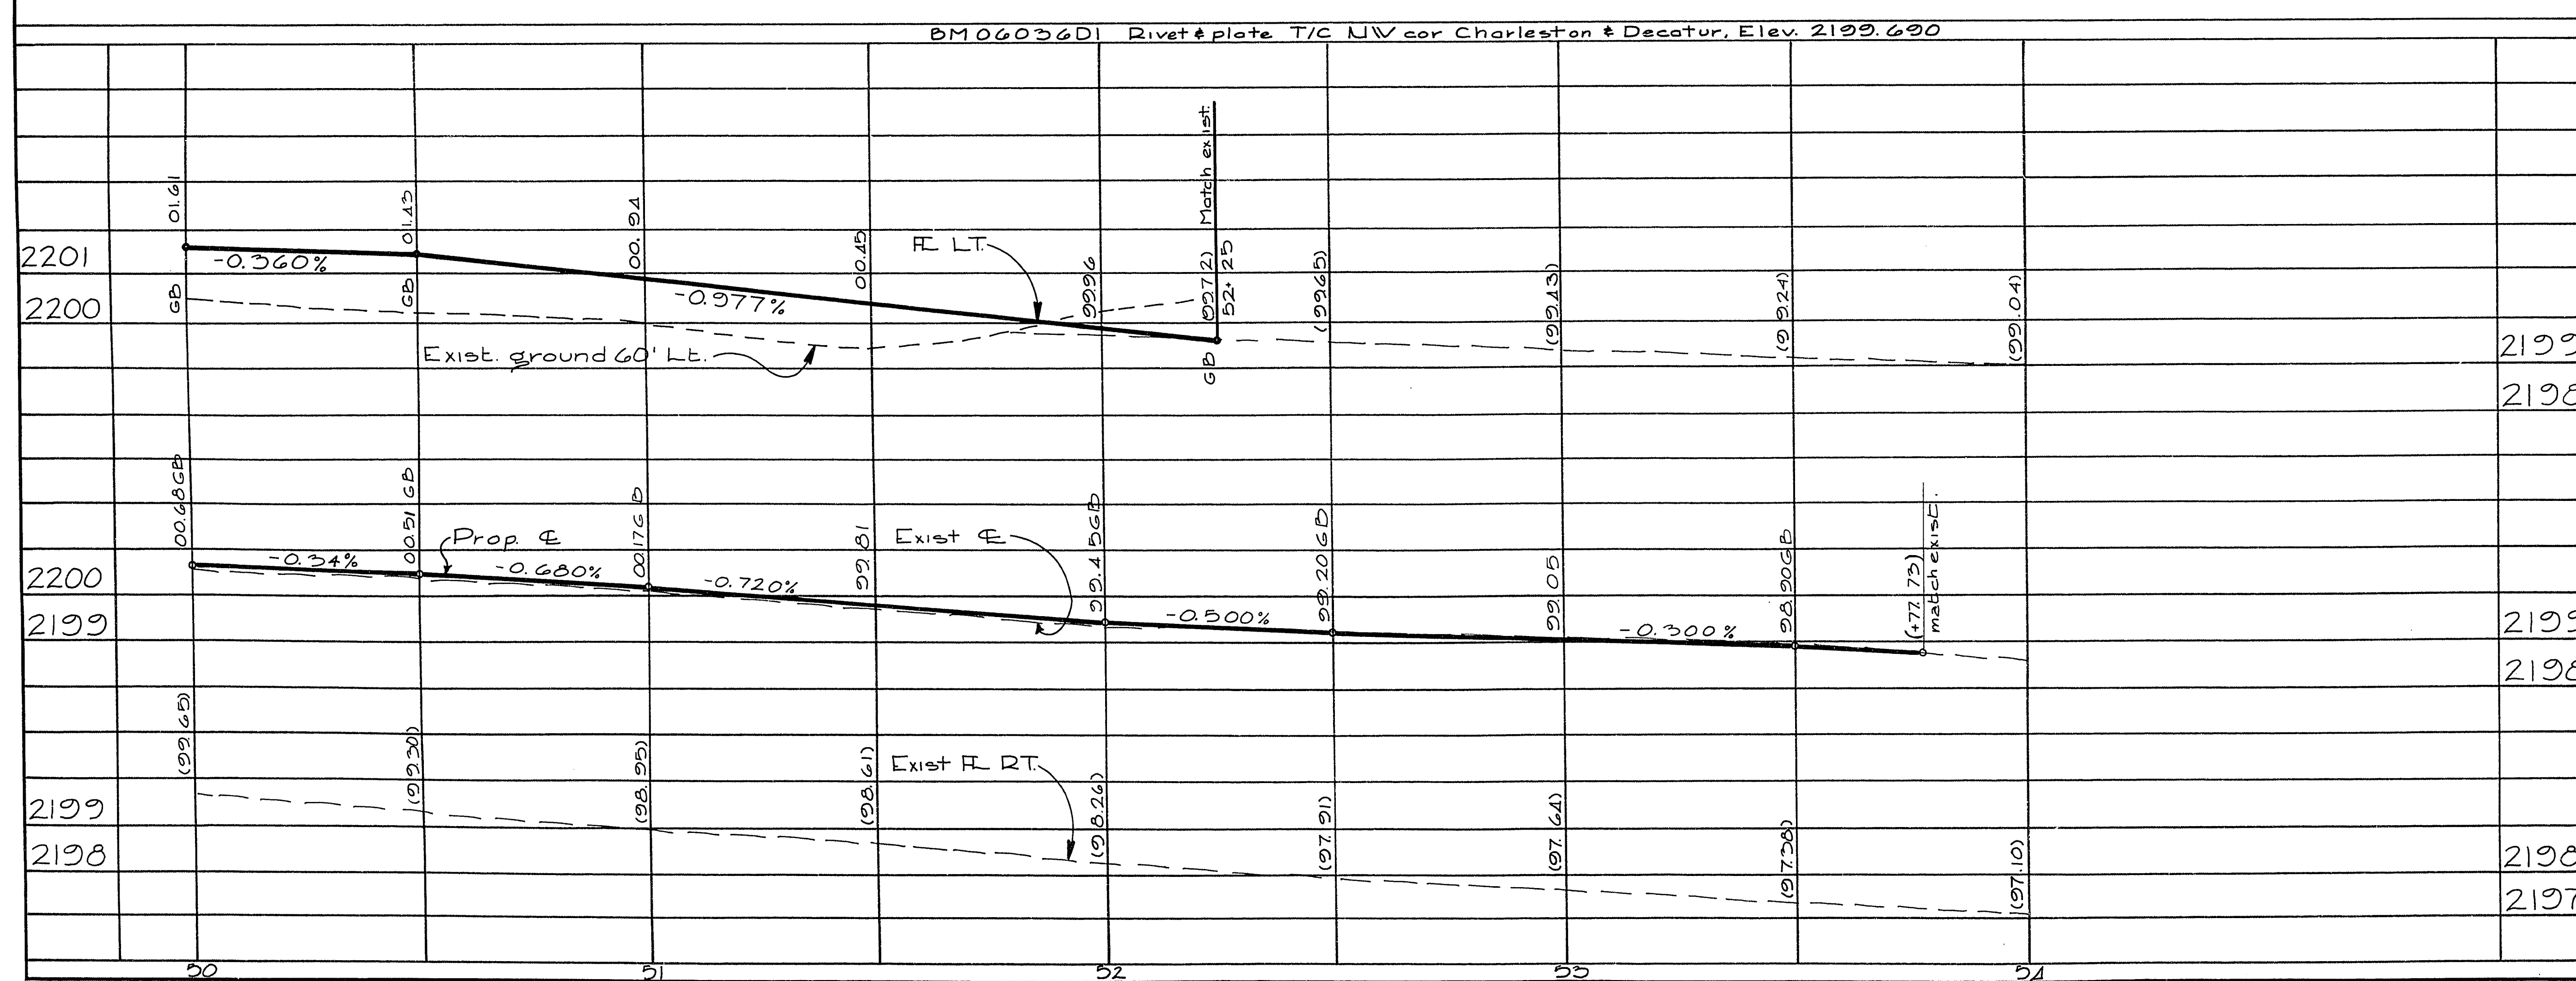

APPROXIMATE QUANTITIES - THIS SHEET			
ITEM	DESCRIPTION	RSB	TOTAL UNIT
125204	4" A.C.P.		4 LF
201100	Excavation	379	446 CY
201100	Sawcut	576	576 LF
302100	Type I gravel base	366	446 CY
302200	Type II gravel base	15	205 CY
352100	Bituminous fog seal	18	18 SY
352500	1/2" opengrade plant mix	3858	3989 SY
354000	Variable A.C. overlay	2614	2614 SY
354903	1 1/2" A.C. pavement (Island)	207	207 SY
354006	1 1/2" A.C. pavement	1244	1375 SY
340014	2 1/2" type "L" C&G	13	182 LF
340015	18" type "L" C&G	755	755 LF
340144	Island concrete	1016	1016 SF
200120	Remove concrete sidewalk	65	65 SF
200120	Remove type "L" C&G	14	14 LF
340114	Concrete sidewalk	65	65 SF
340226	Commercial driveway	256	256 SF
200120	Remove commercial driveway	224	224 SF
340144	Green Color Coating For Conc. Median Is.		5F
3340036	Green Color Coating For Asphalt Surfaced Median Is.		5F
3340036	Adjust Fire Alarm Pull (No Direct Payment)		2 SY
3340036	1 1/2" AC Pavement	18	18 SY

APPROVED BY TRAFFIC ENGINEER DATE

REVISIONS

CITY OF LAS VEGAS NEVADA
DEPARTMENT OF PUBLIC WORKS
SERVICES DIVISION

Decatur Blvd. 50+00 to 53+77.73
W. Sahara to Charleston Blvd.

W.O. NO. 7410
SC. (H) 1" = 20'
DES. G. Billingsley
DR. D.E.S.

F.B.K. NO. 68-2467-30
SC. (V) 1" = 2'
DATE 03-03-70

DRAWING NO. 107 V737
FILE NO.

APPROVED BY DIRECTOR OF PUBLIC WORKS

SHEET 13 OF 37