
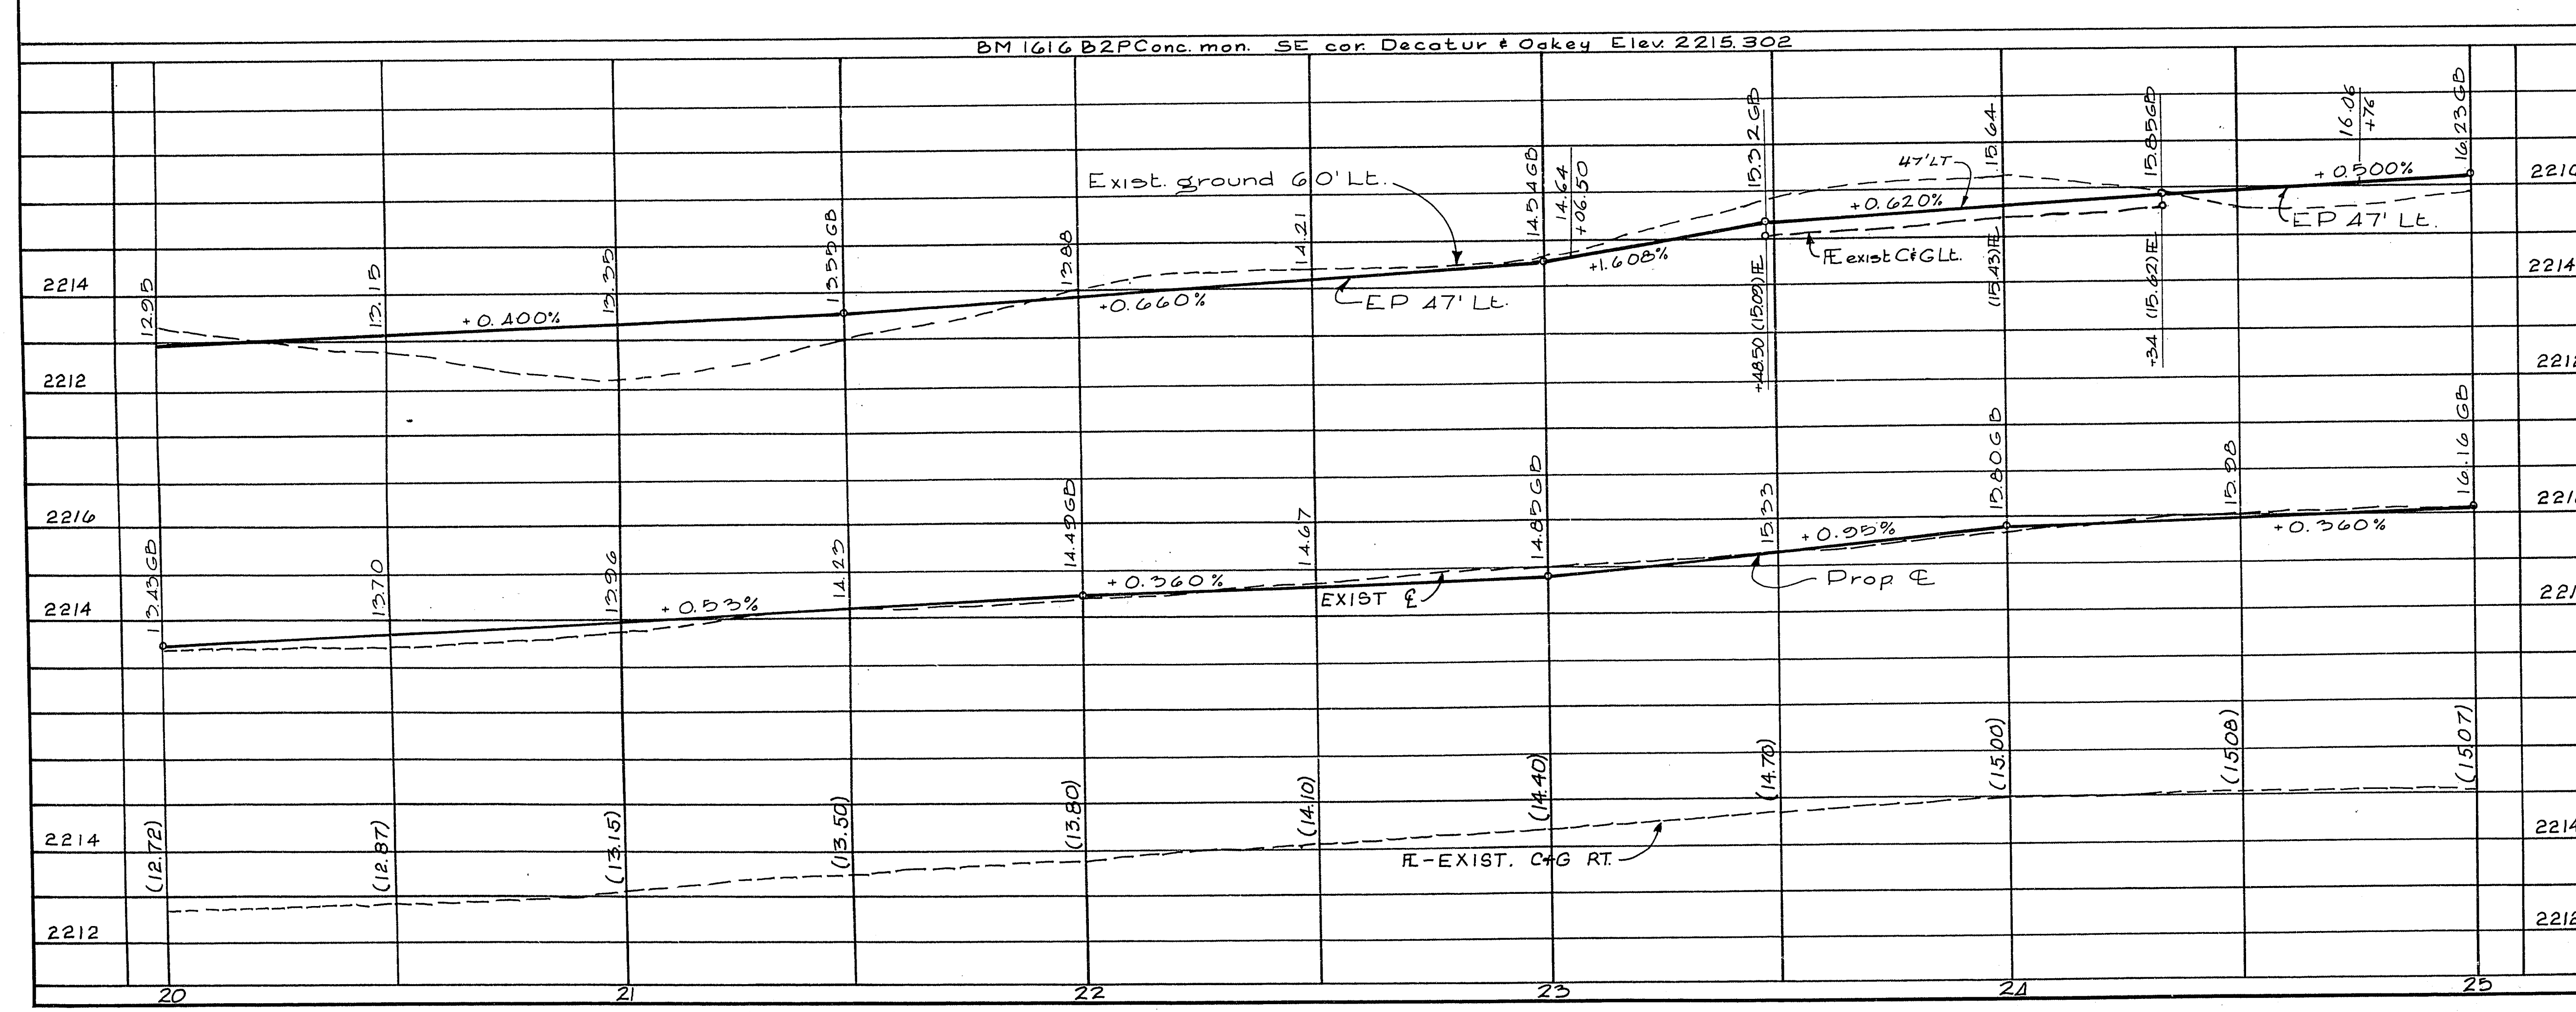


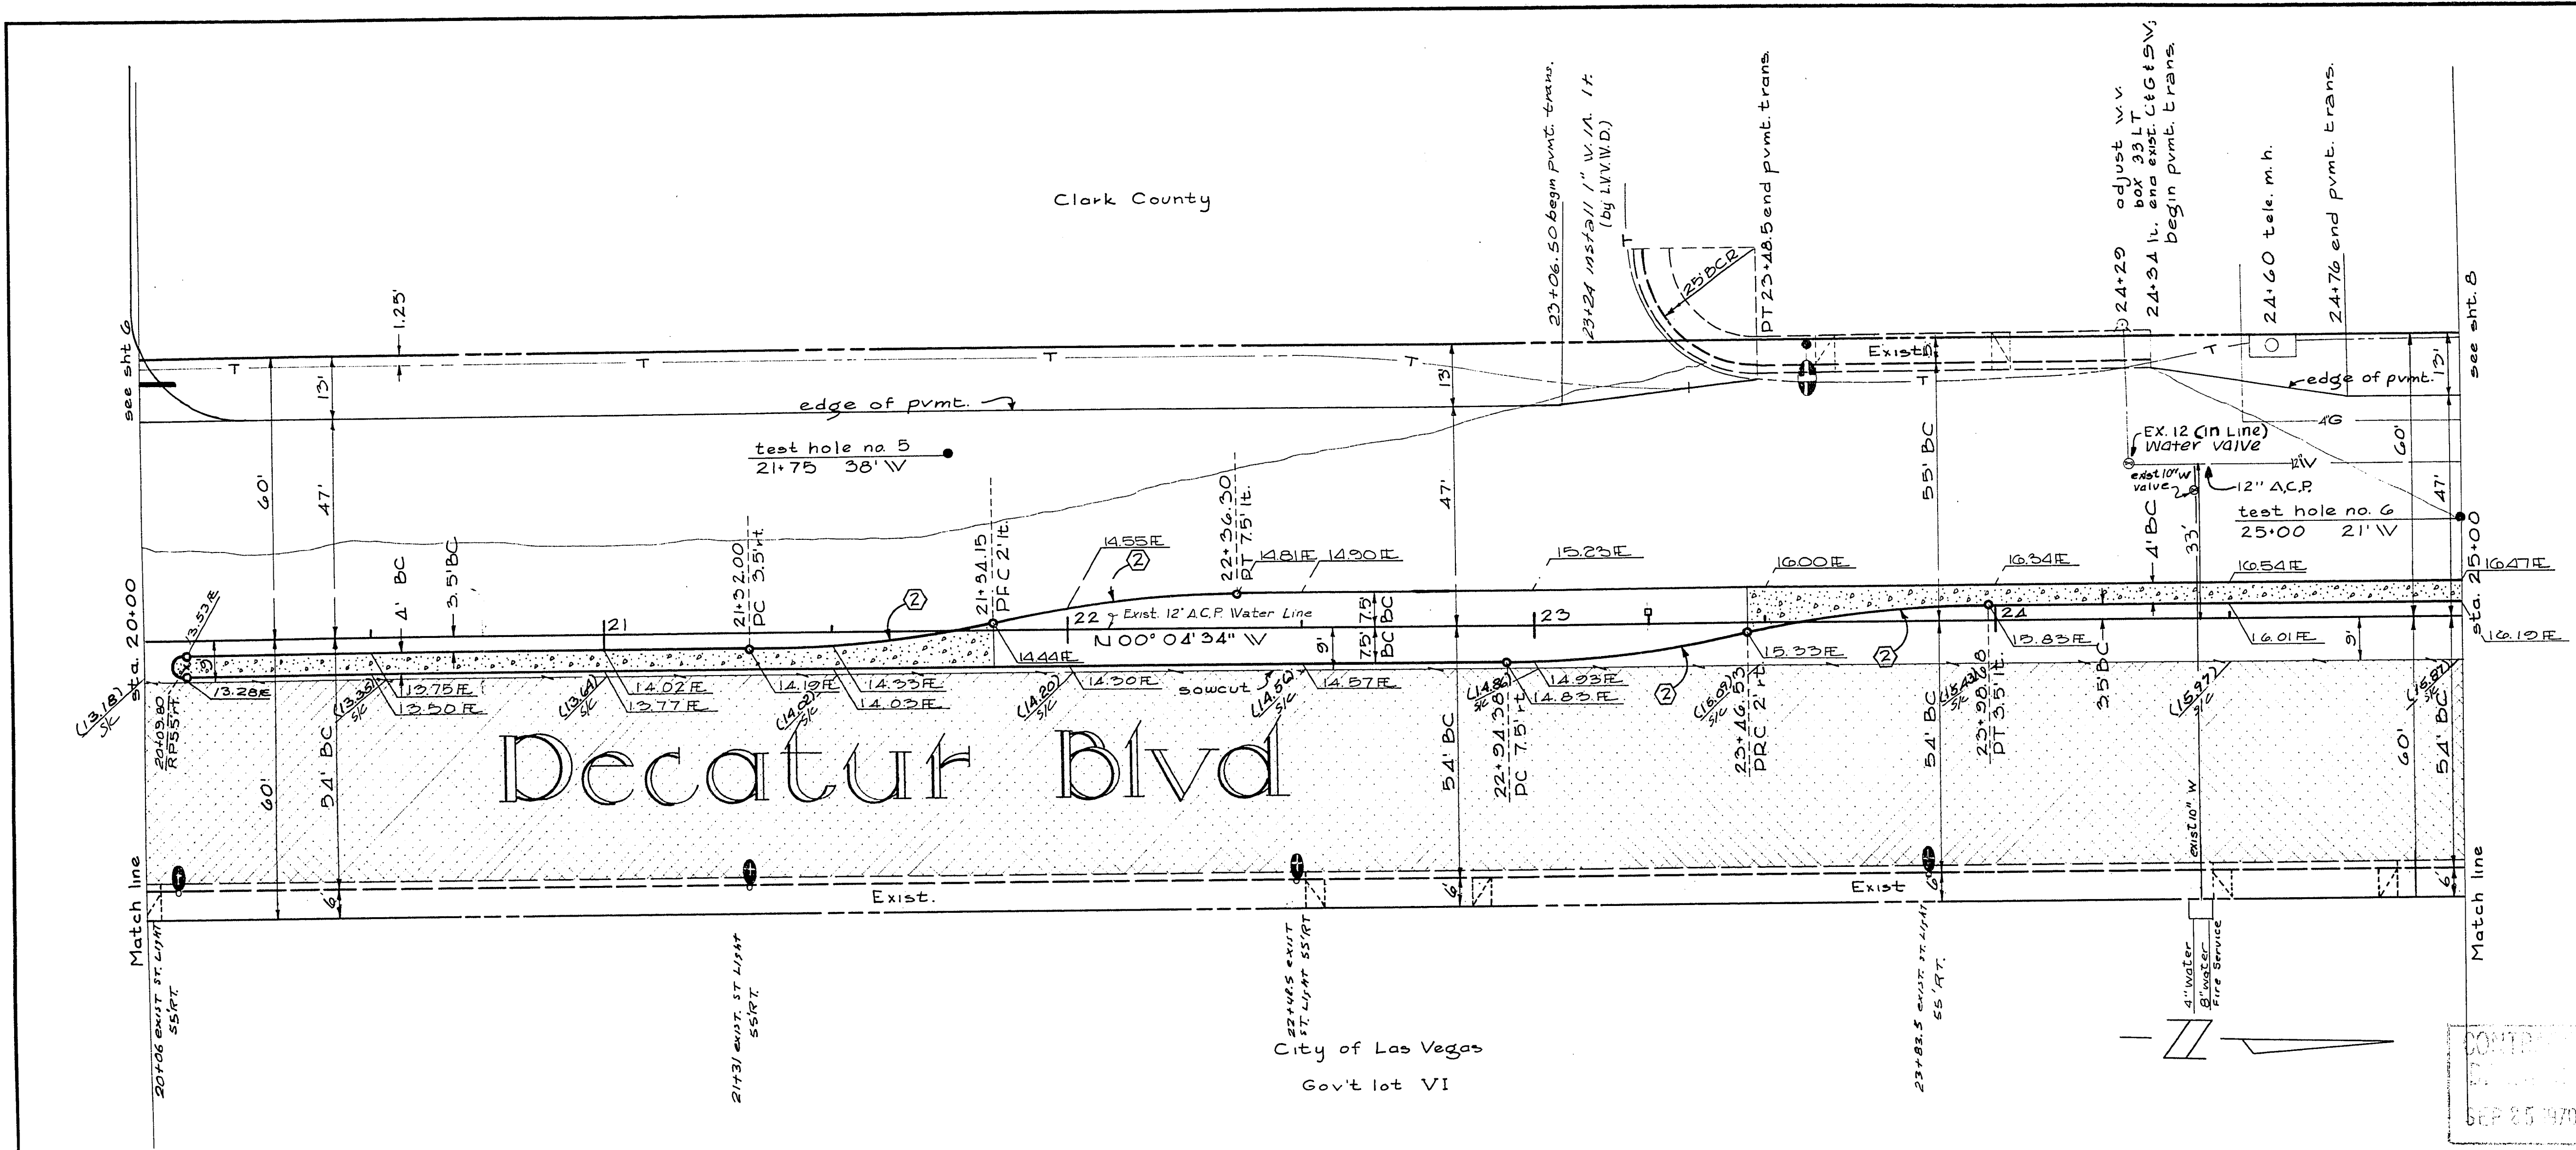

APPROXIMATE QUANTITIES - THIS SHEET			
CLV	SID	CLV	TOTAL UNIT
DESCRIPTION			
ITEM	DESCRIPTION	BSH	TOTAL UNIT
201.100	Excavation	1119	1119 CY
201.100	Sawcut	500	500 LF
202.100	Type I gravel base	734	734 CY
202.200	Type II gravel base	343	343 CY
203.100	Bituminous fog seal	230	230 SY
203.500	1/2" open grade plant mix	4999	4999 SY
204.000	Variable A.C. overlay	2589	2589 SY
204.903	1 1/2" A.C. Island pavement	230	230 SY
204.906	2" A.C. pavement	2610	2610 SY
204.913	18" type "L" C&G	986	986 LF
204.914	Island concrete	1592	1592 SF
334.146	Green Color Coating For Conc. Median Is.	1592	1592 SF
334.003	Green Color Coating For Asphalt Surfaced Median Is.	230	230 SY

APPROVED BY TRAFFIC ENGINEER

DATE

No.

Description

by

date

approved

REVISIONS

CITY OF LAS VEGAS NEVADA

DEPARTMENT OF PUBLIC WORKS

SERVICES DIVISION

Decatur Blvd. 20+00 to 25+00

W Sahara to Charleston Blvd.

W.O. NO. 7610

F.B.K. NO. 67-3X

DATE

DRAWING NO.

SC. (H) 1" = 20'

SC. (V) 1" = 2'

3/12/70

107V737

DES. G. BILLINGSLEY

DR. D.E. S. & C.K.

APPROVED BY DIRECTOR OF PUBLIC WORKS

FILE NO.

SHEET 7 OF 37