



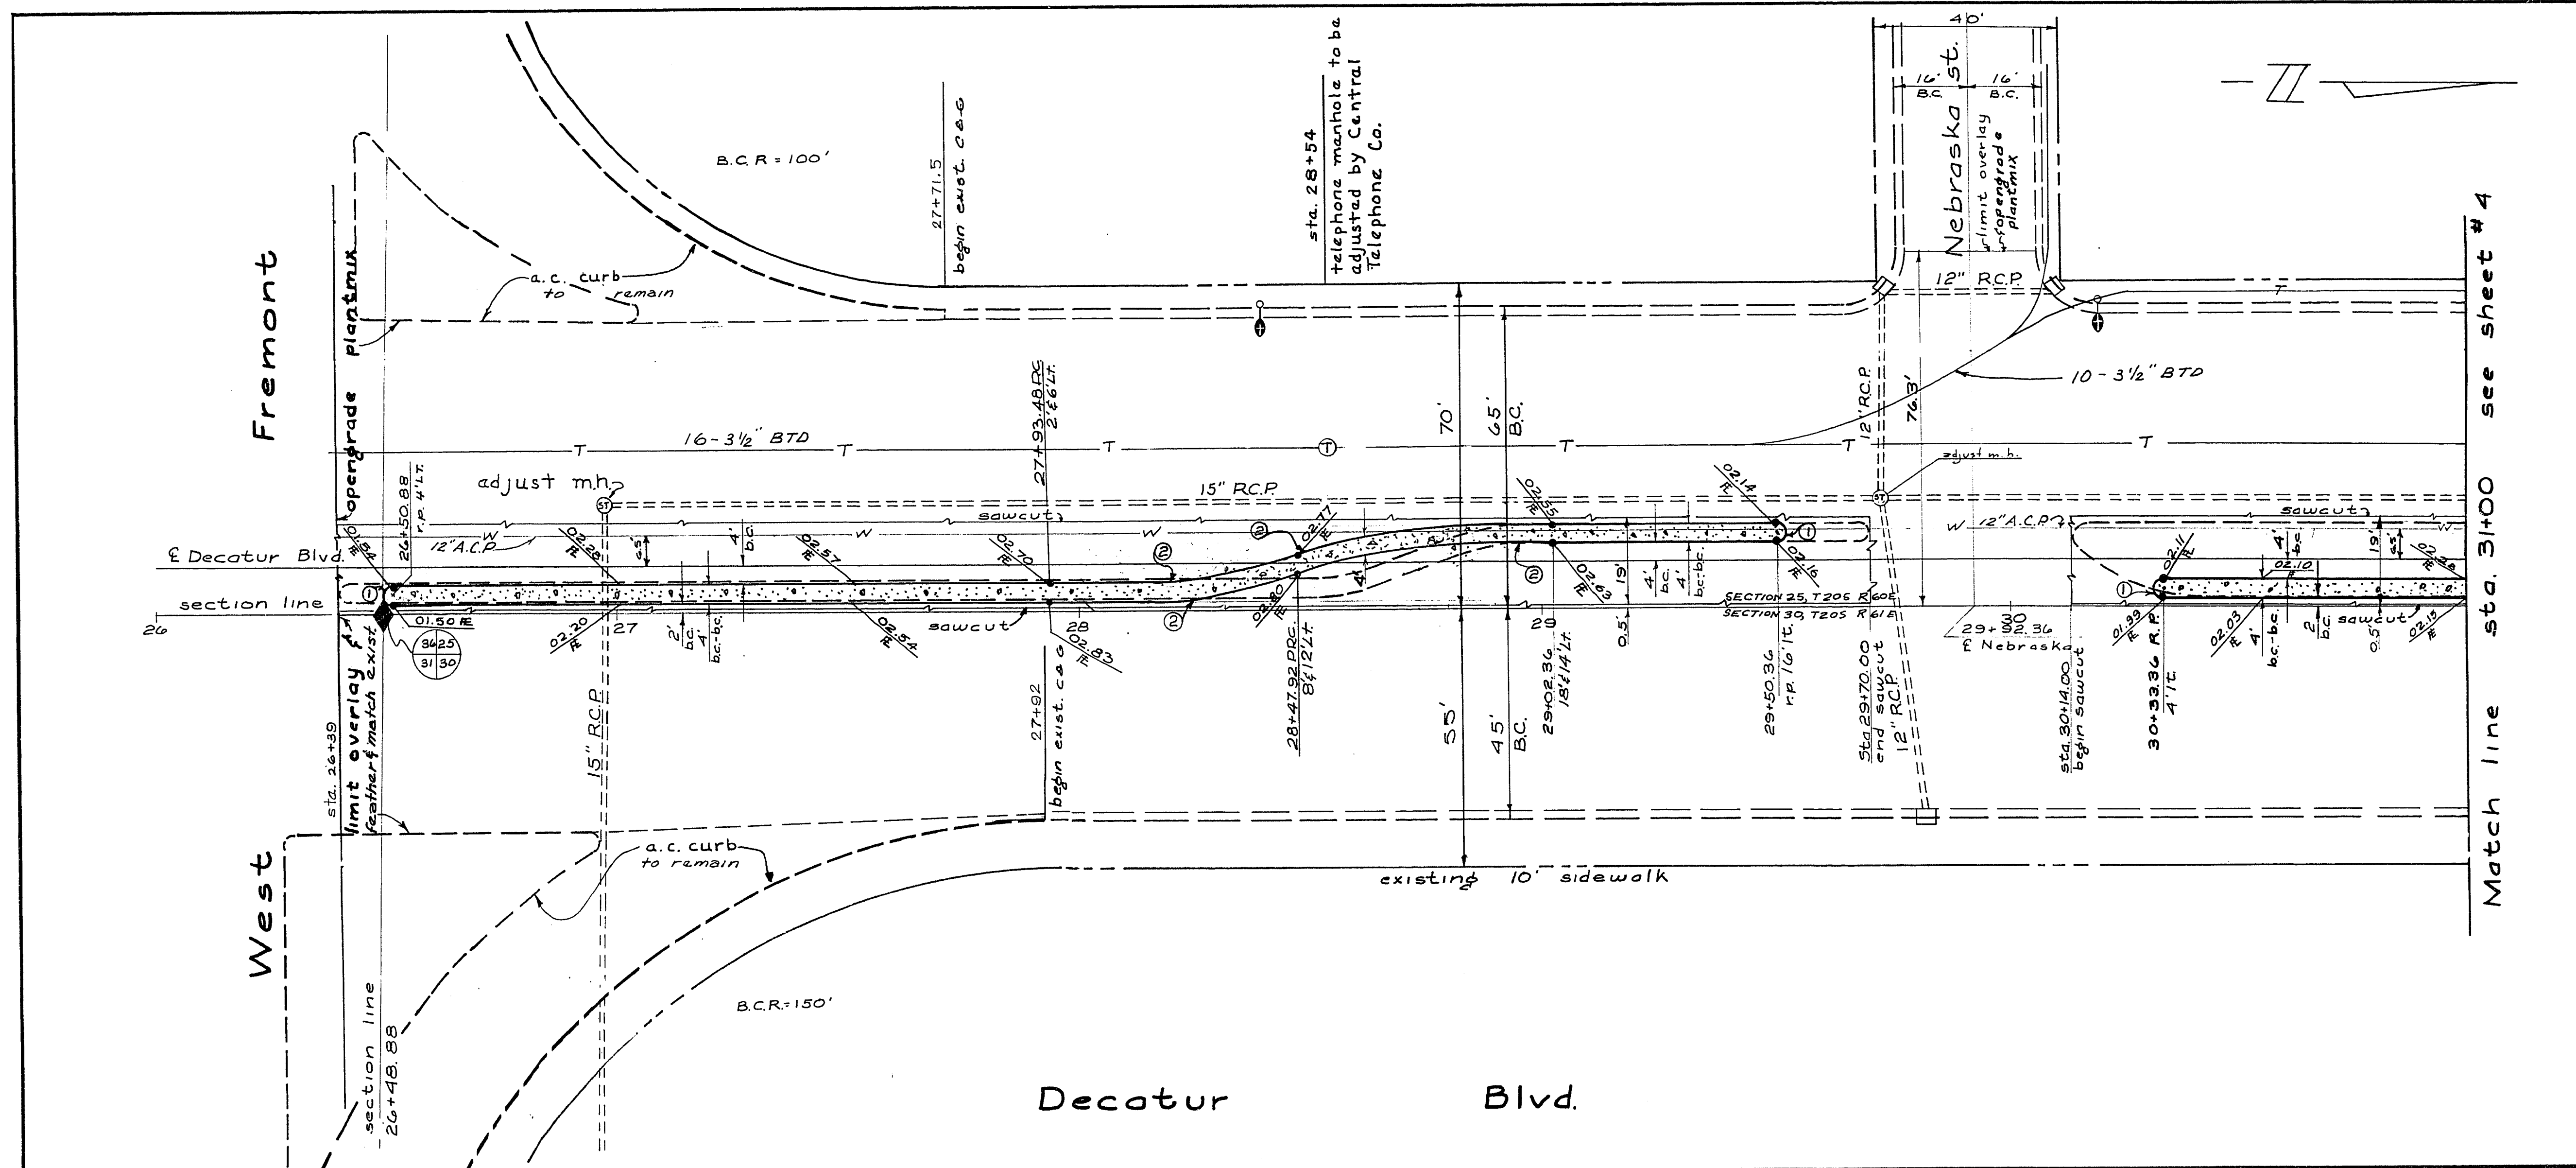

Quantities this sheet			total	unit
Item no.	description			
302100	type I gravel base		244	cy
201100	excavation		423	cy
502200	type II gravel base		110	cy
355500	1/2" opengrade plantmix		6055	cy
355100	1" A.C. overlay		6065	cy
354000	1 1/2" A.C. pavement		590	cy
354004	2" A.C. pavement		753	cy
340013	island curb		1487	sf
340146	island concrete		891	sf
201100	sawcut		2	ea
512120	adjust manhole			

Curve data				
no.	delta	radius	length	tangent
①	180°00'00"	2.00'	6.28'	∞
②	12°34'41"	250.00'	54.88'	27.55'

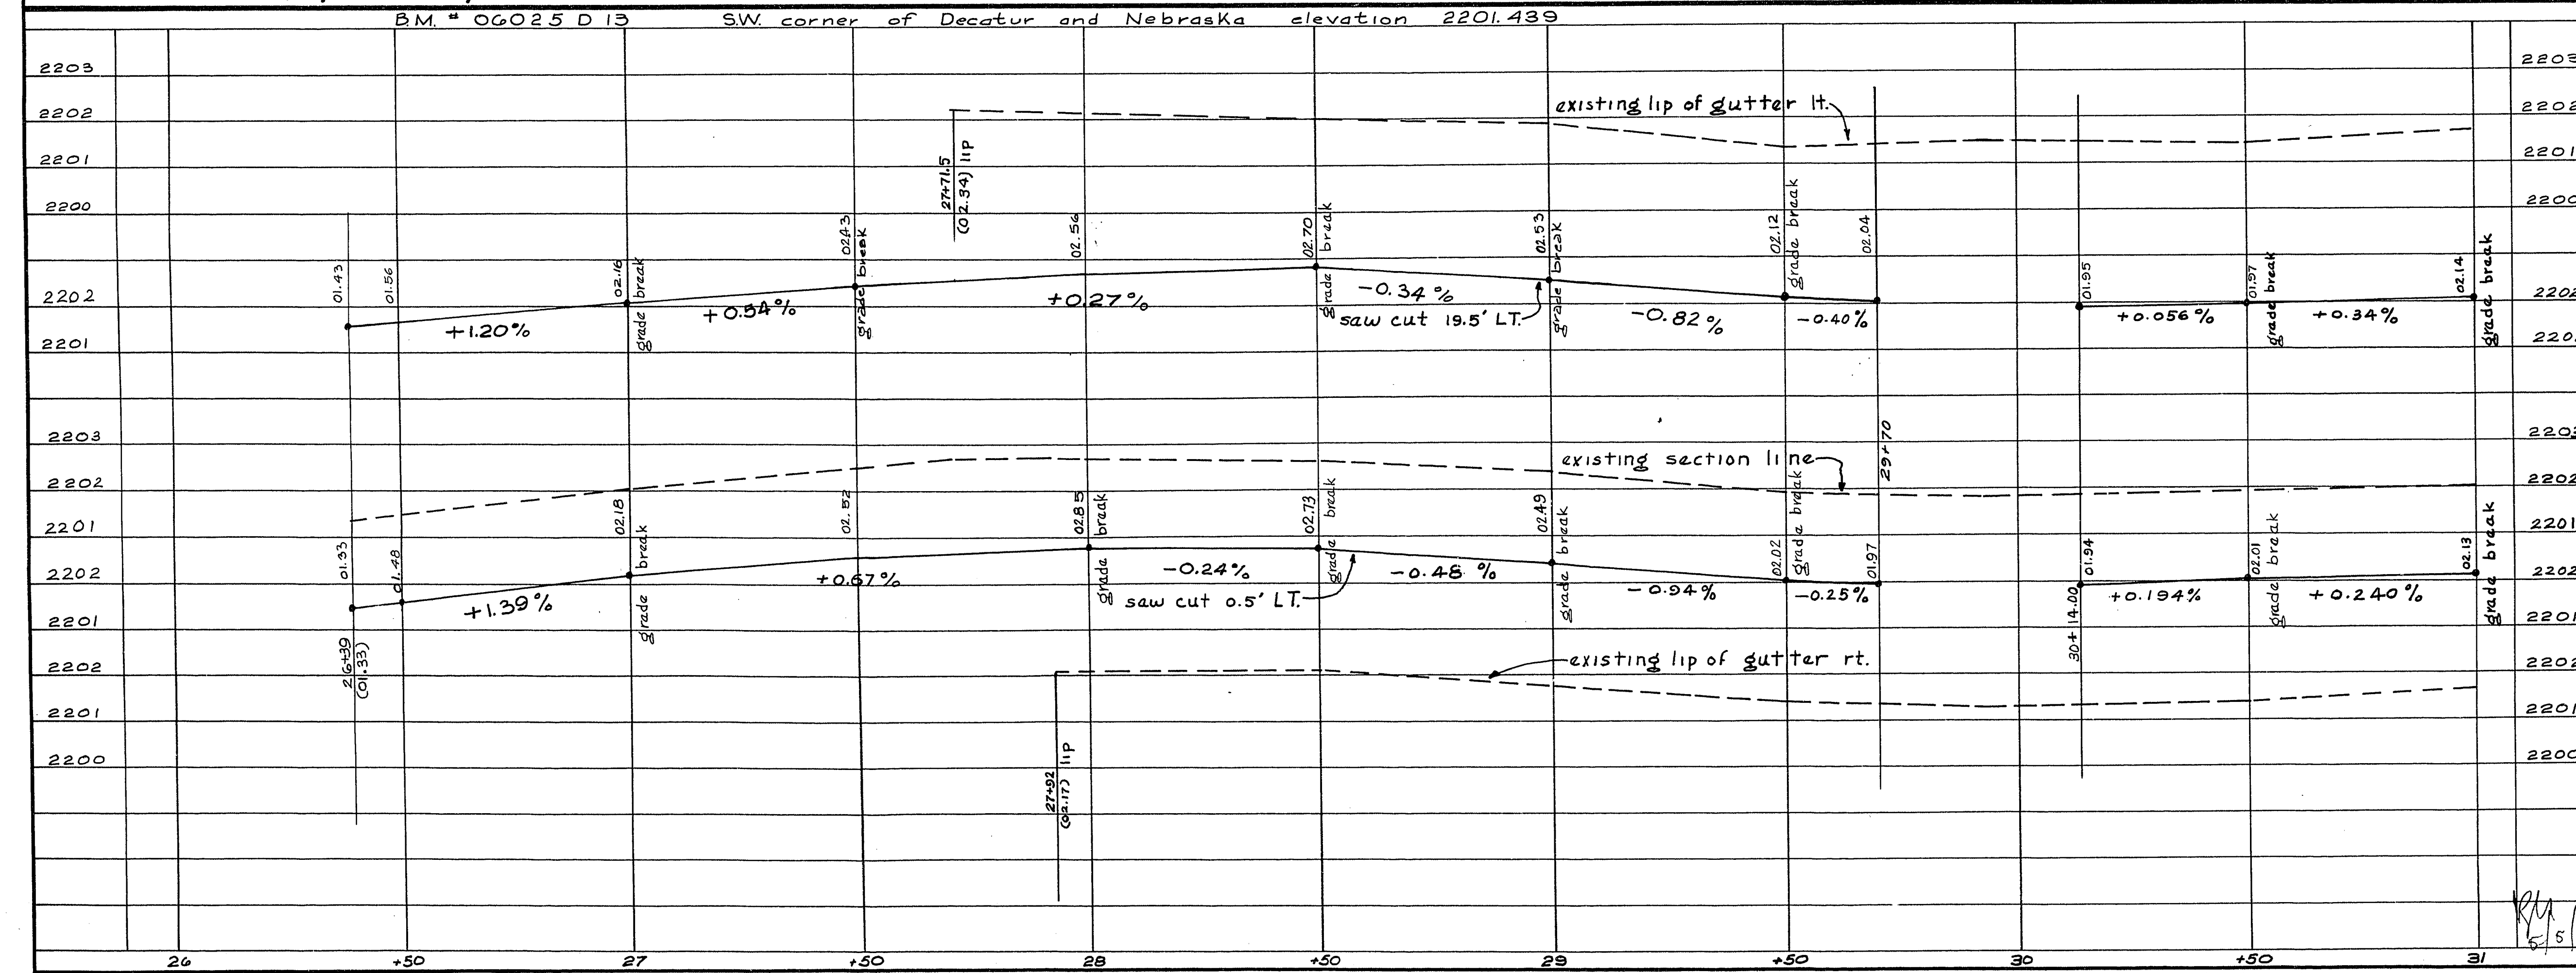

REVISIONS

revision no.	description	by	date	approved
1	CHANGE OPEN GRADE LIMIT			

CITY OF LAS VEGAS NEVADA
DEPARTMENT OF PUBLIC WORKS
SERVICES DIVISION

Decatur Blvd

West Fremont to Washington Avenue

W.O. NO. 3082 F.B.K. NO. 68-2X
S.C. (N) 1"=250' S.C. (V) 1"=2'
DES. G. Billinsley
DR. C. Krehnow
APPROVED BY DIRECTOR OF PUBLIC WORKS

DATE 27Apr170
DRAWING NO. 107-V817
FILE NO.

SHEET 3 OF 9