
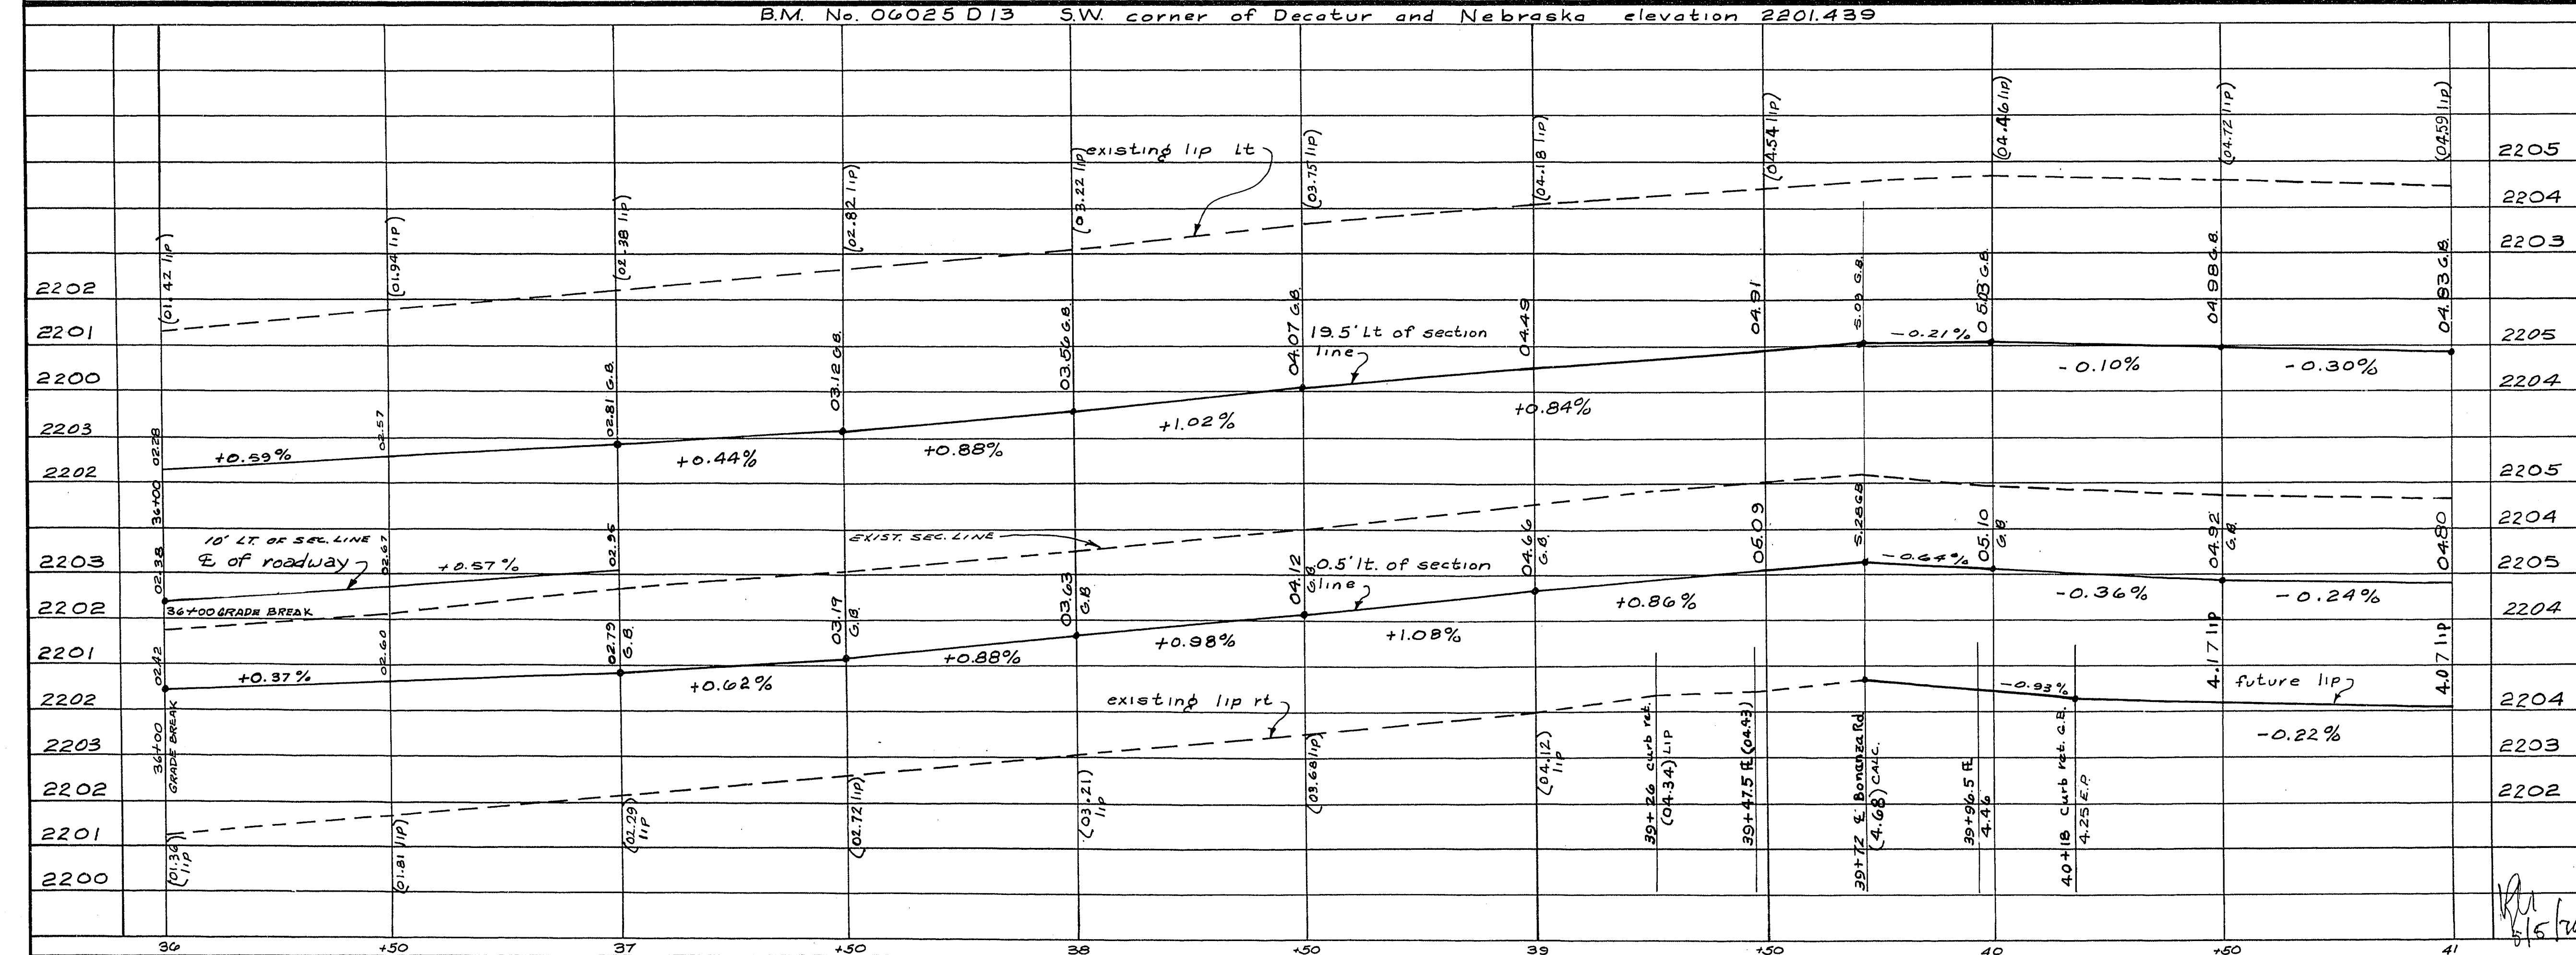


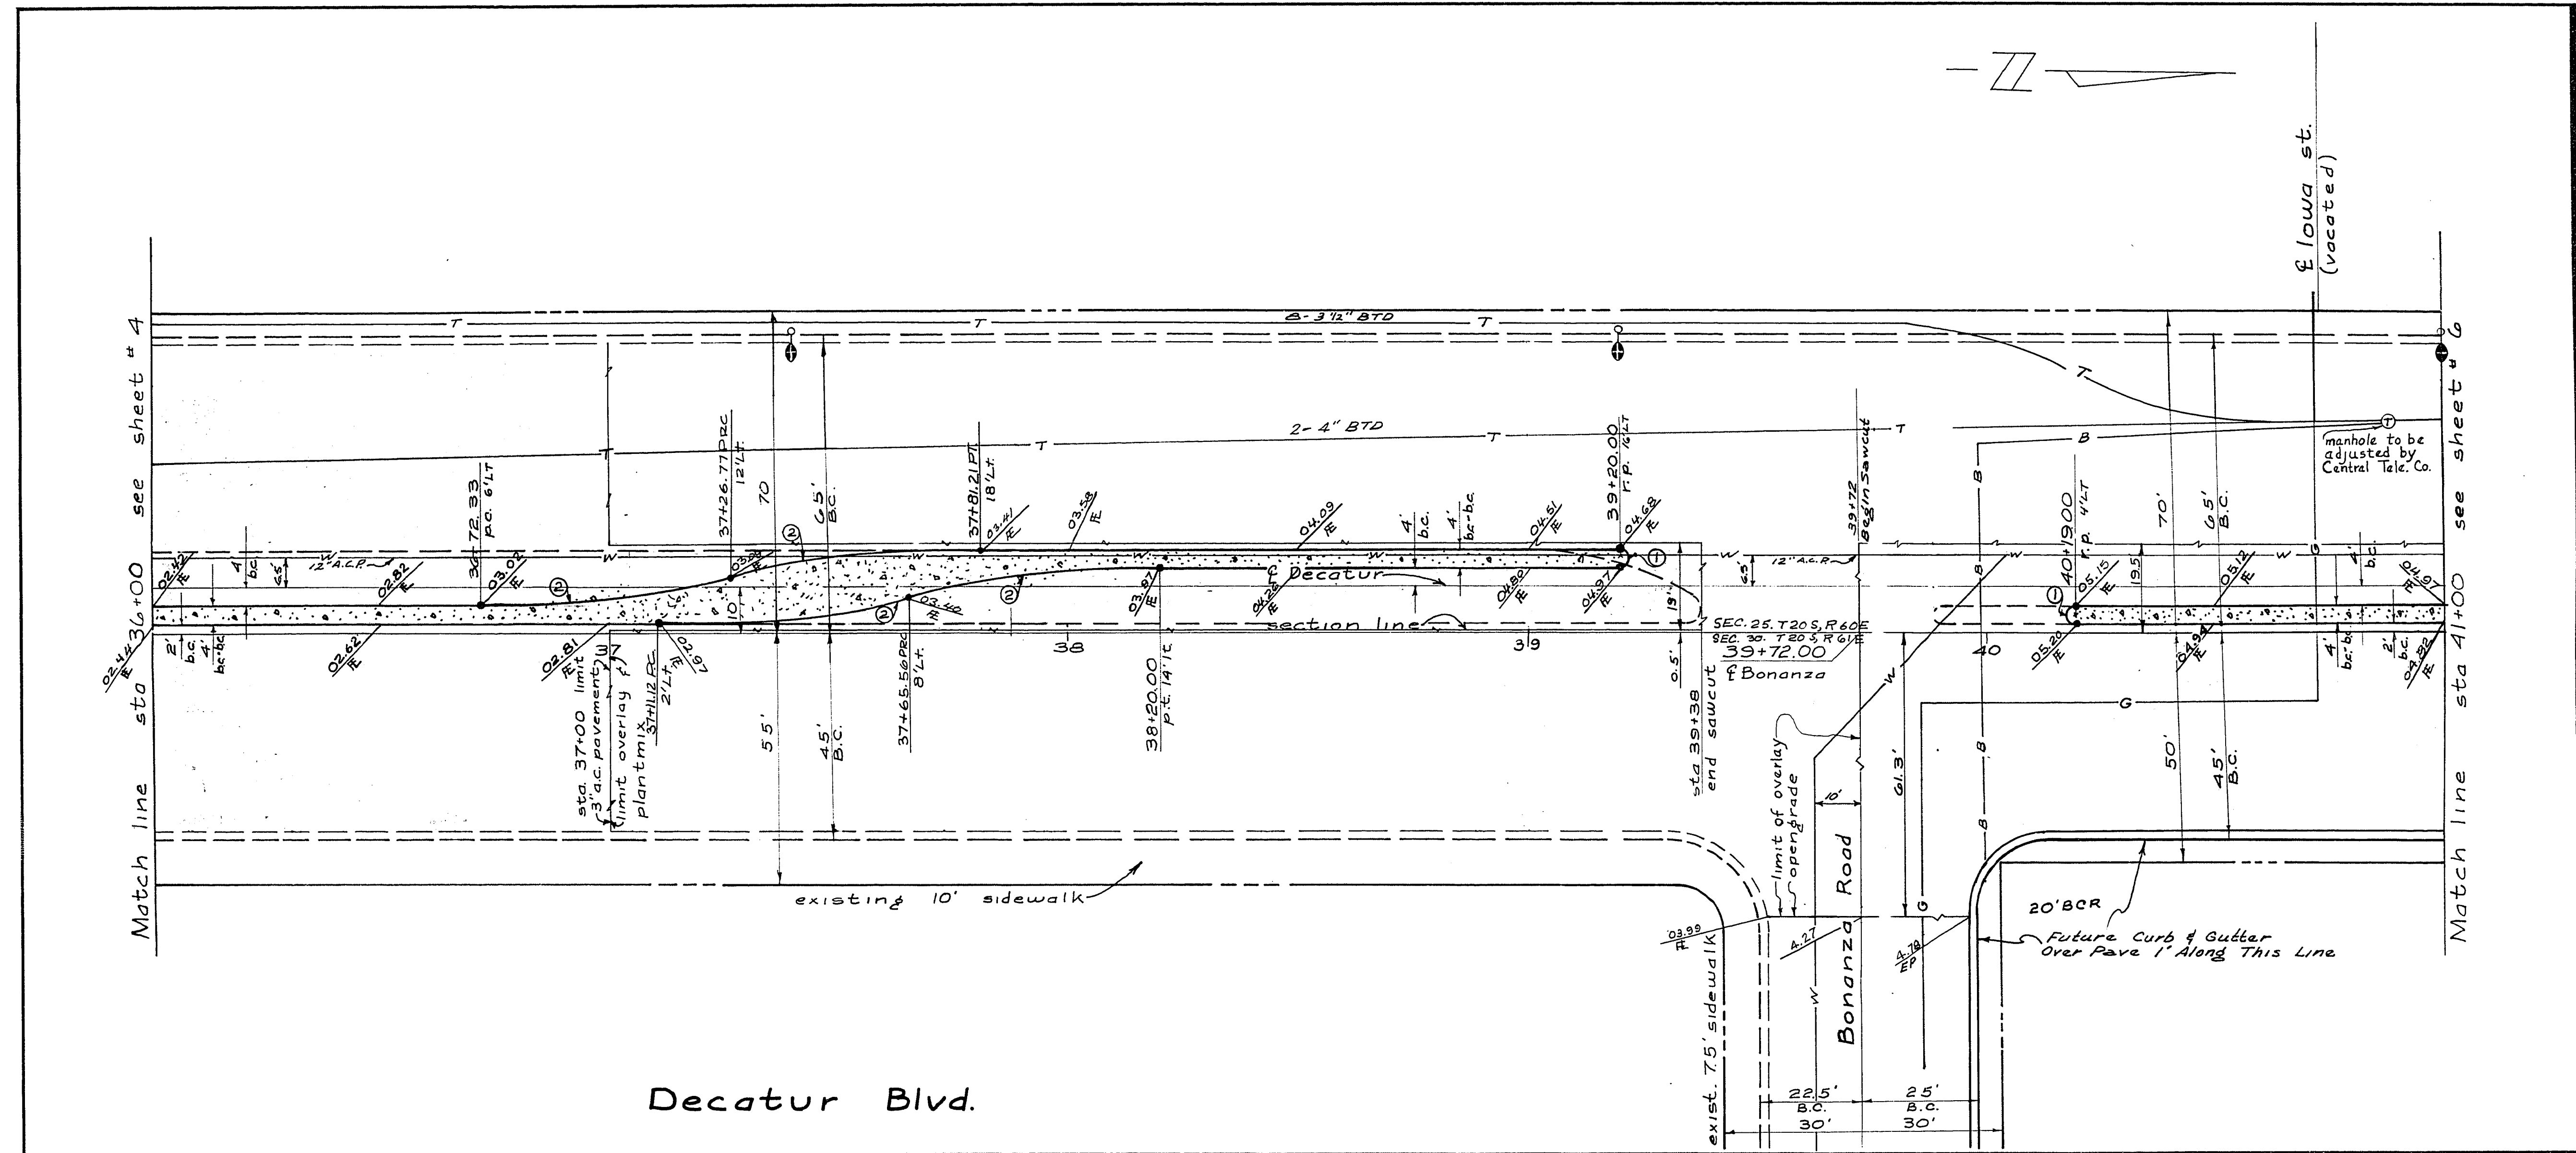

Quantities this sheet			
Item no.	Description	Unit	Total
302.100	Type I gravel base	CY	812
302.100	Excavation	CY	1393
302.200	Type II gravel base	CY	346
355.500	1/2" opengrade plant mix	SY	5581
355.100	1" A.C. overlay	SY	5581
355.004	1 1/2" A.C. pavement	SY	2552
355.004	2" A.C. pavement	SY	817
340.013	Island curb	LF	2118
340.148	Island concrete	SF	814
340.100	SHADER	LF	

Curve data			
no.	delta	radius	length
①	180°00'00"	2.00'	6.28'
②	12°34'41"	250.00'	54.88'

I HEREBY CERTIFY THAT THIS PLAN
 WAS PREPARED BY ME OR UNDER MY
 CLOSE PERSONAL SUPERVISION AND
 THAT I AM A LICENSED PROFESSIONAL
 ENGINEER.
 JAY M. PRADLER
 P.E. 1634
 DATE 4/24/70

CONTRACT
 DRAWING
 MAY 22 1970

REVISIONS				
revision no.	description	by	date	approved

CITY OF LAS VEGAS NEVADA
 DEPARTMENT OF PUBLIC WORKS
 SERVICES DIVISION
Decatur Blvd
 West Fremont to Washington Avenue
 W.O. NO. 3082 F.B.K. NO. 68-2X DATE 27Apr 1970 DRAWING NO. 107-VB17
 SC. (H) 1" = 20' SC. (V) 1" = 2'
 DES. G. Billingsley
 DR. C. Krehmer
 APPROVED BY DIRECTOR OF PUBLIC WORKS
 SHEET 5 OF 9

54-5