


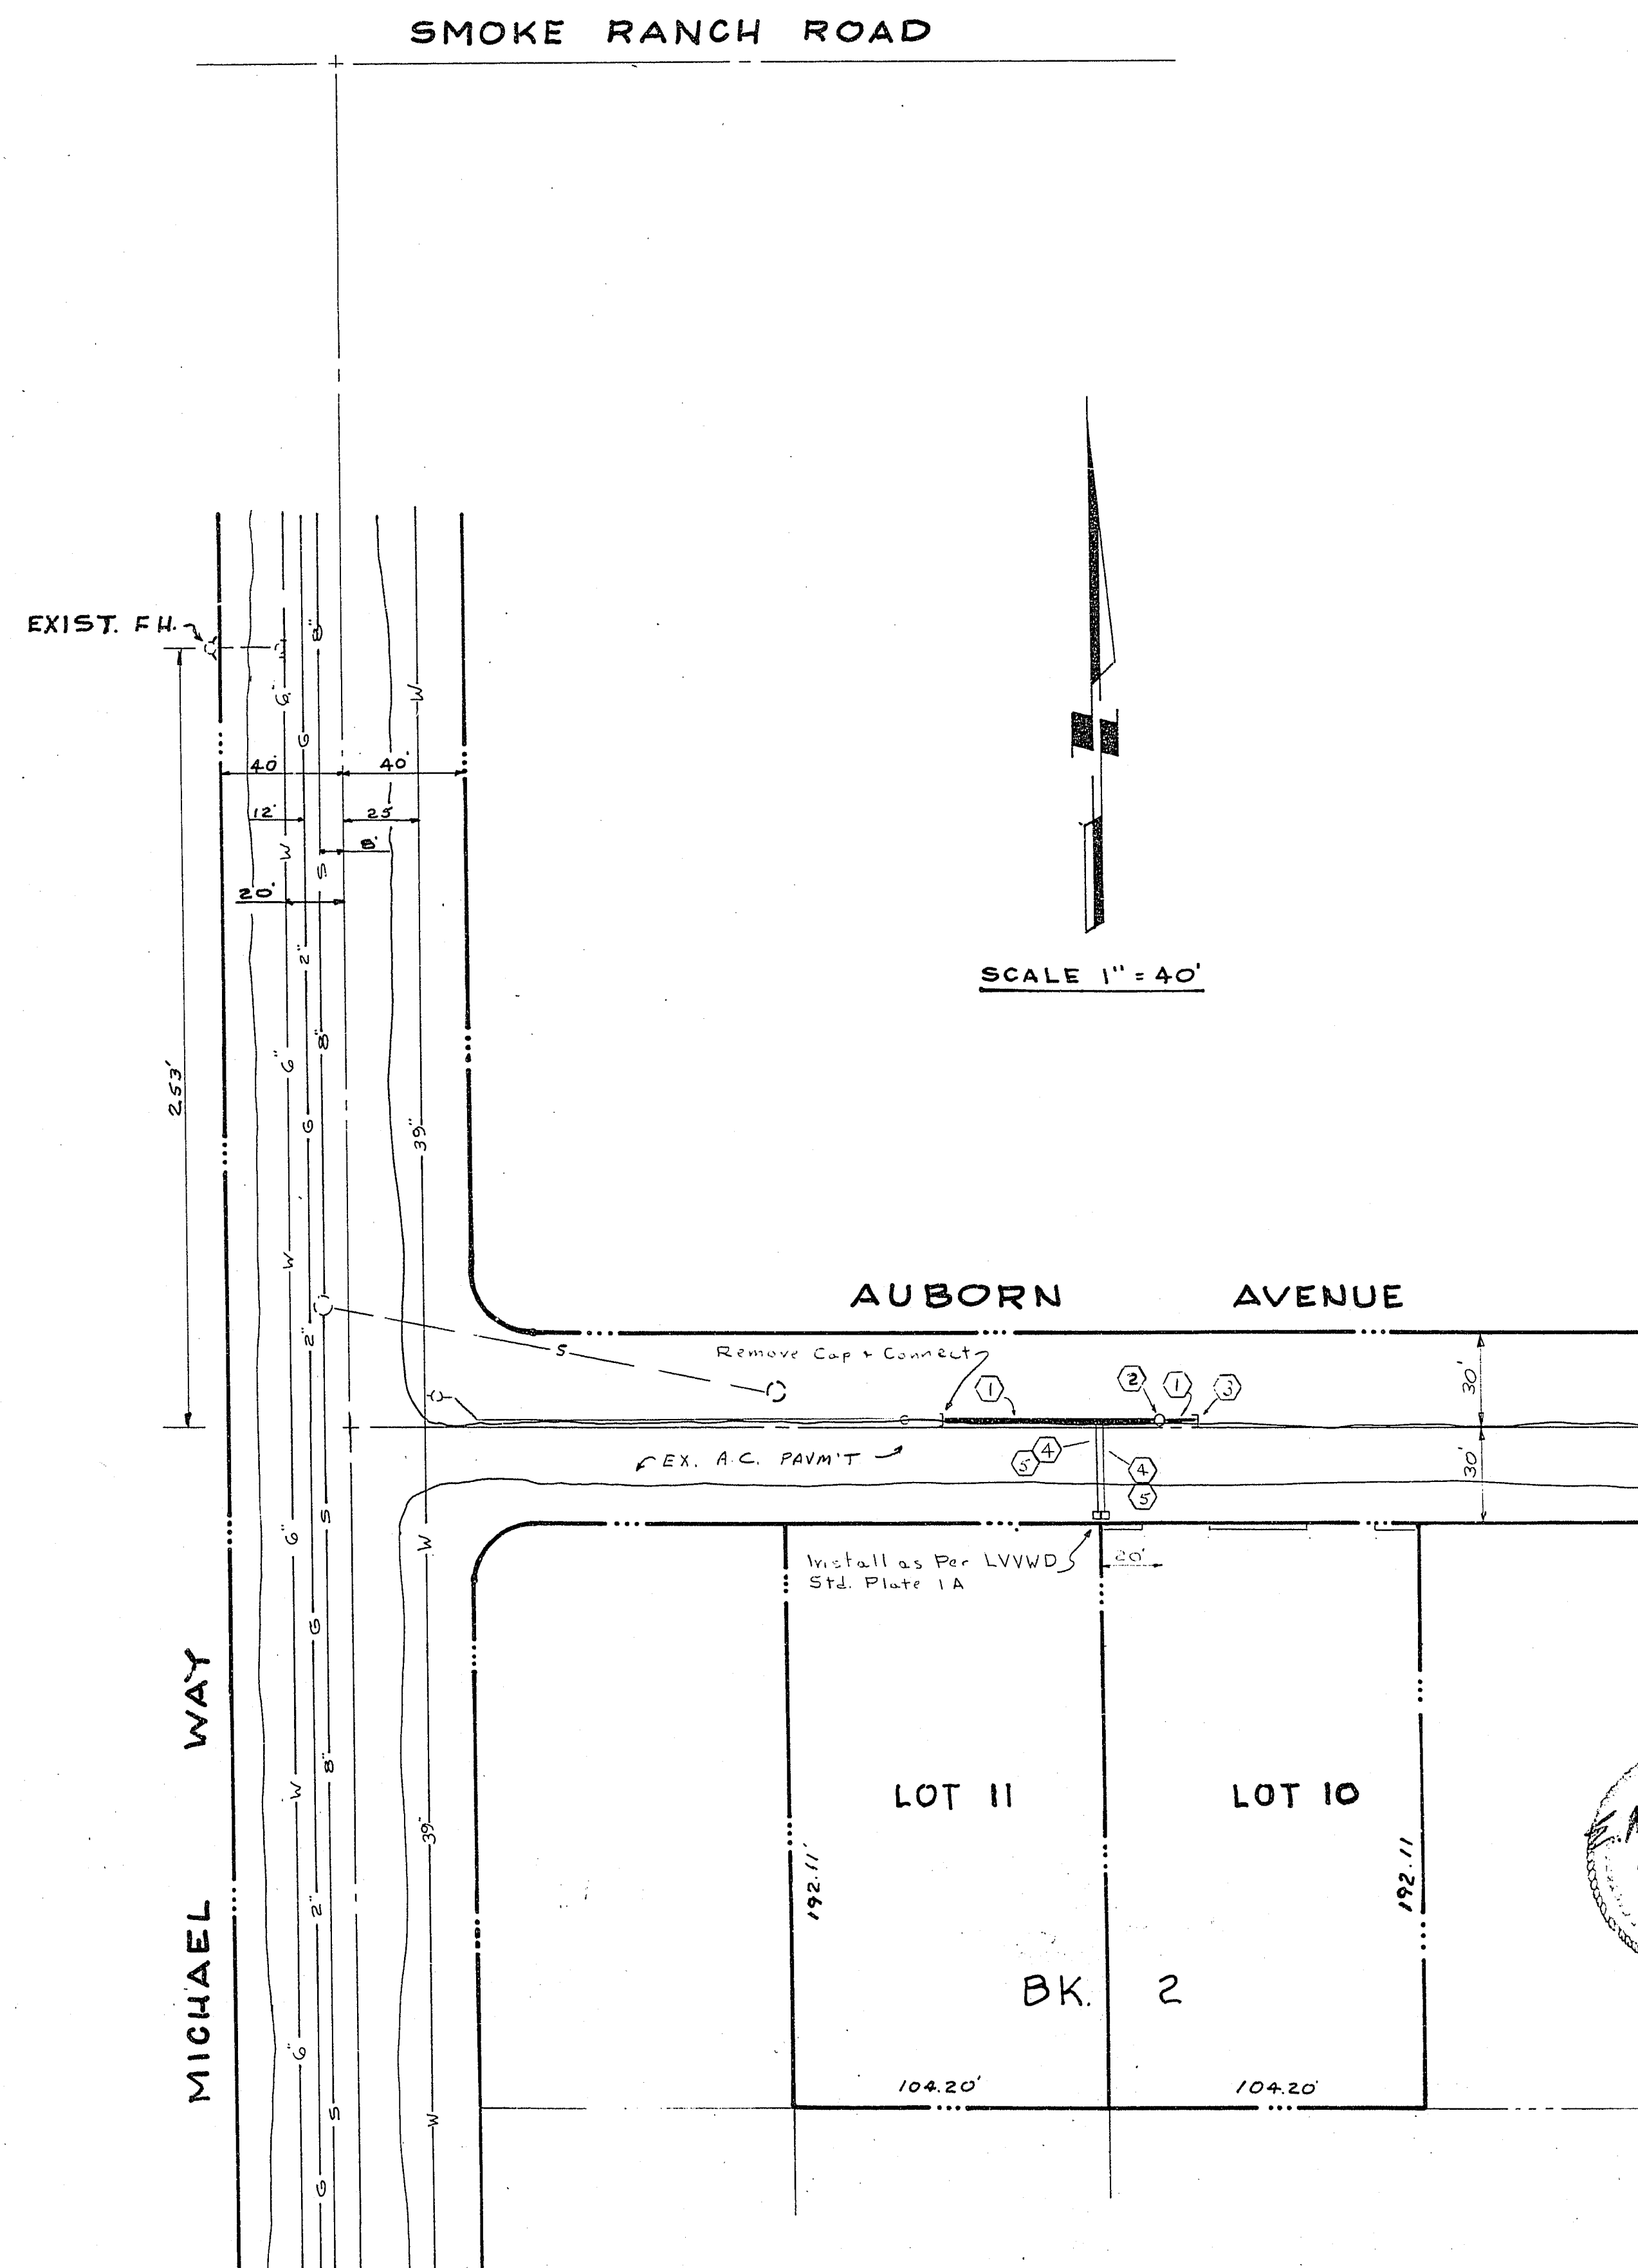

LAS VEGAS VALLEY WATER DISTRICT


1. All work to conform to Las Vegas Valley Water District latest Standard Plates and Specifications.
2. All work, except as modified hereon or by Note No. 1, shall be done in accordance with the most current draft or edition of Uniform Standard Specifications for Public Works Construction Offsite Improvements Clark County area.
3. Notice to be given Engineering Department of the Las Vegas Valley Water District 48 hours prior to actual construction.
4. Service saddles or tapped collars will be required on all 3/4" and 1" service laterals. Service saddles only will be permitted on 1 1/4" and 2" service laterals. Double tapped collars are not permitted.
5. All lines to be pressure tested to 200 psi.
6. Deflection angle shall not exceed 2 1/2 degrees per 13 foot section of pipe for pipe sizes smaller than 14 inches, and shall not exceed 2 degrees for pipe sizes between 14" and 16".
7. All meters shall be located outside of driveways.
8. Detector tape required in accordance with Standard Plate No. 27 where indicated and as follows:
 - A. Over all mains not installed at 6 feet from back of curb.
 - B. Over all service laterals not installed at right angles to mains.
9. Call Before You Dig - 1-800-227-2600.

GENERAL NOTES:

1. Construction shall be in accordance with the Uniform Standard Specifications and Drawings, City of Las Vegas, Nevada, 1978 Edition, and current changes thereto.
2. Existing utilities are located on the plans for the convenience of the contractor only. The contractor shall bear full responsibility for the protection of utilities not shown on the plans, or not in the location shown on the plans. Contractor to verify exact location of utilities prior to construction.
3. Contractor to provide access to private property at all times during construction.
4. All trenching to be done by hand where danger to existing utilities is eminent.
5. All work shall be contained within the rights-of-way or easements as shown on the plans.
6. All trenching shall be in accordance with the Uniform Standard Drawings for Public Works Construction Clark County Area. Drawing No. 551.2.

ESTIMATE OF QUANTITIES

① 6" A.C.P.	83 LF
② 6" GATE VALVE	1 EA.
③ 6" CAP W/2' B.O.	1 EA.
④ 1" P.E. SERVICE LATERAL	2 EA
⑤ 1" METER BY LV.VWD.	2 EA

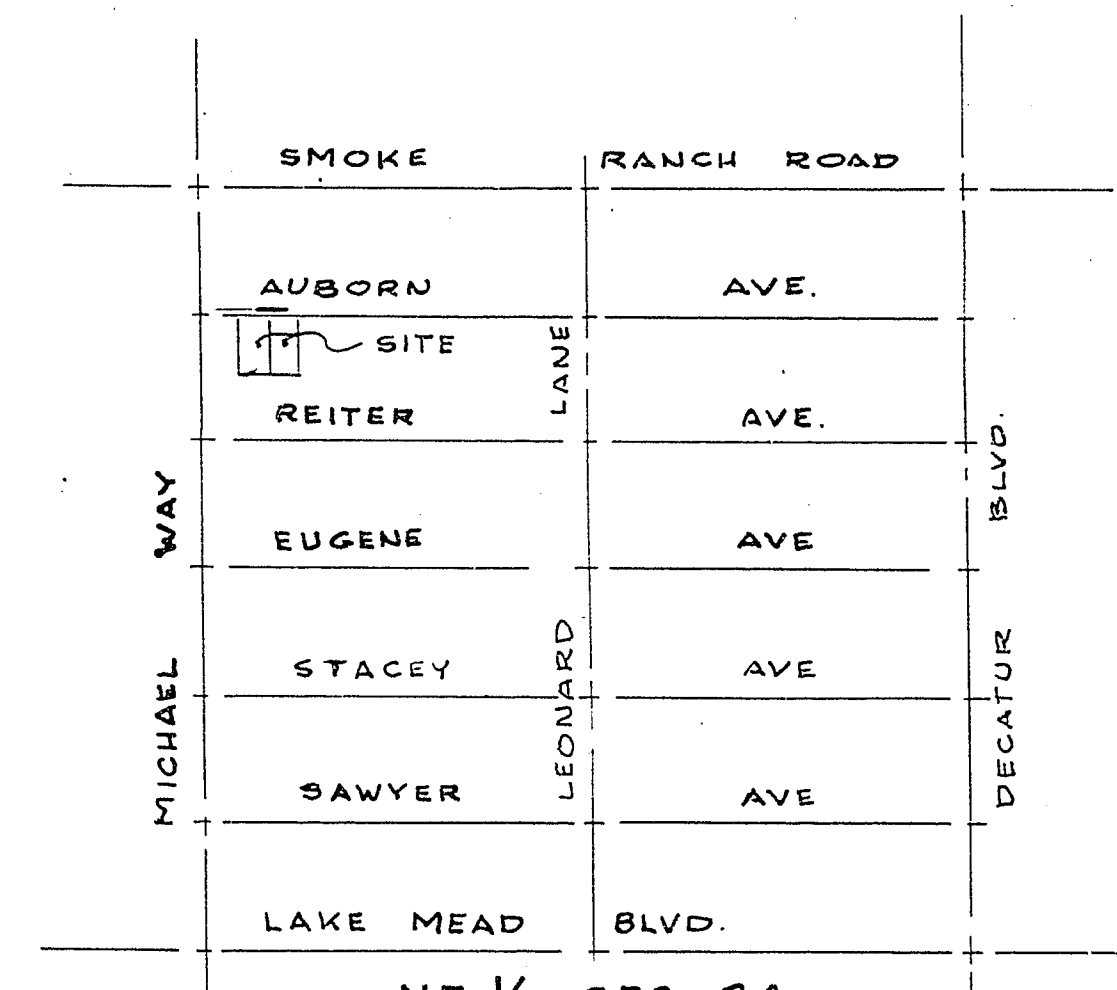

NE 1/4 SEC. 24
T. 20 S. R. 60 S.
VICINITY MAP
NO SCALE

APPROVALS

[Signature] 10-4-85
CLV CITY ENGINEER DATE

[Signature] 10/4/85
CLV QUALITY CONTROL ENGINEER DATE

[Signature] 10/4/85
CLV FIRE MARSHALL DATE

LAS VEGAS VALLEY WATER DIST. DATE
AUBURN AVE. MAIN EXTENSION
Name of Plan EAST OF MICHAEL WAY

Water plan as shown will be acceptable.
It is NOT approved for construction.
[Signature] 10/2/85
LVVWD Date
Avoid cutting underground utility lines. It's costly.

**Call
before you
Dig.**

1-800-227-2600
UNDERGROUND SERVICE ALERT (USA)

AUBORN AVENUE MAIN EXTENSION
EAST OF MICHAEL WAY FOR
DERELL ALLRED & JOHN SHIPP

EMS ENGINEERING
3355 W. SPRING MOUNTAIN RD. - SUITE 242
LAS VEGAS NEVADA 89102
(702)739-9735

565-146