
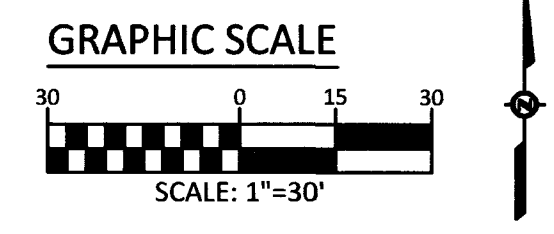


FOR CONTINUATION SEE SHEET C6.02

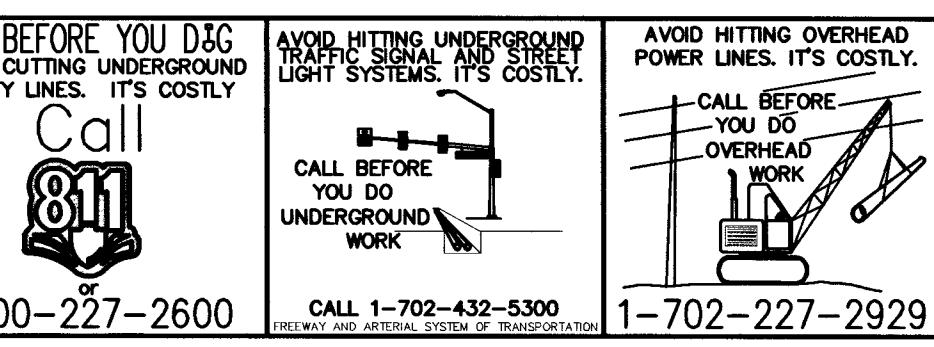


SIGNAGE CONSTRUCTION NOTES

NO.	ITEM USDOCA: UNIFORM STANDARD DRAWINGS CLARK COUNTY AREA.
(1)	INSTALL SIGN R1-1 (STOP) SIGN PER USDOCCA NO. 249.1. SEE SHEET C8.04 FOR SIGN DETAIL.
(2)	INSTALL FIRE LAMP SIGN PER USDOCCA NO. 249.1. SEE SHEET C8.04 FOR SIGN DETAIL.
(3)	INSTALL SIGN R7-8A, R7-8B ADA VAN ACCESSIBLE PARKING SIGN PER USDOCCA NO. 249.1. SEE SHEET C8.04 FOR SIGN DETAIL.
(4)	INSTALL SIGN R3-7R (RIGHT LANE MUST TURN RIGHT) SIGN PER USDOCCA NO. 249.1. SEE SHEET C8.04 FOR SIGN DETAIL.
(5)	INSTALL PEDESTRIAN CROSSING SIGN W11-2 PER USDOCCA NO. 249.1. SEE SHEET C8.04 FOR SIGN DETAIL.
(6)	INSTALL DO NOT ENTER SIGN R5-1 PER USDOCCA NO. 249.1. SEE SHEET C8.04 FOR SIGN DETAIL.
(7)	INSTALL SIGN R3-2 PER USDOCCA NO. 249.1. SEE SHEET C8.04 FOR SIGN DETAIL.
(8)	INSTALL SIGN R7-8 ADA ACCESSIBLE PARKING SIGN PER USDOCCA NO. 249.1. SEE SHEET C8.04 FOR SIGN DETAIL.
(9)	INSTALL SIGN R2-1 (SPEED LIMIT) SIGN PER USDOCCA NO. 249.1. SEE SHEET C8.04 FOR SIGN DETAIL.
(10)	INSTALL SIGN R8-3c (NO PARKING) SIGN PER USDOCCA NO. 249.1. SEE SHEET C8.04 FOR SIGN DETAIL.
(11)	INSTALL SIGN R6-1R (ONE WAY) SIGN PER USDOCCA NO. 249.1. SEE SHEET C8.04 FOR SIGN DETAIL.
(12)	EXISTING W4-2R (LANE MERGE) SIGN TO BE REMOVED. SEE SHEET C8.04 FOR SIGN DETAIL.
(13)	EXISTING R3-7L SIGN (MUST TURN LEFT) TO BE REMOVED. SEE SHEET C8.04 FOR SIGN DETAIL.
(14)	EXISTING W9-3R (MERGE RIGHT) SIGN TO BE REMOVED. SEE SHEET C8.04 FOR SIGN DETAIL.
(15)	EXISTING TRAFFIC SIGN TO BE REMOVED. SEE SHEET C8.04 FOR SIGN DETAIL.
(16)	EXISTING R2-1 (SPEED LIMIT) SIGN TO BE RELOCATED TO STA. 192+82.28. SEE SHEET C8.04 FOR SIGN DETAIL.
(17)	EXISTING R3-4 (NO U-TURN) SIGN TO BE REMOVED. SEE SHEET C8.04 FOR SIGN DETAIL.

STRIPING CONSTRUCTION NOTES	
NO.	ITEM USDOCCA: UNIFORM STANDARD DRAWINGS CLARK COUNTY AREA.
1	INSTALL 4" WHITE PAINTED PARKING STALL LINE, (TYP.)
2	INSTALL 4" WHITE PAINTED LINE @ 45' AT 3' ON CENTER AS SHOWN
3	INSTALL ADA PARKING SPACE MARKINGS PER MUTCD FIGURE 3B.22.
4	INSTALL PAVEMENT MARKINGS AS SHOWN, 8" TALL LETTERING.
5	INSTALL BIKE LANE MARKINGS PER USDOCCA NO. 244.9.
6	INSTALL ADDED TURN LANE PAVEMENT MARKERS PER USDOCCA NO. 246. SEE SHEET C6.04 FOR DETAIL A.
7	INSTALL 6"x2" SKIP WHITE LINE PER USDOCCA NO. 244.9.
8	INSTALL 6" SOLID WHITE LINE PER USDOCCA NO. 244.9.
9	INSTALL 8" STORAGE LINE PER USDOCCA NO. 246.
10	INSTALL TYPE 4 LANE LINE PER USDOCCA NO. 244.1.

TRAFFIC CONSTRUCTION NOTES	
NO.	ITEM USDOCA: UNIFORM STANDARD DRAWING CLARK COUNTY AREA
①	INSTALL NO. 3 $\frac{1}{2}$ " PULL BOX PER USDOCCA DWG NO. 326.
②	INSTALL 2" STREETLIGHT CONDUIT WITH (2) #4 AND (1) #6 WIRES PER USDOCCA DWG NO. 404.1419.
③	INSTALL 3" PVC FAST CONDUIT PER USDOCCA 623 G.03.01.
④	INSTALL S/LT PER USDOCCA DWG NO. 314, 320 and 321, AND DETAILS 'A' AND 'B' SHEET C8.04.
⑤	INSTALL T200 PULLBOX PER USDOCCA DWG NO. 762.

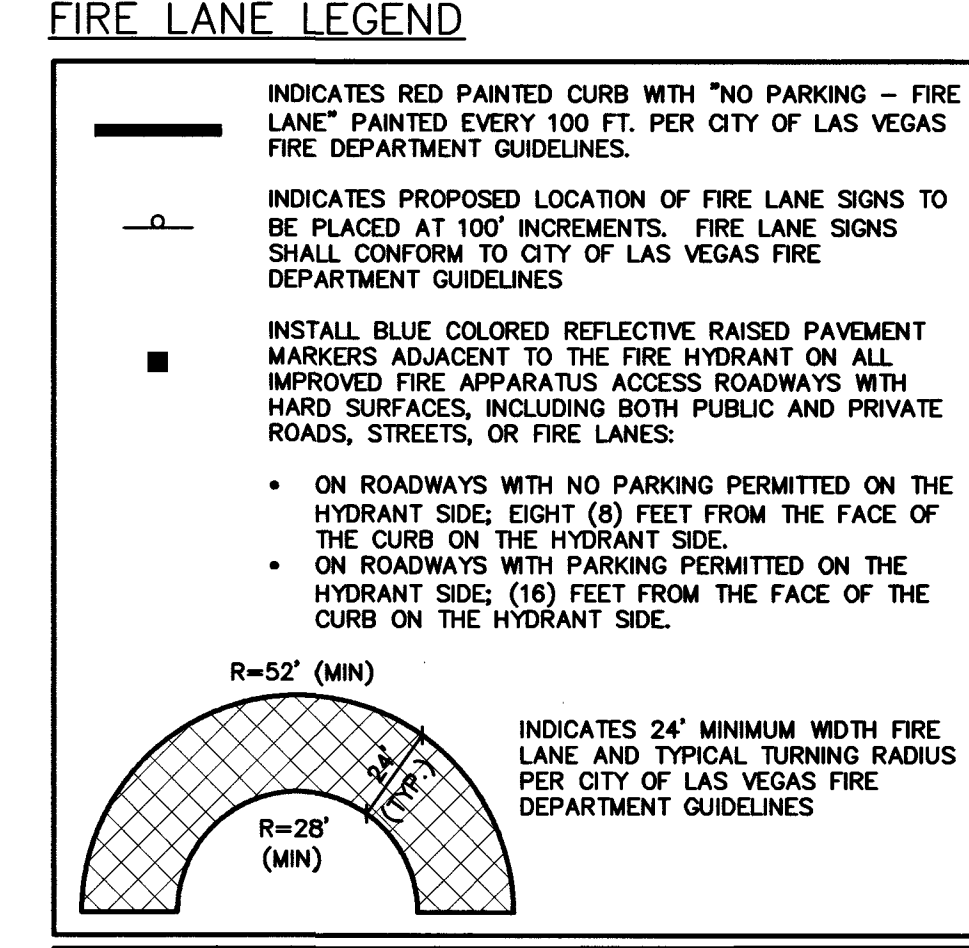

<i>JK Smith</i>		<i>10/6/16</i>
LAS VEGAS FIRE & RESCUE		DATE
<u>NOTE:</u>		
OWNER RESPONSIBLE TO PROVIDE SURVEY MONUMENTATION AS REQUIRED AND TO REPLACE ALL SURVEY MONUMENTATION DAMAGED, DISTURBED, DESTROYED OR OBSCURED DURING CONSTRUCTION.		
<u>NOTE:</u>		
PROPOSED STREET LIGHTS WILL BE ADDED TO EXISTING 200 AMP SERVICE PEDASTAL (STA: 204+66.07) LOCATED ON TULE SPRINGS. SEE SHEET C6.04 FOR STREETLIGHT CIRCUIT CALCULATION.		

[illegible]