



Job Location:						Narrative/Special Remarks			
 NOTE: NVE MUST REMOVE THEIR FACILITIES BEFORE CTL REMOVE THE POLES. ELKHORN RD DONALD RD WORK SITE FUTURE DEVELOPMENT DREAMY DUSK CT PARADISE ENCORE ST DORRELL LN N DECATUR BLVD THOM BLVD T23279, T73451, T23280, T26647, T29612, T23283, T19634, T19635, T19636						DECATUR & DONALD, OVERHEAD POLE REMOVAL. -REMOVE 25PR CABLE & TERMINAL. -REMOVE POLES T19634, T19635 & T19636.			
						Developer Contact:			
						Held Order Information			
						Service Order #:		Customer Terminal:	
						Customer Name:		Cable Assignment: F1: F2:	
Customer Address:		Cross Connect:							
Misc. Information									
List all associated projects:		Right of Way							
		State Permit							
		County Permit							
		City Permit							
Site Location ID (BVAP) #:		Additional Permit Information:							
FW Contracts:		Trench Open Date:							
		Cut Sheets:							
		RZ							
		CZ							
		Notify Conversation Number:							
DATE		REVISIONS							
									
EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF CENTURYLINK BEING ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN PERMISSION.									
EXCHANGE KEY	REMOTE SWITCH EXCHANGE KEY	COMMUNITY NAME	ENGINEERING CONTACT	CONTRACT ENGINEER	CONSTRUCTION COORDINATOR	REVISION:	DESC: DECATUR & DONALD, OVERHEAD POLE REMOVAL		
NORTH 5		NAME: N5 NLVG CITY:	NAME: WILLIE DAVIDSON PHONE: 702 244 8289	NAME: RAFAEL GONZALES COMPANY: Outsource-Inc.	NAME: STACIE BOOTH PHONE: 702 244 7830	SECTION:	WC CLI: LSVGNVXU	PROJECT#: N.308147	
						TOWNSHIP:	WFMT PROJECT #:		
						RANGE:	SCALE:	DATE: 10/18/17	SHEET: 1 OF 3

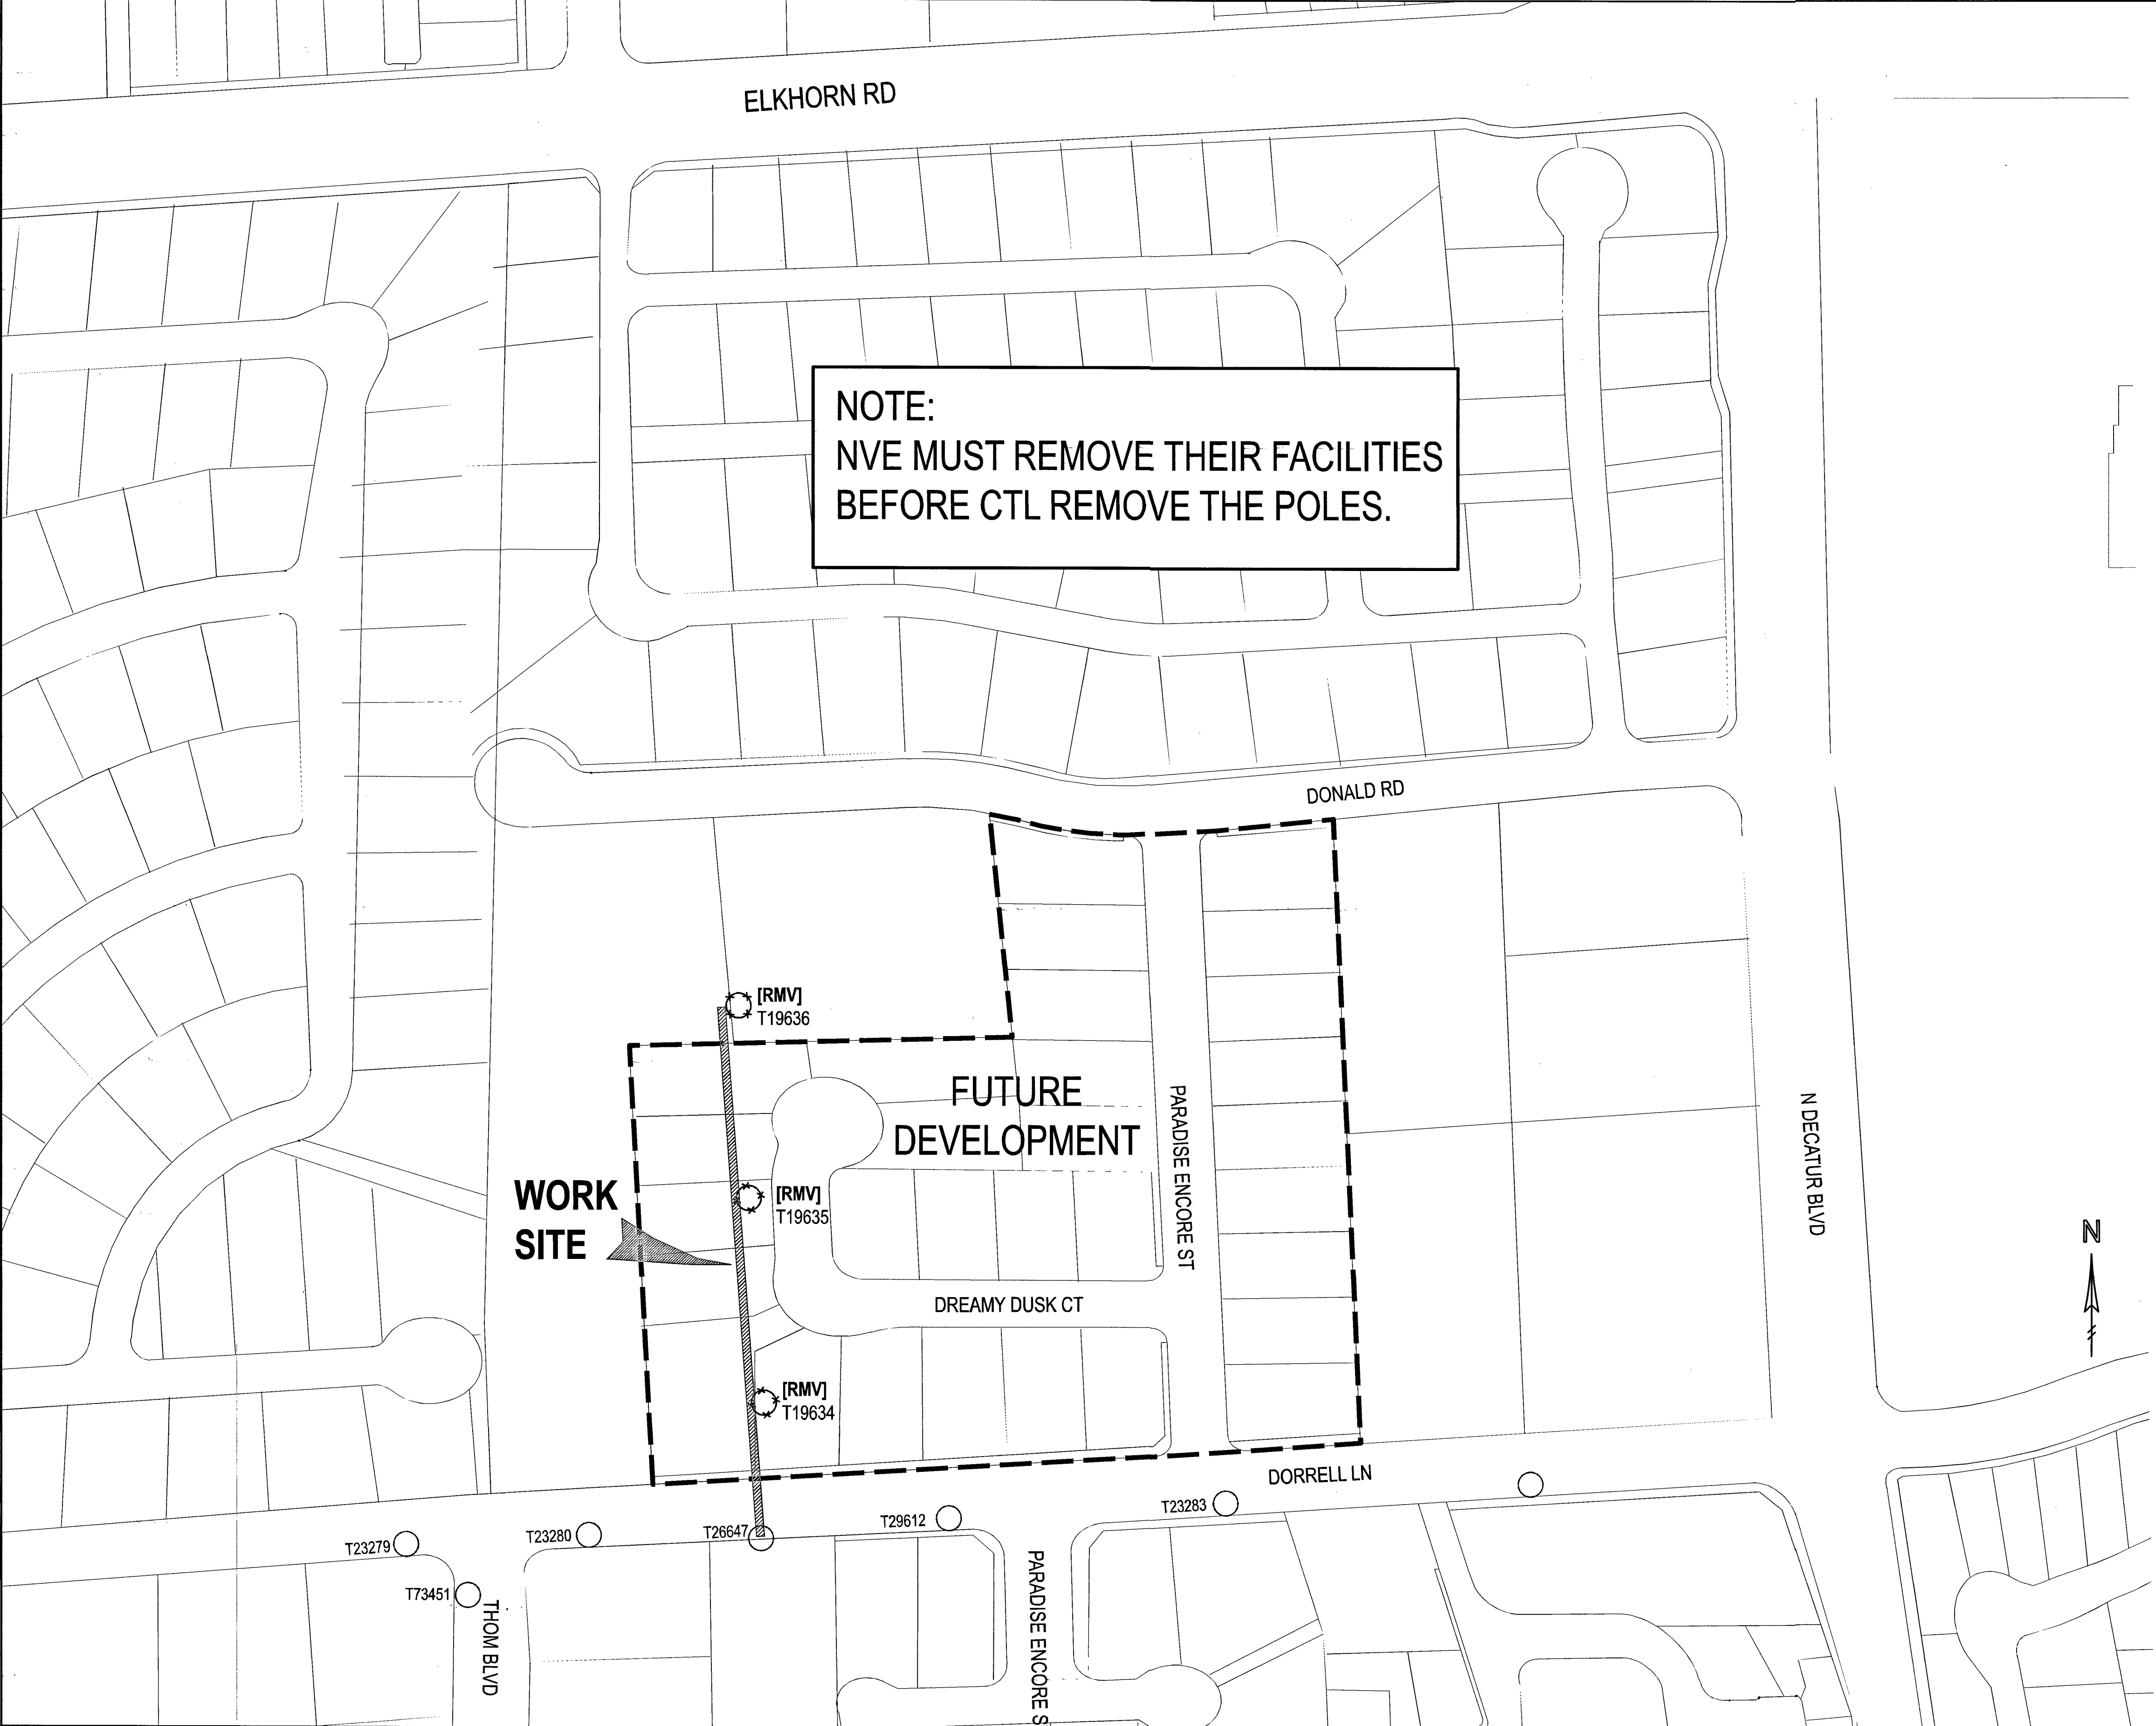

EXCHANGE KEY		ENGINEERING CONTACT		CONTRACT ENGINEER		REVISIONS		PROJECT#: N.308147		DATE: 10/18/2017	
NORTH 5		NAME: WILLIE DAVIDSON		NAME: RAFAEL GONZALES		DATE	DESCRIPTION	WFMT PROJECT:			
REMOTE SWITCH EXCHANGE KEY		PHONE: 702 244 8289		COMPANY: Outsource-Inc.				DESC: DECATUR & DONALD OVERHEAD POLE REMOVAL			
		COMMUNITY NAME		CONSTRUCTION COORDINATOR				WC CLLI:		TOWNSHIP:	
		NAME: N5 NLVG		NAME: STACIE BOOTH				SECTION:		RANGE:	
		CITY:		PHONE: 702 244 7830				REVISION:		SCALE:	
										SHEET: 3 OF 3	

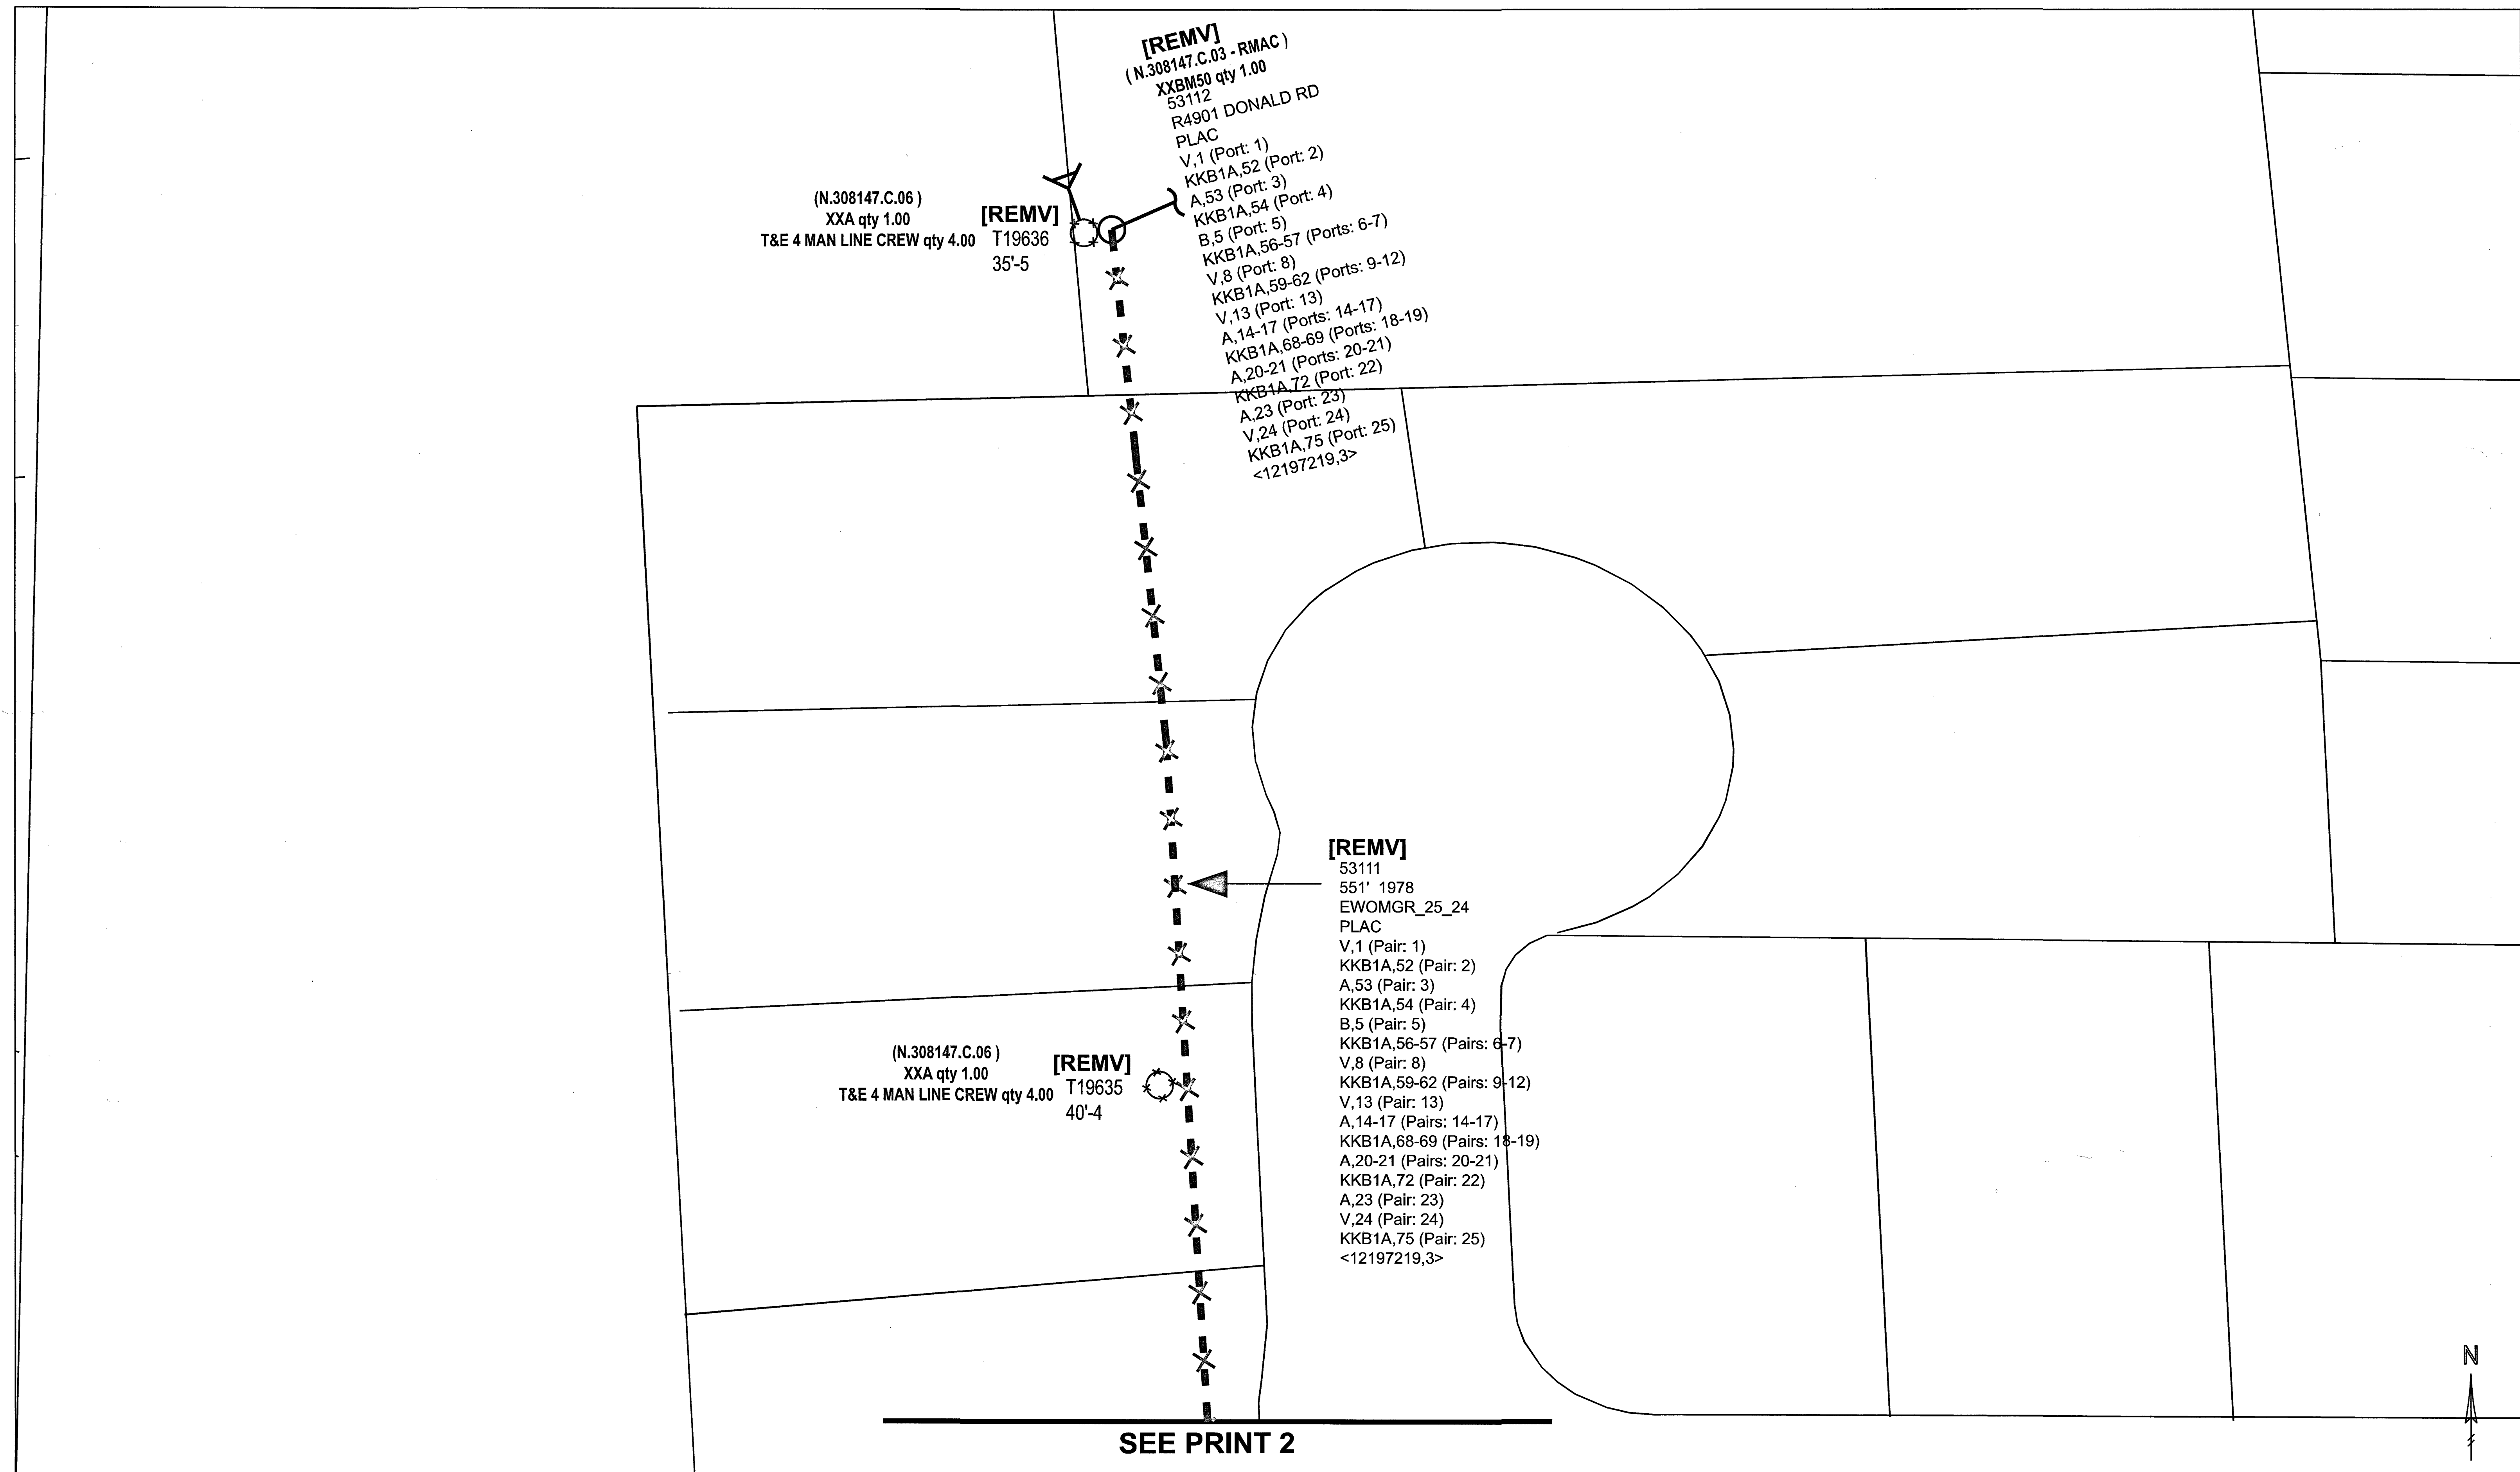

EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF CENTURYLINK BEING ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN PERMISSION.

GENERAL NOTES:

ANY NOTES LOCATED IN DRAWING AREA TAKE
PRECEDENCE OVER STANDARD NOTES.

REFER TO A CURRENT NVEnergy ELECTRIC SERVICE REQUIREMENTS
HANDBOOK FOR FURTHER CLARIFICATION OF NVEnergy STANDARDS.

THE APPLICANT SHALL INFORM THE INSPECTOR AT LEAST 48
HOURS BEFORE COMMENCING ANY ITEM OF CONSTRUCTION OR
INSTALLATION OF MATERIAL TO ENABLE PROPER INSPECTION OF
MATERIALS AND WORKMANSHIP. MAIN TRENCH WIRE PULLS TO BE
SCHEDULED 72 HOURS IN ADVANCE OF INSTALLATION. APPLICANT'S
PROJECT WILL NOT BE SCHEDULED UNTIL FINAL APPROVAL FROM
NVEnergy UNDERGROUND & ELECTRICAL INSPECTORS.

ALL WORK SHALL BE ACCOMPLISHED IN STRICT ACCORDANCE WITH
THE SPECIFICATIONS SET FORTH IN THE ELECTRIC SERVICE
REQUIREMENTS HANDBOOK, AS CURRENTLY ADOPTED BY NVEnergy.
THE CONTRACTOR SHALL SECURE COPIES OF THE AFOREMENTIONED
CONSTRUCTION SPECIFICATIONS ON HIS OR HER OWN BEHALF.

SYMBOLS ARE NOT TO SCALE AND DO NOT NECESSARILY
REPRESENT ACTUAL LOCATIONS OF FACILITIES.

THIS DRAWING ILLUSTRATES DATA COLLECTED FROM VARIOUS
SOURCES AND MAY NOT REPRESENT A SURVEY OF THE PREMISES.

APPLICANT SHALL FIELD DETERMINE POSITION AND DEPTH OF
EXISTING UTILITY EQUIPMENT PRIOR TO COMMENCING
CONSTRUCTION.

USE CAUTION PRIOR TO EXCAVATION. CHECK TO ENSURE
ADDITIONAL DEPTH IS NOT REQUIRED TO ACCOMMODATE GAS
AND/OR WATER FACILITIES AND DRAINAGE CHANNELS.

CALL NVEnergy UNDERGROUND INSPECTORS 48 HOURS PRIOR TO
START OF CONSTRUCTION FOR TRENCH INSPECTION BEFORE
COVERING TRENCH.

ALL NVEnergy CABLE TO BE INSTALLED BEHIND CURB, UNLESS
OTHERWISE STATED.

APPLICANT IS RESPONSIBLE FOR STAKING OF PROPERTY CORNERS
& ELEVATIONS.

ALL HANDHOLES AND PULLBOXES SHALL BE INSTALLED TO
FINISHED GRADE OR 6" ABOVE IF GRADE IS NOT ESTABLISHED.

ANY SUBSTRUCTURE VAULT INSTALLED IN GRAVEL, GRASS, OR BARE
GROUND WILL REQUIRE A CONCRETE 8" WIDE AND 6" DEEP
COLLAR AROUND BOX IN ACCORDANCE TO RS-G6.

2" PLASTIC CONDUIT BENDS (90°, 45°) WITH 36" MIN. RADIUS.
(USE FIBERGLASS IF CONDUIT LENGTH IS OVER 500')

3" & 4" PLASTIC CONDUIT BENDS (90°, 45°) WITH 36" MIN.
RADIUS.
(USE RGS IF CONDUIT LENGTH IS OVER 100')

6" PLASTIC CONDUIT BENDS (90°, 45°) WITH 48" MIN. RADIUS.
(USE RGS IF CONDUIT LENGTH IS OVER 100')

WHEN INSTALLING CONDUIT IN FIELD, USE APPROPRIATE BENDS TO
COMPLETE THE INSTALLATION.

DEFLECTION OF CONDUIT BENDS AND CONDUIT NOT TO EXCEED
NVEnergy STANDARDS.

EXISTING STUB-OUT/CONDUIT INSTALLED BY PREVIOUS CONTRACTOR
/ DEVELOPER. NVEnergy DOES NOT GUARANTEE LOCATION, LENGTH,
OR ACCESSIBILITY OF EXISTING STUB-OUT/CONDUIT. IF UTILIZING
ANY PORTION OF EXISTING CONDUIT, IT MUST BE MANDRELED
PRIOR TO FINAL RELEASE.

PREVIOUSLY MANDRELED CONDUIT WHICH HAS BEEN IN THE
GROUND FOR OVER 6 MONTHS MUST BE RE-MANDRILLED PRIOR
TO FINAL RELEASE.

WHEN NVEnergy FACILITIES ARE TO BE REMOVED, NVEnergy WILL
REMOVE ALL WIRES AND EQUIPMENT. NVEnergy IS NOT
RESPONSIBLE FOR THE REMOVAL OF CONDUIT RUNS OR
SUBSTRUCTURES FROM THE PROPERTY.

NO COVERED PARKING IN FRONT OF EQUIPMENT.

ALL CONSTRUCTION AND MATERIALS SHALL BE IN ACCORDANCE
WITH THE "UNIFORM STANDARD SPECIFICATIONS FOR PUBLIC WORKS
CONSTRUCTION OFF-SITE IMPROVEMENTS, CLARK COUNTY AREA
NEVADA", LATEST ISSUE; THE "UNIFORM STANDARD DRAWINGS FOR
PUBLIC WORKS CONSTRUCTION, CLARK COUNTY AREA NEVADA",
LATEST ISSUE; AND OTHER APPLICABLE APPROVED STANDARDS
ISSUED BY THE CONTROLLING AGENCY; ALL LOCAL CITY CODES
AND ORDINANCES APPLICABLE.

CIVIL LINETYPE LEGEND

CENTERLINE	---	---
PROPERTY LINE/ROW	---	---
CURB	---	---
EDGE OF PAVEMENT	---	---
EDGE OF SIDEWALK	---	---
SEWER LINE	---	---
WATER LINE	---	---
COHW WATER LINE	---	---
LVWD WATER LINE	---	---
SNWA WATER LINE	---	---
GAS LINE	---	---
TELEPHONE LINE	---	---
CABLE TV LINE	---	---
CABLE TV LINE	---	---
STORM DRAIN LINE	---	---
FIRE HYDRANT	---	---
SIGNAL LIGHT	---	---
STREET LIGHT	---	---

CONSTRUCTION / INSPECTION REQUIREMENTS

WORK MUST CONFORM TO NVE ELECTRIC SERVICE STANDARDS, AVAILABLE AT:
www.nvenergy.com/business/newconstruction/newconstruction5/servicesstandards.cfm

NVE INSPECTOR MUST BE PRESENT TO INSPECT TRENCHING (SCHEDULE AT LEAST 72
HOURS IN ADVANCE) AT EACH OF THE FOLLOWING STAGES:
1. BOTTOM SAND AND CONDUIT INSTALLED
2. TOP SAND INSTALLED
3. BACKFILL INSTALLED

CONDUIT MUST BE MANDRILLED PRIOR TO RELEASE (COORDINATE WITH INSPECTOR).
NVE STAND BY CREW IS REQUIRED WHEN WORKING AT AN ENERGIZED VAULT OR
TRANSFORMER. CALL STAND BY NUMBER (SEE TITLE BLOCK) TO SCHEDULE.

NVE ELECTRICAL INSTALLATION WILL NOT BE SCHEDULED UNTIL AFTER THE NVE
INSPECTOR HAS COMPLETED THE OFFICIAL RELEASE.

METER(S) WILL NOT BE SET UNTIL ALL OF THE FOLLOWING ARE COMPLETE:
• [INSTRUMENT-RATED ONLY] METERING EQUIPMENT HAS BEEN SUBMITTED TO NVE
METERING ENGINEER AND APPROVED. (submittals_southern@nvenergy.com)
• APPLICATION FOR METER SET HAS BEEN SUBMITTED TO NVE'S NEW DEVELOPMENT
CENTER. FORM AVAILABLE AT:
www.nvenergy.com/brochures_arch/new_construction/meter_set.pdf
• THE LOCAL BUILDING AUTHORITY HAS INSPECTED AND APPROVED THE METERING
EQUIPMENT.
• METERING EQUIPMENT IS ACCESSIBLE AND CLEARLY IDENTIFIED WITH PERMANENT
MARKINGS. ADDRESSES, SUITE NUMBERS, AND STREET SIGNS ARE POSTED IN
PERMANENT LOCATIONS (SEE RPI-G).

TRACK PROJECT STATUS ONLINE WITH NVE'S DEVELOPER DASHBOARD:
www.nvenergy.com/business/newconstruction/newconstruction5/developerdashboard.cfm

NOTICE:

THIS EXHIBIT IS THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF
NV ENERGY AND MAY NOT BE USED, REPRODUCED OR
DISTRIBUTED WITHOUT THE EXPRESSED, WRITTEN APPROVAL OF NV
ENERGY.


THE IMAGES HEREON ARE NOT ORTHOPHOTOGRAPHIC. ANY
LOCATIONS DEPICTED HEREON ARE APPROXIMATE ONLY. THIS
EXHIBIT WAS CREATED FOR GENERAL PRESENTATION AND
DISCUSSION PURPOSES ONLY AND IS NOT PURPORTED TO
REPRESENT ANY MEASURE OF ACCURACY. THIS EXHIBIT IS NOT TO
BE UTILIZED IN ANY MANNER NOT CONSISTENT WITH THE INTENT
OF ITS' CREATION AS STATED ABOVE.

SOURCE	PH.	EX: KVA	ADDED KVA	TOTAL KVA	LOOP
U12730	A	1199.7	-75	1124.7	
N/A	B	1135	0	1135	
SKL1210	C	0	0	0	



T,R,S: 19-60-24

APN: 12524503001

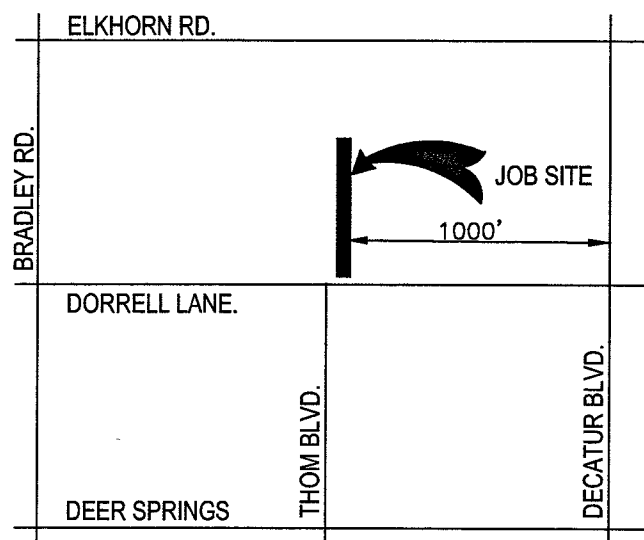


VICINITY MAP

(NOT TO SCALE)

EVERY EFFORT HAS BEEN MADE TO IDENTIFY ALL NVE
FACILITIES. THE CUSTOMER SHALL CONFIRM THE EXISTENCE
AND LOCATION OF THESE FACILITIES.

AVOID HITTING OVERHEAD
POWER LINES. IT'S COSTLY.

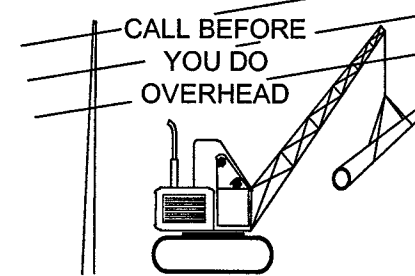

CALL 1-702-402-2929

Call before you Dig
Avoid cutting underground
utility lines. It's costly.



OR
1-800-227-2600
AND CLARK COUNTY TRAFFIC OPERATIONS
1-702-455-6000

REVISIONS

NO.	DESCRIPTION	DATE	G.A.
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			

STANDARD

PROJECT PURPOSE:

REMOVAL OF POLES T19634, T19635 AND T19636

EXHIBIT 'A'

NVEnergy INFORMATION:

COORDINATOR: STATION, STEVEN
PHONE: 702-332-9107
DESIGNER: YOSEF, NEAL D.F. J.M.
DCA: N/A
INSPECTOR: 402-3008
STAND BY: 402-4114, 402-4117, 402-4118
DISTRICT: LAS VEGAS NORTH

JPA INFORMATION:

JPA ADMIN PHONE: 702-402-6741 JPA#: P201214745

CUSTOMER INFORMATION:


APPLICANT: BEAZER HOMES HOLDINGS LLC
ENGINEER: N/A
CONTACT: DAVE WAGNER ** 702-376-0526
APPROVAL DATE: 10/16/2017
GOVERNMENT INFORMATION:
AGENCY: CITY OF LAS VEGAS
APPROVAL DATE: N/A

FOR EACH SERVICE POINT (POINT OF DELIVERY), ENERGY FOR
EACH TENANT SPACE WILL BE MEASURED THROUGH ONE
WATTHOUR METER. ENERGY FOR ALL NON-TENANT SPACE WILL
BE MEASURED THROUGH ONE WATTHOUR METER. CONTACT NVE
METER OPERATIONS FOR MULTIPLE RATE CLASS INSTALLATIONS.



DECATUR AND DONALD
OVERHEAD POLE REMOVAL
DORRELL / THOM

PROJ. ID: 3002028137 SCALE: 1" = 30'
SHEET # 1 OF 1 DATE: 10/04/2017

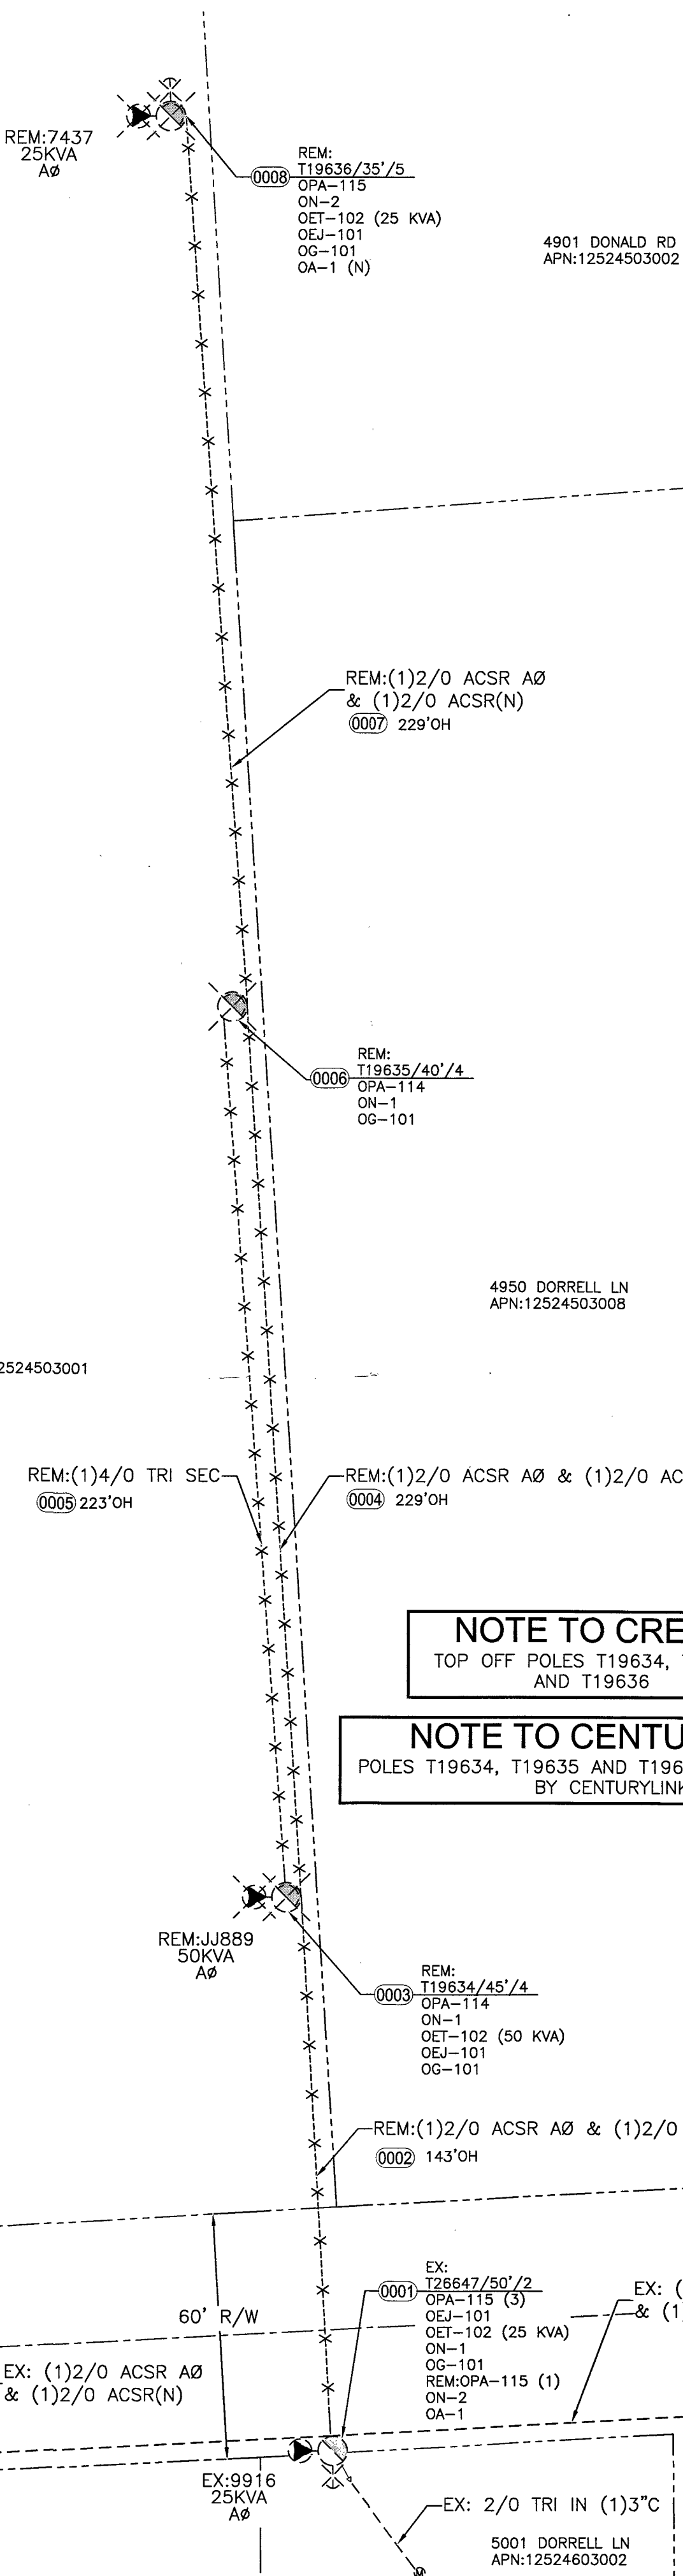

NOTE TO CREW:

TOP OFF POLES T19634, T19635
AND T19636

NOTE TO CENTURYLINK:

POLES T19634, T19635 AND T19636 TO BE REMOVED
BY CENTURYLINK.

!!!! CAUTION !!!!

ENERGIZED CABLES...
CALL BEFORE YOU DIG

NOTE: ALL THE ABOVE GROUND UTILITY APPURTENANCES
SHALL CONFORM TO THE REQUIREMENTS OF CLV UNIFIED
DEVELOPMENT CODE TITLE 19.06 AND 19.08

APPROVED FOR CONSTRUCTION

THIS APPROVAL IS FOR WORK IN CLV R/W & EASEMENT
ONLY. OBTAINING PERMISSIONS OR EASEMENTS FOR WORK
SHOWN ON PRIVATE PROPERTY IS THE RESPONSIBILITY
OF THE UTILITY.

APPROVAL BY: L17-00646-U001 10750607-1-VTL DATE: 11 29 17

CITY OF LAS VEGAS
PERMIT REQUIRED*

CONTACT CLV LAND DEVELOPMENT (229-6371)
CLV CONSTRUCTION SERVICES MUST BE NOTIFIED
24 HOURS PRIOR TO COMMENCING CONSTRUCTION
(229-6337)

HANSEN

DATE

*NVE INSPECTOR MUST BE NOTIFIED BY FAX 48
HOURS PRIOR TO COMMENCING CONSTRUCTION &
WILL VERIFY CITY PERMIT FOR WORK DONE IN
STREETS OR SIDEWALK.
FAX PERMIT TO:
LAS VEGAS NORTH (RYAN CENTER): 402-4354
LAS VEGAS SOUTH (BELTWAY CENTER): 402-6864