





INDEPENDENT USE JOINT MOUNTING
WITH INTERSTATE SHIELDS

MI-2



M6-1(N) (S) (E) OR (W)
(I) M6-1(N) (S) (E) OR (W)


NOTE: Use black symbol and border on reflectorized white background; except when these signs have the prefix (I) and then they shall have a reflectorized white symbol and border and a reflectorized blue background with the margin eliminated.




W1-6




W3-1

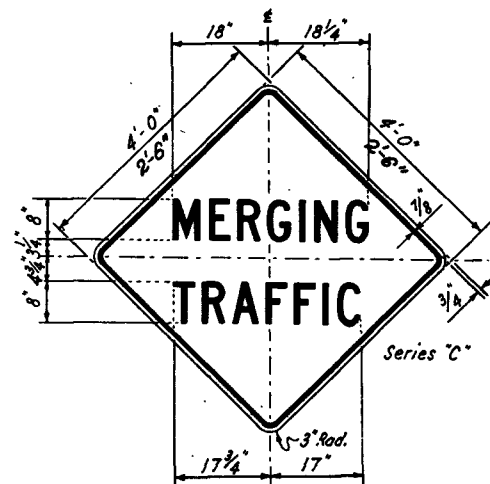


W4-1

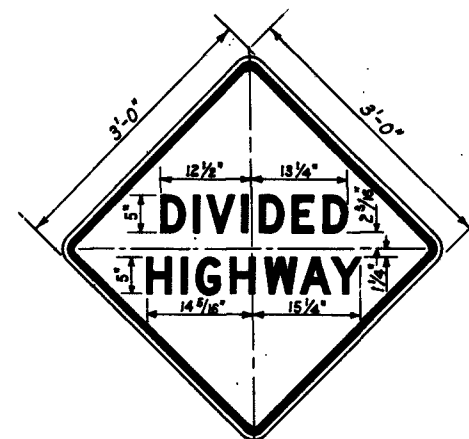


W6-1

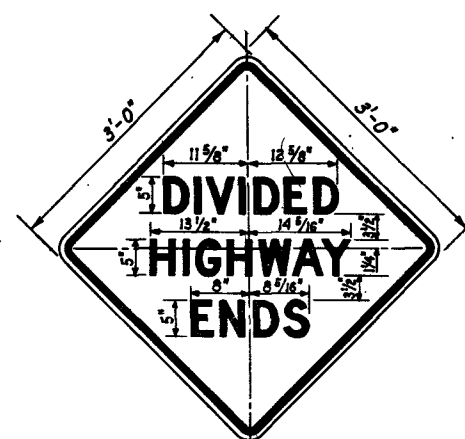

W6-2

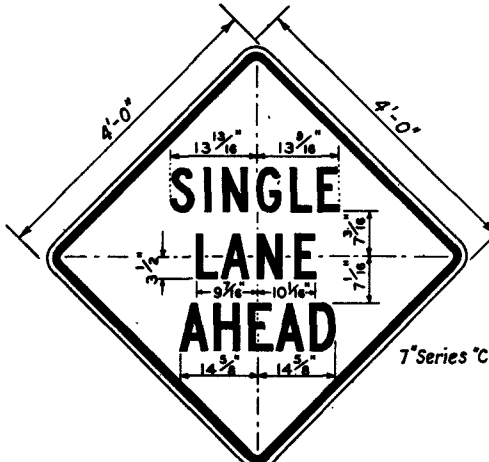


W20-6D

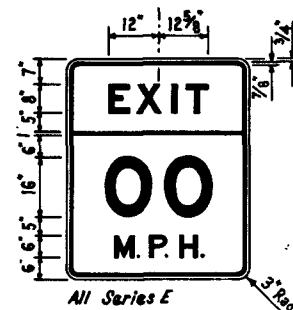


W-52



W-53
(See General Note 12)

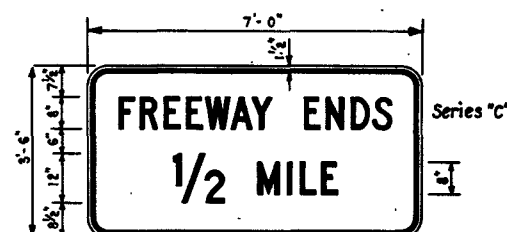


W-54
(See General Note 12)

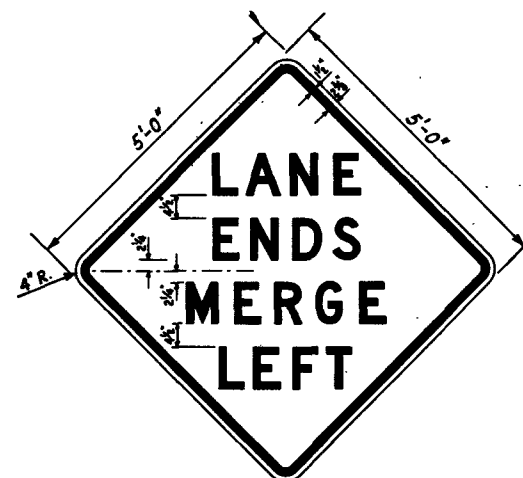

W55-L


GENERAL NOTES

- Design Specifications: In accordance with A.A.S.H.O. Manual for Signing and Pavement Markings, of the National System of Interstate and Defense Highways, and Manual on Uniform Traffic Control Devices for Streets and Highways.
- Letters and numerals shall conform to Standard Alphabets of the Bureau of Public Roads or as modified.
- All Guide (G) Signs except G-8, G-9 and G-9A shall have reflectorized white letters, numerals and border on reflectorized blue background. Signs G1-B, G4-A and E1-1 arrow angles to be set in field at erection. Use Type A Arrows unless otherwise noted in Sign Detail List.
- G-9 and G-9A: Reflectorized white letters, numerals and border with red and blue reflectorized background as indicated.
- G-8, M1-2 and other U.S. Route Markers: Black letters, numerals and border on reflectorized white background.
- E-4 and E1-1: Reflectorized white letters, numerals, arrows and border on reflectorized green background.
- All Regulatory (R) Signs except R1-1, R1-2 and R-11 shall have black letters, numerals and border on reflectorized white background.
- R1-1 and R-11: Reflectorized white letters and border on reflectorized red background.
- All Warning (W) Signs and R1-2 shall have black letters, numerals and border on yellow reflectorized background.
- For detail drawings of Regulatory (R) and Warning (W) Signs see Bureau of Public Roads manual entitled "Standard Highway Signs" as specified in the manual on Uniform Traffic Control Devices 1961.
- See Sign Detail Sheets for correct numerals on Signs E-4, G-1, G-2, G-2A, G-8, G-9, G-9A and M1-2.
- W-53 and W-54: Mountings shall be as specified on Construction Sign Drawing No. 1018, Typical Sign Erection Multiple Post.




LETTER SIZE	ARROW DIMENSIONS IN INCHES						
	a	b	c	d	e	f	r
10" cap.	15 1/8	11 1/8	3 3/4	5	1 5/8	2 1/4	1 3/16
13 1/2" u.c., 10" 12" cap.	18 1/4	14	4 1/2	6	1 1/2	2 3/4	3/4
16" u.c.	22 1/4	17	5 3/4	7 1/2	1 3/4	3 5/8	1

*Recommended dimensions. Taper should be held constant for longer or shorter shaft lengths.



LETTER SIZE	ARROW DIMENSIONS IN INCHES						
	a	b	c	d	e	f	r
8" 10" cap.	14 1/4	9 1/4	3 3/4	4 1/2	1 5/8	1 7/4	3/4
13 1/2" u.c., 12" cap.	17 1/2	11 3/4	4 3/4	5 3/4	1 1/2	2 3/4	7/8
16" u.c.	21 1/4	14 1/4	5	6 3/4	1 3/4	2 5/8	1



C VERTICAL DOWN ARROW

STANDARD ARROWS

STATE OF NEVADA
DEPARTMENT OF HIGHWAYS

STANDARD 122
GROUND-MOUNTED SIGNS

APPROVED: *Orin W. Walker*

59356