



FED ROAD DIV NO	STATE	PROJECT NO	COUNTY	CONTROL SECTION	STATE ROUTE	SHEET NO.	TOTAL SHEETS
7	NEVADA	1-015-1 (22) 40	Clark	03-083		113	130


Reference Sheet J-5

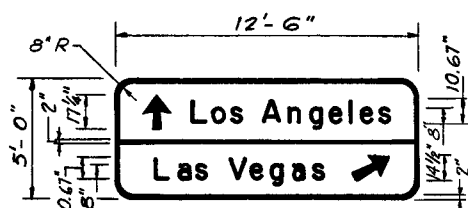


G-11
INSTALLATION ⑩

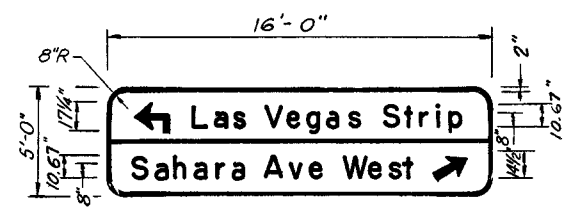


G-12
INSTALLATION ⑱

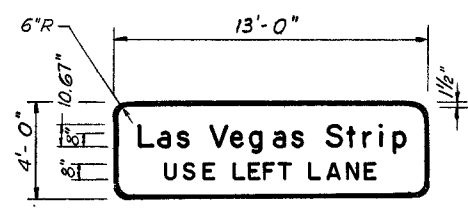


G-13
INSTALLATION ⑰

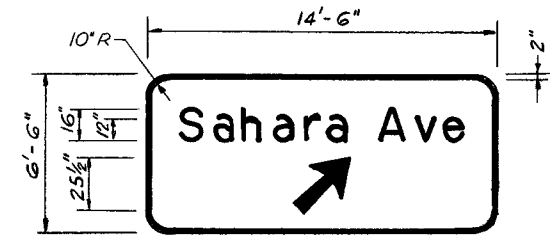

G-14
INSTALLATION ⑳

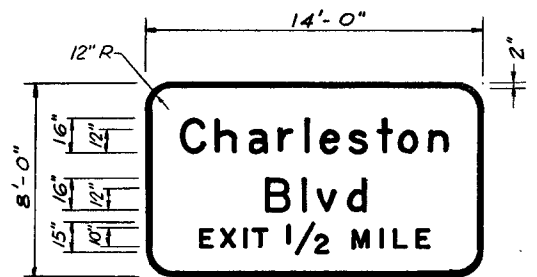


G-17
INSTALLATION ㉕

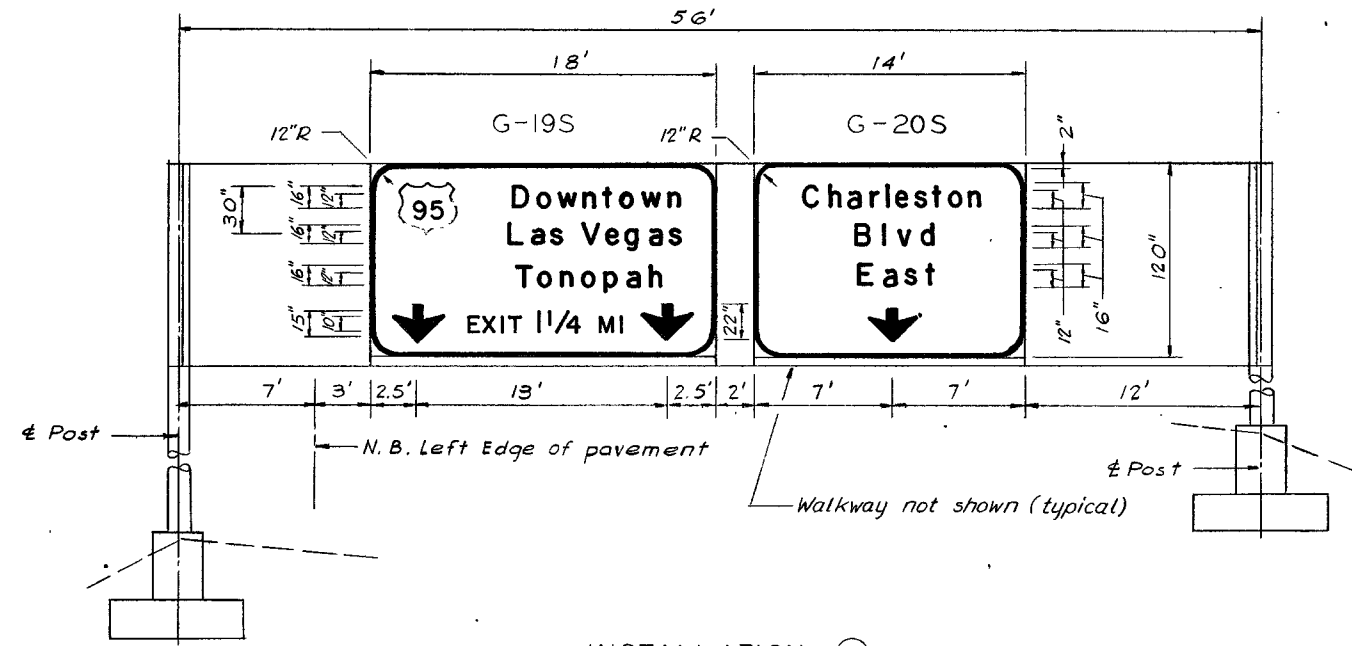


INSTALLATION ㉓

GUIDE SIGN NOTES


1. Sign Design specifications in accordance with AASHO Manual for Signing and Pavement Markings of the National System of Interstate and Defense Highways, with revisions.
2. Ground Mounted "G" Series Signs shown on Sign Layout Sheets, reflectorized white letters, numerals, arrows and borders on reflectorized green background.
3. Overhead "G" Series Sign Panels, identified with letter "S", have screened white letters, numerals, arrows, and borders on non-reflectorized green porcelain background.
4. All overhead signs are to be illuminated. Ballast boxes required are shown in Remark column of Sign Data Sheets.
5. For location of Sign Structures Guard Rail see Paving Plans; for Details see Sheet 5 (Return Section) & Std. Guard Rail Details.
6. Sign Panel corner radii to be 1/8 min. sign dimension with 12" maximum. Panel material outside of Radii is to be cut on all ground mounted signs. Corner Radii on Overhead Signs not to be cut.
7. Panel border widths are
 1 1/2" - 20 to 60 S F
 2" - 60 to 200 S F
 3" - 200 S F & Above
8. Interstate Shields on Overhead "S" Signs are to be porcelain on steel cutouts riveted to sign face. The U.S. Shield has a white background with black numerals. The Interstate Shield is to be as Specified for " Interstate Shield on Guide Signs " in the AASHO Manual referred to in Note 1.

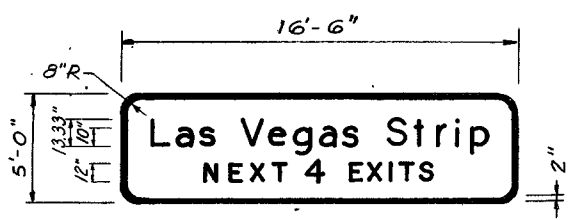

G-18
INSTALLATION ㉔

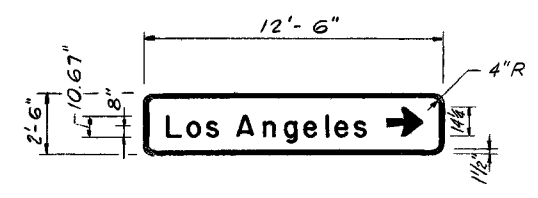

G-21
INSTALLATION ㉑

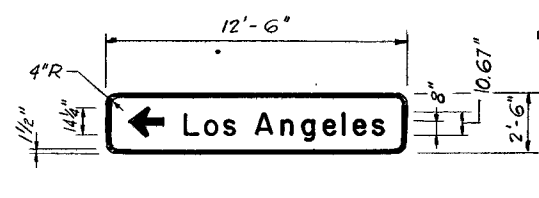

G-22
INSTALLATION ㉗

59309

107V 3834

STATE OF NEVADA
DEPARTMENT OF HIGHWAYS 75

GUIDE SIGN DETAILS

LAS VEGAS FREEWAY

DE LEUW, CATHAR & COMPANY ENGINEERS

SCALE: _____
DESIGNED BY: M.A.S.
DRAWN BY: R.D.L.