

MANHOLE SCHEDULE

MH #	NORTHING	EASTING	N. INV. EL.	S. INV. EL.	E. INV. EL.	W. INV. EL.	COMMENT
1	4785.9973	3703.9795	----	----	2483.50	----	PUBLIC
2	4787.5166	3985.2705	----	----	2474.86	2474.86	PUBLIC
3	4789.0828	4275.2663	2465.76	----	----	2465.96	PUBLIC
4	4984.3931	4517.3490	----	2462.36	2462.16	2453.87	PUBLIC
5	4983.0607	4270.6526	----	----	2453.67	2453.87	PUBLIC

QUANTITY ESTIMATES

SEWER

ITEM #	DESCRIPTION	UNIT	QUANTITY	PUBLIC	PRIVATE
1	48" SEWER MANHOLE		5 EA	X	
2	8" PVC SEWER MAIN		1428 LF	X	
3	4" PVC SEWER LATERALS		33 EA		X
4	12" PVC SEWER MAIN		----	X	

WATER

ITEM #	DESCRIPTION	UNIT	QUANTITY	PUBLIC	PRIVATE
1	FIRE HYDRANT ASSEMBLY PER UDACS PLATE #7		2 EA	X	
2	8" PVC WATERLINE		605 LF	X	
3	6" PVC WATERLINE		113 LF	X	
4	8" GATE VALVE		2 EA	X	
5	8" - 90° FITTING		1 EA	X	
6	CAP & BLOW-OFF ASSY. PER UDACS PLATE #4		1 EA	X	
7	12" X 8" TEE		1 EA	X	
8	1" SERVICE W/ 5/8" WM PER UDACS PLATE #1B		33 EA	X	
9	1" IRRIGATION METER		1 EA	X	
10	1" REDUCED PRESSURE PRINCIPLE ASSEMBLY		1 EA	X	
11	8" X 6" REDUCER		1 EA	X	
12	12" - 45° FITTING		4 EA	X	
13	12" PVC WATERLINE		20 LF	X	

SURFACE IMPROVEMENT

ITEM #	DESCRIPTION	QUANTITY	PUBLIC	PRIVATE
1	CROSS GUTTER	933 SF	X	
2	"L" CURB	2,300 LF	X	
3	4" ASPHALTIC CONCRETE PAVING	3,378 SY	X	
4	3" ASPHALTIC CONCRETE PAVING	687 SY	X	
5	2" ASPHALTIC CONCRETE PAVING	3,343 SY	X	
6	TYPE I GRAVEL	1,517 CY	X	
7	TYPE II GRAVEL	1,307 CY	X	
8	5" THICK SIDEWALK	11,969 SF	X	
9	POWER TO LOTS	33 EA	X	
10	TELEPHONE TO LOTS	33 EA	X	
11	STREETLIGHTS	12 EA	X	

KB HOME NEVADA, INC.

750 PILOT ROAD, SUITE F
LAS VEGAS, NEVADA 89119
(702) 614-2500



TETRA TECH, INC.
INFRASTRUCTURE & OUTREACH GROUP
401 N. DOWNEY DR., SUITE 200, LAS VEGAS, NEVADA 89145
(702) 242-4200

QUANTITIES AND SCHEDULES

GOLDRUSH V(a)
CITY OF LAS VEGAS, NEVADA


SHEET

QUALITY CONTROL BY:

QUALITY CONTROL BY:

SCALE

PROJECT NO.
P08042-0027

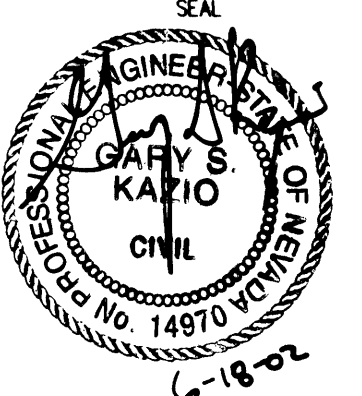

SHEET

C4
4 OF 13

DRAWING NO.
107Y-4648-Sa