

- REMOVAL ITEMS**
- REMOVE MH
- CONSTRUCTION ITEMS**
- "W" 2+140.000, 4.169m LT TO CONSTRUCT 375mm SANITARY SEWER PIPE
 "W" 2+170.000, 2.075m LT
 "W" 2+170.000, 2.075m LT TO
 "W" 2+178.169, 1.504m LT
 "W" 2+162.256, 5.690m RT TO
 "W" 2+162.958, 4.100m RT
 "W" 2+162.958, 4.100m RT TO
 "W" 2+170.000, 2.075m LT
 - "W" 2+178.169, 1.504m LT CONSTRUCT TYPE I SANITARY SEWER MH
 "W" 2+162.256, 5.690m RT
 - "W" 2+169.048, 2.438m RT TO RELOCATE 200mm WATER LINE SEE DETAIL THIS SHEET
 "W" 2+181.205, 3.003m RT
 - "W" 2+170.000, 2.075m LT CONSTRUCT TYPE I T-LOCK LINED SANITARY SEWER MH
 "W" 2+162.958, 4.100m RT
- MATERIALS LIST**
- 200mm DIA, 45° DOWNWARD BEND PER LVVWD UDS PLATE No. 5

DATE	
REVISIONS	
PROJECT #	31604
DESIGN BY	BBP
SCALE (V)	1:50
DATE	DECEMBER 17, 1998
SCALE (H)	1:250
F.L.D. BK. #	N/A

APPROVED FOR CONSTRUCTION

LAS VEGAS VALLEY WATER DISTRICT DATE


Call before you Dig.
1-800-277-2800
UNDERGROUND SERVICE (USA)

Call before you Overhead
563-6111
OVERHEAD SERVICE (USA)

DEPARTMENT OF PUBLIC WORKS
I-15 FREEWAY CHANNEL
UTILITY RELOCATION (WESTERN AVE)
"W" 2+140 TO "W" 2+181.21

STATE OF NEVADA
JON P. CLARK
CIVIL ENGINEER

DRAWING No. 183
U-24
241

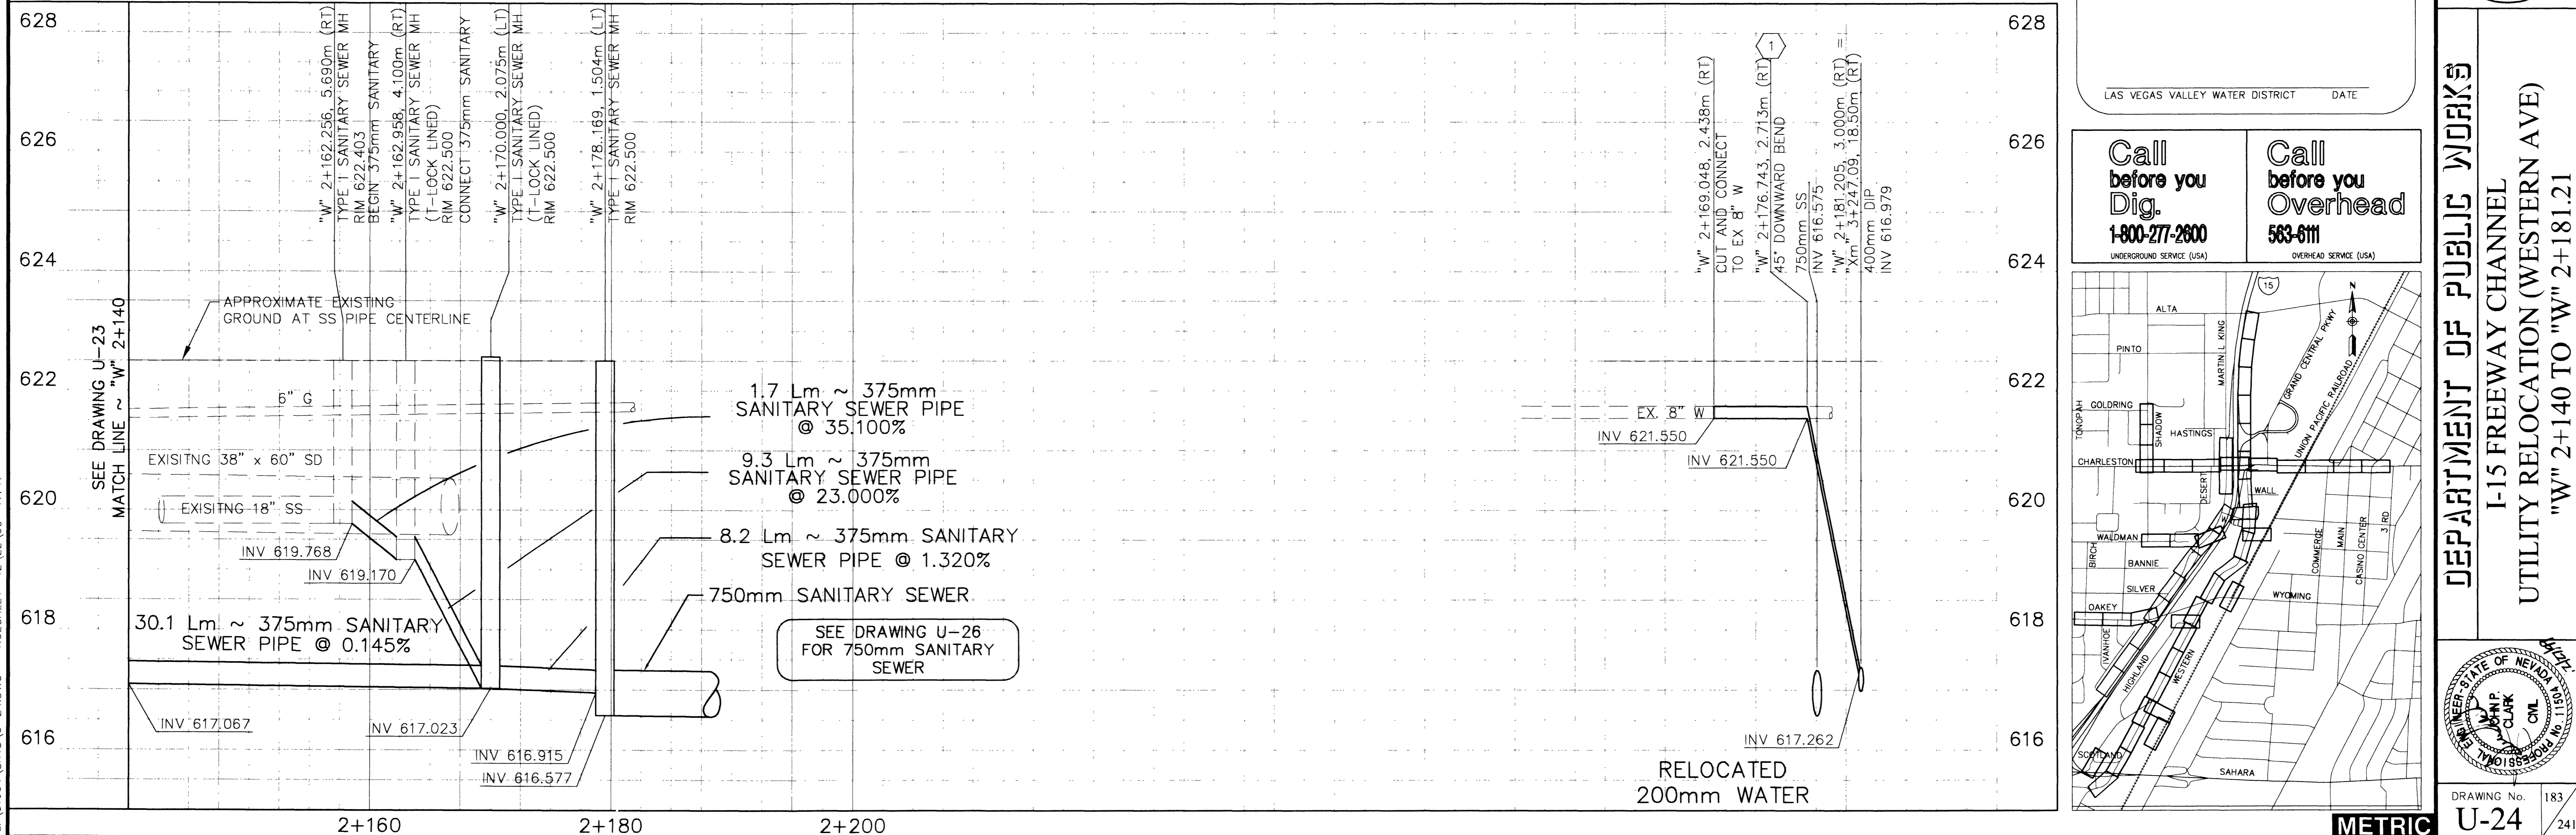

L:\31604\SHS\U-24.DWG KOECHLEY 12/22/98 17:47