


4-13-270

APPROXIMATE QUANTITIES			
ITEM	DESCRIPTION	UNIT	QUANTITY

FOR INFORMATION ONLY		Scale (h) 1/4"=1'-0"	Scale (v) SAME	W. 2131
Fid. bk. no.	Date	Design by D. McGonigle	Drawn by J. McDowell	

Revisions	Date

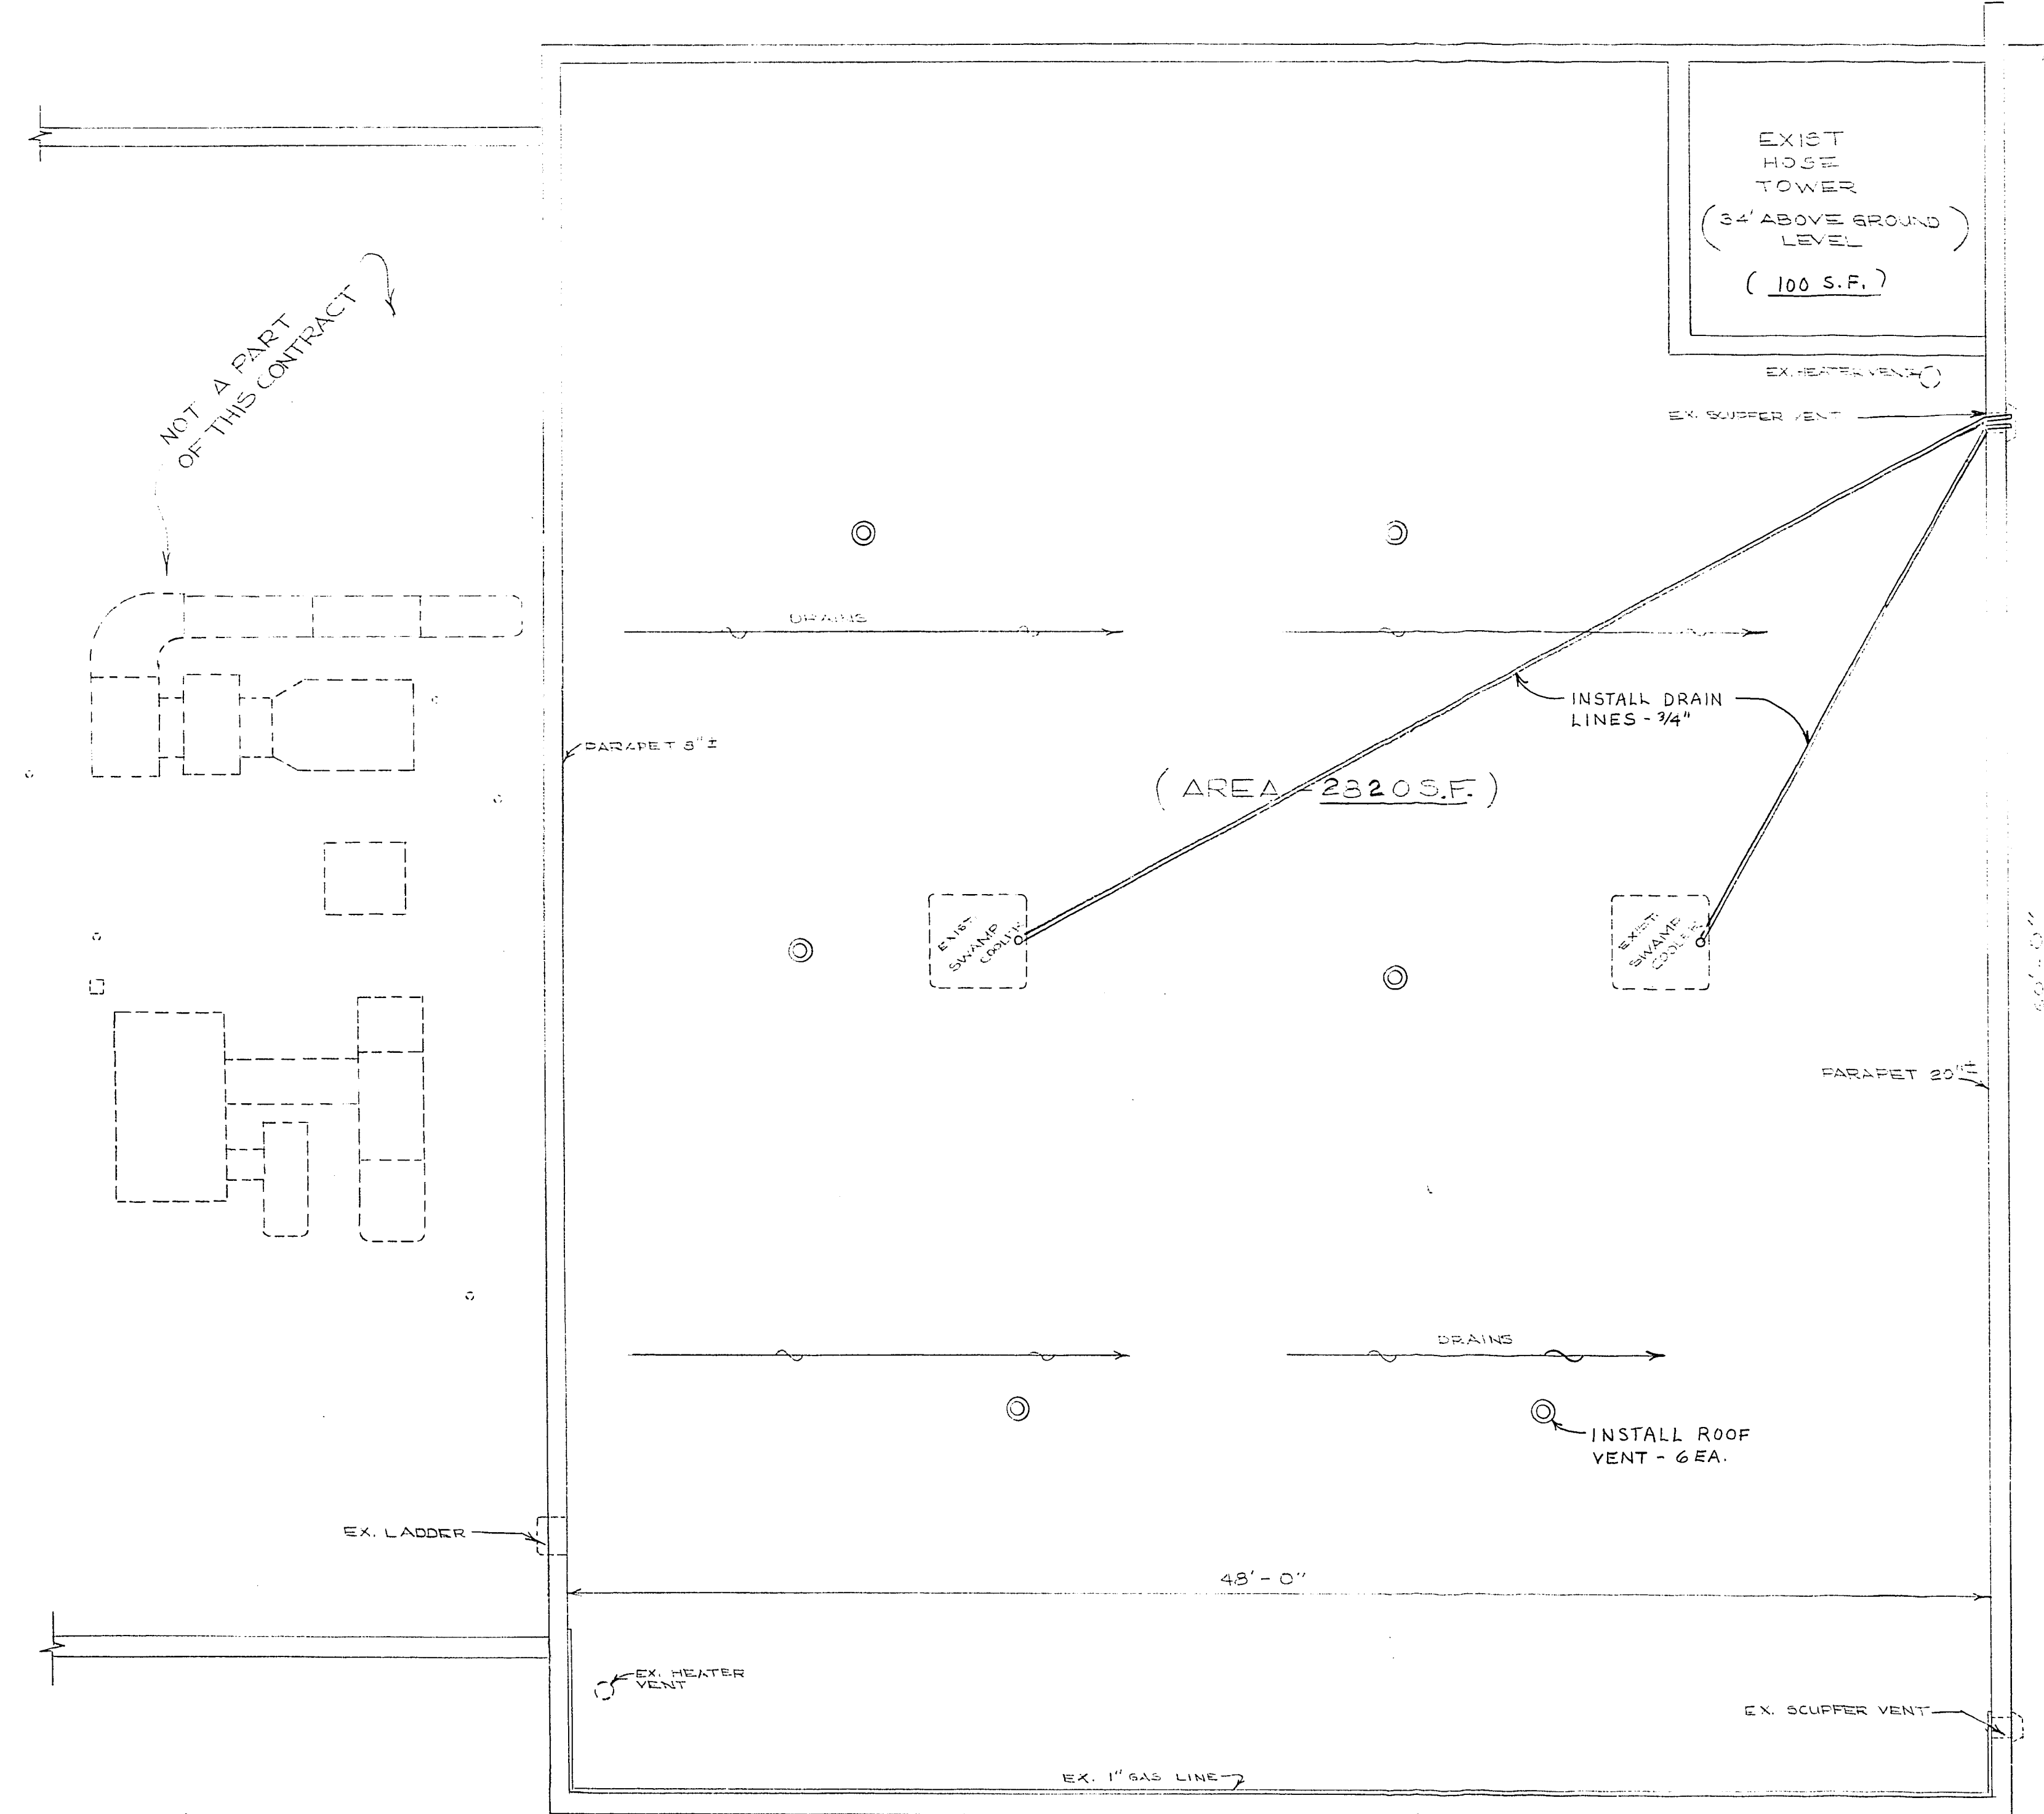

ROOF REPAIR PLAN - 2920 S.F.
SCALE: 1/4" = 1'-0"

- GENERAL NOTES**
1. CLEAN AND PREPARE EXIST. BUILT UP ROOF FOR NEW ROOFING. - 2920 S.F.
 2. INSTALL URETHANE ROOFING WITH SILICONE CAP - 2920 S.F.
 3. INSTALL 9 EACH ROOF VENTS AT APPROX. LOCATIONS SHOWN ON DRAWING.
 4. INSTALL 3/4" POLYETHYLENE EVAPORATIVE COOLER DRAIN LINES (2 EA.)
 5. EVAPORATIVE COOLERS SHALL BE RAISED TO INSTALL ROOFING SYSTEM AND DRAIN LINES.

APPROVALS

<i>Don J. Smyke</i>	4-2-82
DEPUTY CITY MANAGER	DATE
<i>Donald E. ...</i>	5/21/82
DIRECTOR OF PUBLIC SERVICES	DATE
<i>...</i>	3/30/82
CITY ENGINEER	DATE
<i>...</i>	3/29/82
CHIEF OF QUALITY CONTROL	DATE
<i>...</i>	3/29/82
CHIEF OF ENGINEERING DESIGN	DATE
<i>...</i>	2-25-82
CHIEF OF MAINTENANCE	DATE
<i>...</i>	2-26-82
FIRE SERVICES	DATE

CONTRACT
DRAWING



Drawing no.
630-72